



OIL ANALYSIS REPORT

Sample Rating Trend


NORMAL



Machine Id
928075-205272

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

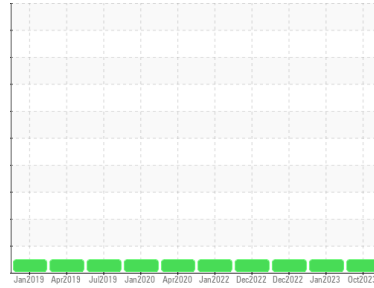

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. No other contaminants were detected in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	GFL0080052	GFL0069437	GFL0065996	
Sample Date	Client Info	04 Oct 2023	11 Jan 2023	13 Dec 2022	
Machine Age	hrs	Client Info	12234	11951	11754
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info	Not Chngd	Not Chngd	Changed	
Sample Status		NORMAL	NORMAL	NORMAL	

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	88	46	9
Chromium	ppm ASTM D5185m >20	3	2	<1
Nickel	ppm ASTM D5185m >4	<1	0	0
Titanium	ppm ASTM D5185m	<1	0	0
Silver	ppm ASTM D5185m >3	0	0	0
Aluminum	ppm ASTM D5185m >20	45	6	2
Lead	ppm ASTM D5185m >40	<1	<1	<1
Copper	ppm ASTM D5185m >330	17	2	<1
Tin	ppm ASTM D5185m >15	<1	<1	1
Vanadium	ppm ASTM D5185m	<1	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	5	<1	3
Barium	ppm ASTM D5185m 0	12	0	0
Molybdenum	ppm ASTM D5185m 60	35	61	63
Manganese	ppm ASTM D5185m 0	3	<1	<1
Magnesium	ppm ASTM D5185m 1010	920	903	965
Calcium	ppm ASTM D5185m 1070	1298	1128	1126
Phosphorus	ppm ASTM D5185m 1150	908	1013	1110
Zinc	ppm ASTM D5185m 1270	1128	1247	1291
Sulfur	ppm ASTM D5185m 2060	2820	2812	3565

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	12	16	11
Sodium	ppm ASTM D5185m	4	3	2
Potassium	ppm ASTM D5185m >20	98	2	0

INFRA-RED





method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	1.1	1.7	0.2
Nitration	Abs/cm *ASTM D7624 >20	13.6	11.6	6.0
Sulfation	Abs/.1mm *ASTM D7415 >30	28.6	22.8	19.3

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	25.5	17.6	14.6
Base Number (BN)	mg KOH/g ASTM D2896 9.8	4.3	7.0	9.8







OIL ANALYSIS REPORT

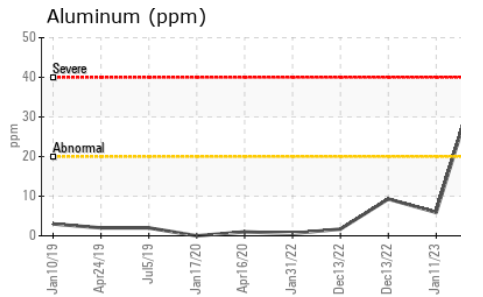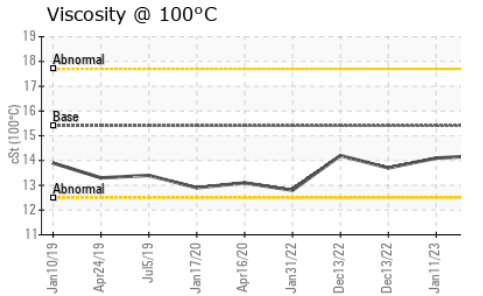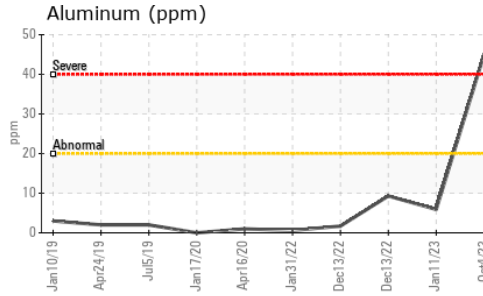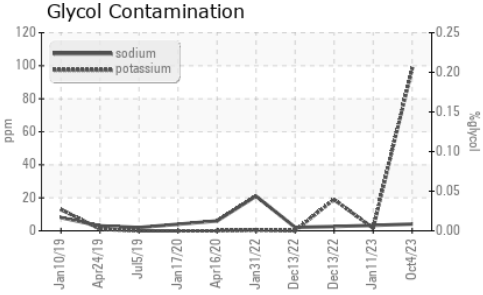

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.2	14.1

GRAPHS

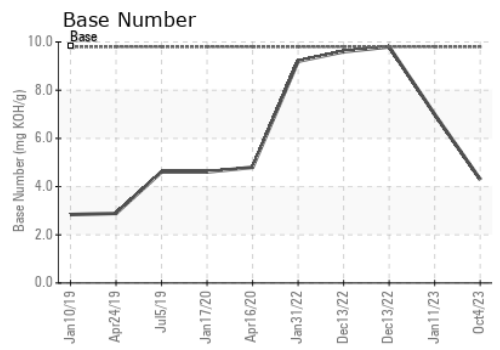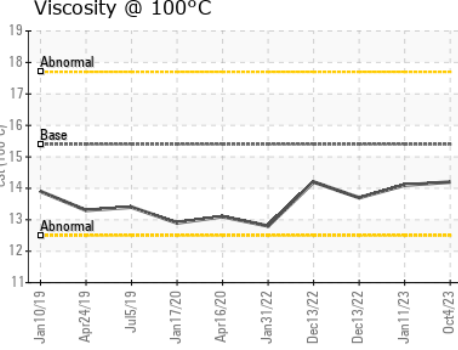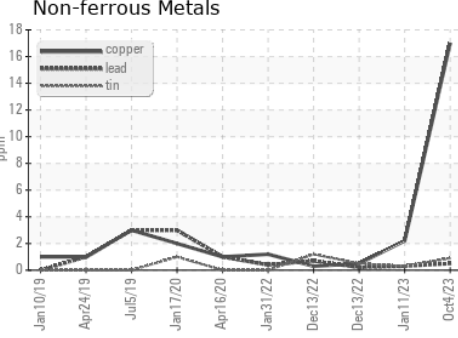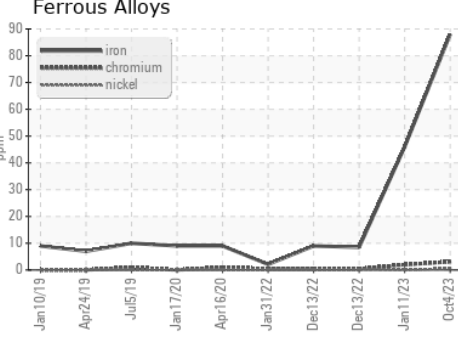

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0080052 **Received** : 13 Oct 2023
Lab Number : 05978698 **Diagnosed** : 17 Oct 2023
Unique Number : 10695993 **Diagnostician** : Don Baldrige
Test Package : FLEET

GFL Environmental - 844 - Princeton Hauling
 10129 Highway 62 West
 Princeton, KY
 US 42445
 Contact: Kenneth Bigers
 kbigers@gflenv.com
 T: (270)970-0371
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)