




# OIL ANALYSIS REPORT

## Sample Rating Trend

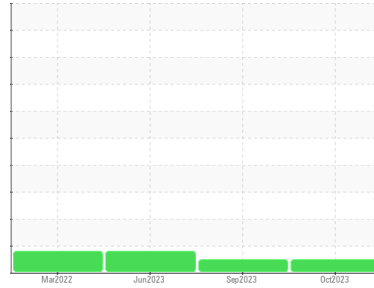

**NORMAL**



Machine Id  
**812024**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 40. Please confirm. Please specify the component make and model with your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>GFL0083912</b>	GFL0083859	GFL0061509
Sample Date	Client Info			<b>13 Oct 2023</b>	01 Sep 2023	07 Jun 2023
Machine Age	hrs	Client Info		<b>3833</b>	3526	847
Oil Age	hrs	Client Info		<b>3833</b>	600	847
Oil Changed	Client Info			<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>10</b>	19	23
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	1
Nickel	ppm	ASTM D5185m	>4	<b>2</b>	3	▲ 12
Titanium	ppm	ASTM D5185m		<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>20	<b>0</b>	0	<1
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>330	<b>3</b>	5	11
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	<b>6</b>	4	5
Barium	ppm	ASTM D5185m	10	<b>2</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>59</b>	55	60
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	450	<b>825</b>	971	902
Calcium	ppm	ASTM D5185m	3000	<b>1023</b>	1108	1175
Phosphorus	ppm	ASTM D5185m	1150	<b>928</b>	957	885
Zinc	ppm	ASTM D5185m	1350	<b>1078</b>	1275	1205
Sulfur	ppm	ASTM D5185m	4250	<b>2660</b>	2970	2796



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>3</b>	4	4
Sodium	ppm	ASTM D5185m	>216	<b>0</b>	6	4
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	1	0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.5</b>	0.9	0.8
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.8</b>	8.9	9.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.6</b>	21.4	20.9

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>13.8</b>	17.0	16.4
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>7.8</b>	6.5	6.8







# OIL ANALYSIS REPORT

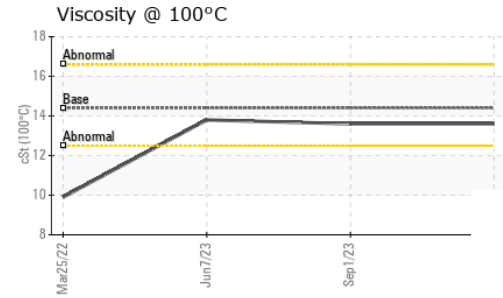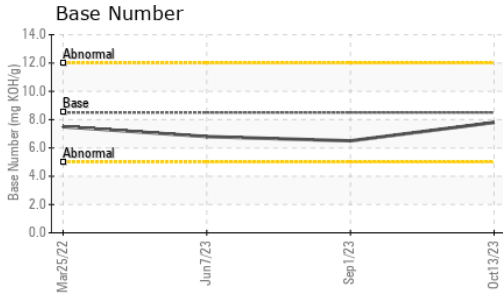

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.6</b>	13.6	13.8

## GRAPHS

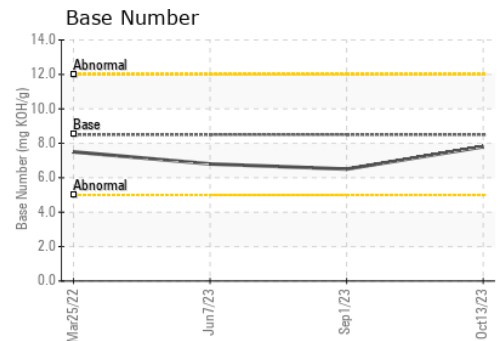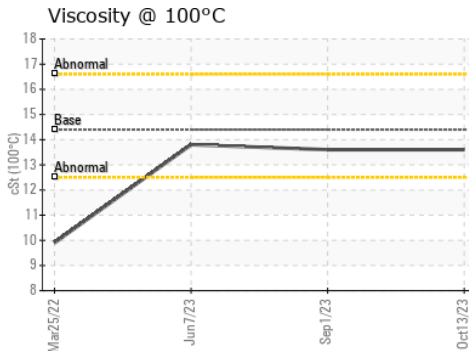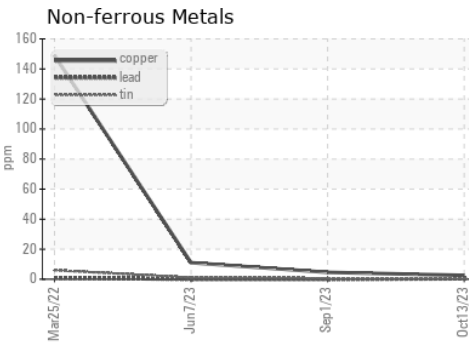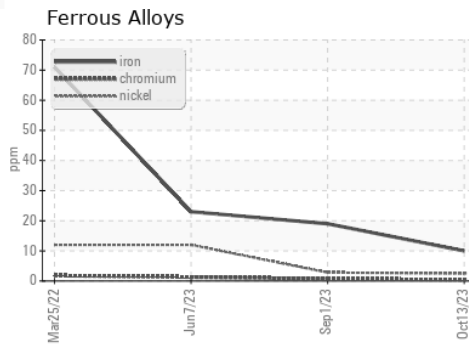

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0083912 **Received** : 16 Oct 2023  
**Lab Number** : 05979495 **Diagnosed** : 17 Oct 2023  
**Unique Number** : 10696790 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 652 - Fredericksburg Hauling**  
 10954 Houser Drive  
 Fredericksburg, VA  
 US 22408  
 Contact: WILLIAM MILO  
 wmilo@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: