


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

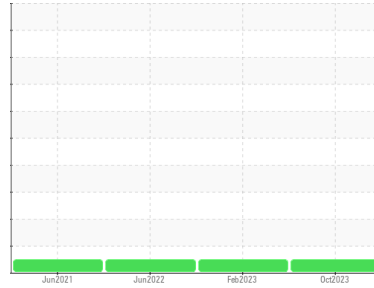

Machine Id  
**145 (S/N J428020)**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON HP 15W40 (--- LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0044175</b>	PCA0044133	PCA0044227
Sample Date	Client Info			<b>07 Oct 2023</b>	01 Feb 2023	17 Jun 2022
Machine Age	mls	Client Info		<b>163995</b>	134637	107113
Oil Age	mls	Client Info		<b>29358</b>	27524	25027
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>33</b>	32	33
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	2	2
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185m	>20	<b>14</b>	16	18
Lead	ppm	ASTM D5185m	>40	<b>10</b>	7	7
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	1	1
Tin	ppm	ASTM D5185m	>15	<b>2</b>	2	2
Antimony	ppm	ASTM D5185m		<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	0	5
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>63</b>	61	61
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>1118</b>	962	939
Calcium	ppm	ASTM D5185m		<b>1164</b>	1079	1053
Phosphorus	ppm	ASTM D5185m		<b>1038</b>	992	1014
Zinc	ppm	ASTM D5185m		<b>1550</b>	1261	1283
Sulfur	ppm	ASTM D5185m		<b>3209</b>	2952	2845

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>12</b>	14	10
Sodium	ppm	ASTM D5185m		<b>2</b>	2	2
Potassium	ppm	ASTM D5185m	>20	<b>28</b>	33	37

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.7</b>	0.6	0.6
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.5</b>	11.2	11.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>23.9</b>	23.2	23.4

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>20.3</b>	19.2	19.6
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>7.19</b>	7.52	7.01









# OIL ANALYSIS REPORT

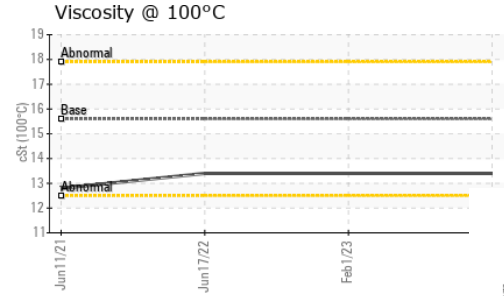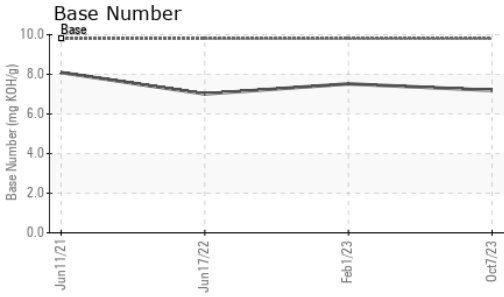

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.6	<b>13.4</b>	13.4	13.4

## GRAPHS

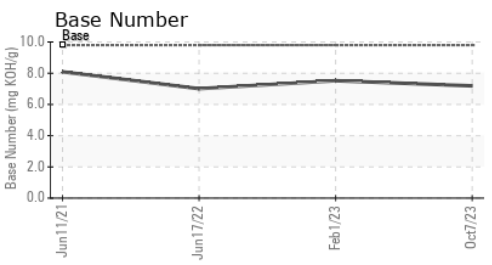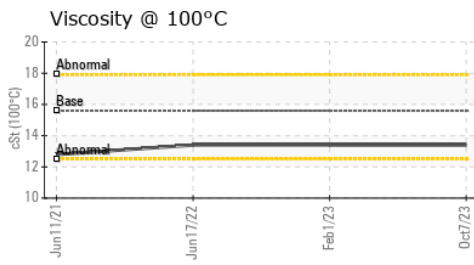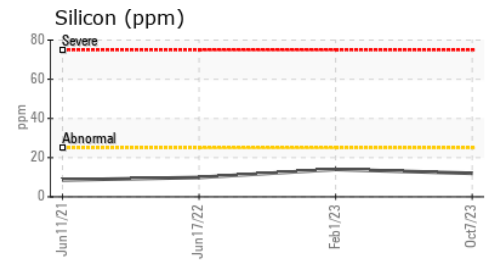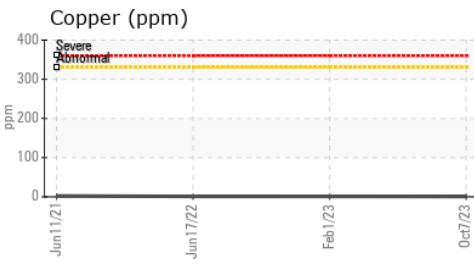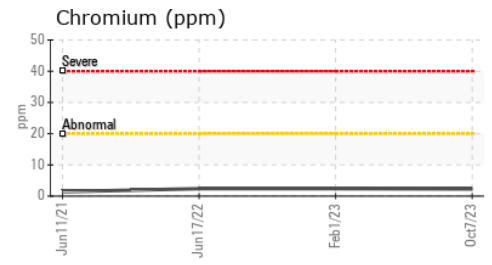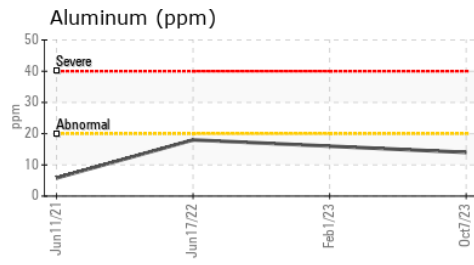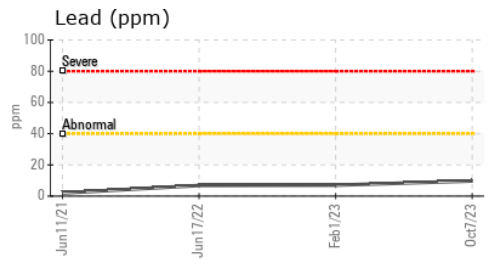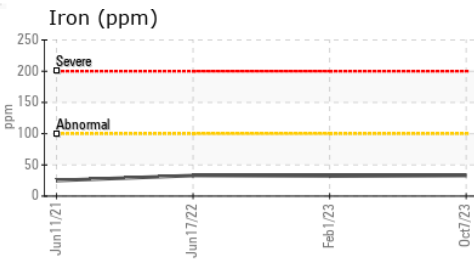

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0044175 **Received** : 16 Oct 2023  
**Lab Number** : **05980634** **Diagnosed** : 17 Oct 2023  
**Unique Number** : 10697929 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

**GARY INGRAM GRADING & PAVING**  
 1767 GRIFFIN SHOULS RD  
 DADEVILLE, AL  
 US 36853  
 Contact: RON INGRAM  
 ron.ingram@ingrampaving.com  
 T: (256)825-6878  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)