


OIL ANALYSIS REPORT





KEMP QUARRIES / KEMP STONE - FAIRLAND WL128 Component Rear Left Final Drive Fluid

PETRO CANADA PRODURO TO-4 SAE 50 (--- GAL)


| DIAGNOSIS | SAMPLE INFOR | RMATION | method | limit/base | current | history1 | history2 |
|---|---------------------|------------|----------------------------|------------|---------------|---------------------------------------|---------------------|
| Recommendation | Sample Number | | Client Info | | PCA0084757 | PCA0084602 | PCA0086004 |
| Resample at the next service interval to monitor. (| Sample Date | | Client Info | | 06 Oct 2023 | 10 Jul 2023 | 20 Apr 2023 |
| customer Sample Comment: PM-3 sampled fluid) | Machine Age | hrs | Client Info | | 34458 | 33887 | 33426 |
| /ear | Oil Age | hrs | Client Info | | 34458 | 33887 | 33426 |
| l component wear rates are normal. | Oil Changed | | Client Info | | N/A | N/A | N/A |
| ontamination | Sample Status | | | | NORMAL | NORMAL | NORMAL |
| nere is no indication of any contamination in the | WEAR METAL | S | method | limit/base | current | history1 | history2 |
| uid Condition | Iron | ppm | ASTM D5185m | >800 | 395 | 276 | 196 |
| e condition of the oil is acceptable for the time in | Chromium | ppm | ASTM D5185m | >10 | 4 | <1 | <1 |
| vice. | Nickel | ppm | ASTM D5185m | >5 | <1 | <1 | 0 |
| | Titanium | ppm | ASTM D5185m | >15 | <1 | <1 | <1 |
| | Silver | ppm | ASTM D5185m | | 0 | 0 | 0 |
| | Aluminum | ppm | ASTM D5185m | | 5 | 3 | 2 |
| | Lead | ppm | ASTM D5185m | | 0 | <1 | 0 |
| | Copper | ppm | ASTM D5185m | | 2 | 2 | <1 |
| | Tin | ppm | ASTM D5185m | | 0 | 0 | 0 |
| | Vanadium | ppm | ASTM D5185m | 20 | 0 | 0 | 0 |
| | Cadmium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| | ADDITIVES | le le | method | limit/base | | history1 | history2 |
| | Boron | ppm | ASTM D5185m | | 0 | 2 | 0 |
| | Barium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| | Molybdenum | | ASTM D5185m | | 4 | 3 | 2 |
| | Manganese | ppm | ASTM D5185m | | 3 | 2 | 2 |
| | Magnesium | ppm | ASTM D5185m | | 20 | 15 | 18 |
| | Calcium | ppm | | | 20 4168 | 3357 | 3290 |
| | | ppm | ASTM D5185m | | 1175 | | 925 |
| | Phosphorus | ppm | ASTM D5185m | | | 961 | |
| | Zinc Sulfur | ppm | ASTM D5185m ASTM D5185m | | 1526 6183 | 1183 5104 | 1122 5187 |
| | | ppm | | | | | |
| | CONTAMINAN | | method | limit/base | current 48 | history1 37 | history2 |
| | | ppm | ASTM D5185m | >400 | | | 33 |
| | Sodium Potassium | ppm ppm | ASTM D5185m ASTM D5185m | >20 | <1 2 | 0 | 1 |
| | VISUAL | | method | limit/base | | history1 | history2 |
| | White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| | Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| | Precipitate | scalar | *Visual | NONE | NONE | NONE | NONE |
| | Silt | | *Visual | NONE | NONE | NONE | NONE |
| | Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| | Sand/Dirt | scalar | | NONE | NONE | NONE | NONE |
| | Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| | Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| | Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG | NEG |
| | Free Water | scalar | | >U.L | NEG | NEG | NEG |
| | FLUID PROPE | | method | limit/base | | history1 | history2 |
| | | | | | | · · · · · · · · · · · · · · · · · · · | |
| ort Id: KEMFAI [WUSCAR] 05980743 (Generated: 10/19/2023 | Visc @ 40°C | cSt | ASTM D445 | 213.9 | 189 | 192 | 189 Submitted By |


Report Id: KEMFAI [WUSCAR] 05980743 (Generated: 10/19/2023 18:10:49) Rev: 1



OIL ANALYSIS REPORT

SAMPLE IMAGES

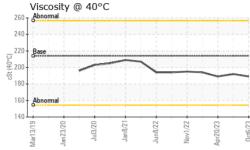

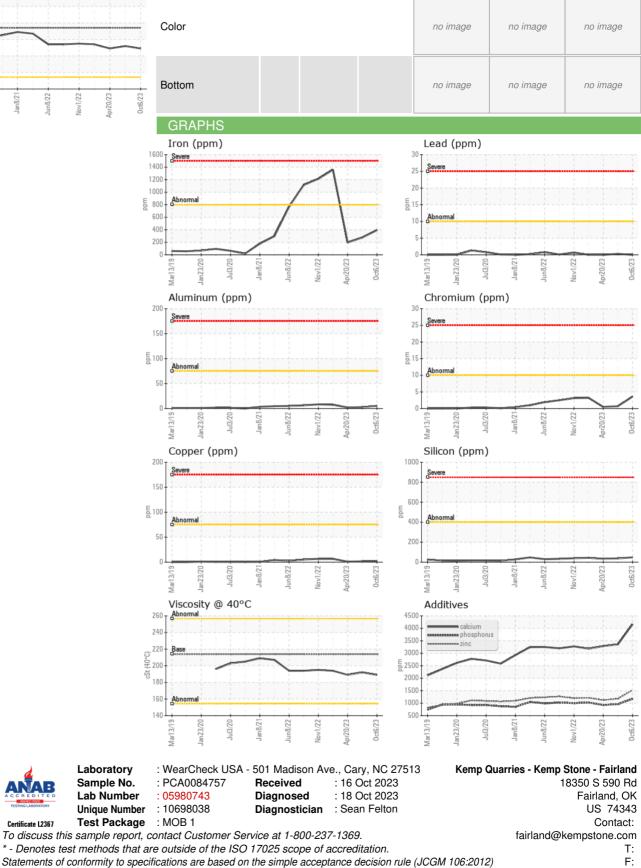

Certificate L2367