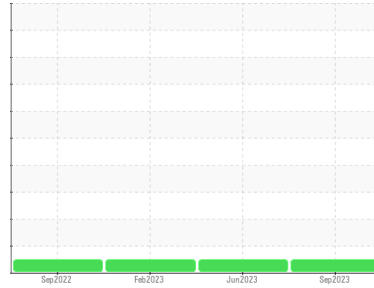


# OIL ANALYSIS REPORT

**Sample Rating Trend**

**NORMAL**


Machine Id  
**tm9585**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (--- GAL)**

**DIAGNOSIS**
**Recommendation**

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

**Wear**

All component wear rates are normal.

**Contamination**

There is no indication of any contamination in the oil.

**Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0106259</b>	PCA0097995	PCA0092322
Sample Date	Client Info			<b>22 Sep 2023</b>	17 Jun 2023	10 Feb 2023
Machine Age	mls Client Info			<b>91601</b>	73078	0
Oil Age	mls Client Info			<b>0</b>	0	0
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>30</b>	35	58
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	<1	2
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>2</b>	<1	4
Aluminum	ppm	ASTM D5185m	>20	<b>9</b>	4	15
Lead	ppm	ASTM D5185m	>40	<b>5</b>	4	7
Copper	ppm	ASTM D5185m	>330	<b>12</b>	16	91
Tin	ppm	ASTM D5185m	>15	<b>1</b>	1	3
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>0</b>	21	5
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	50	<b>68</b>	61	76
Manganese	ppm	ASTM D5185m	0	<b>2</b>	2	3
Magnesium	ppm	ASTM D5185m	950	<b>1101</b>	793	943
Calcium	ppm	ASTM D5185m	1050	<b>1253</b>	1436	1255
Phosphorus	ppm	ASTM D5185m	995	<b>1162</b>	1067	930
Zinc	ppm	ASTM D5185m	1180	<b>1543</b>	1324	1288
Sulfur	ppm	ASTM D5185m	2600	<b>3383</b>	3419	3076

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>5</b>	6	10
Sodium	ppm	ASTM D5185m		<b>5</b>	6	7
Potassium	ppm	ASTM D5185m	>20	<b>14</b>	6	30

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>2.6</b>	1.9	2.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>14.0</b>	12.0	13.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>25.8</b>	24.8	25.8

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>21.2</b>	19.5	21.6
Base Number (BN)	mg KOH/g	ASTM D2896		<b>8.0</b>	9.6	7.6









# OIL ANALYSIS REPORT

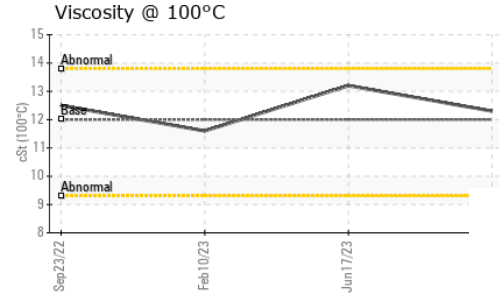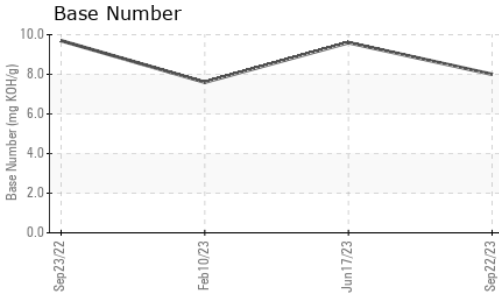

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	12.3	13.2

### GRAPHS

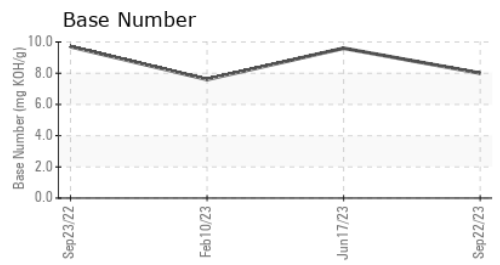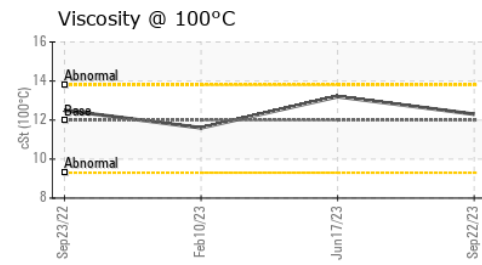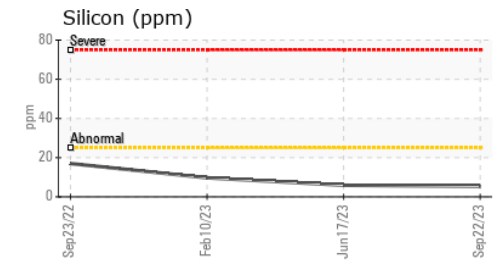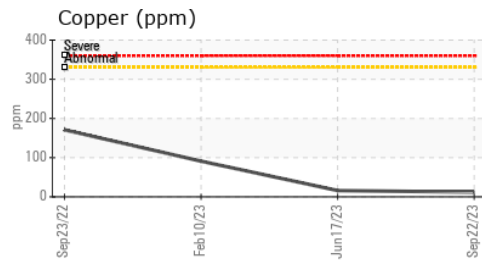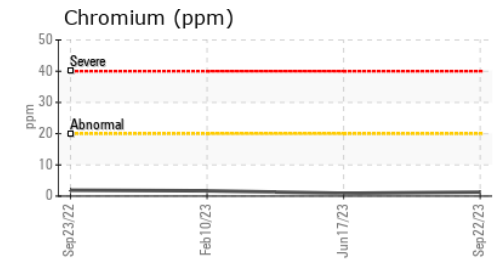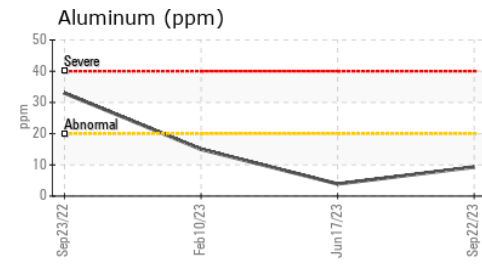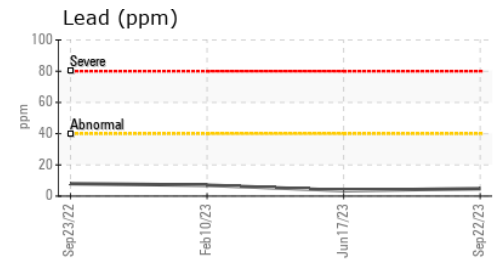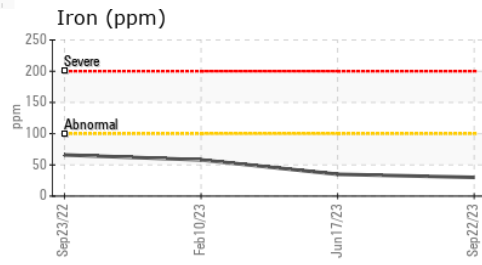

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0106259 **Received** : 17 Oct 2023  
**Lab Number** : 05980828 **Diagnosed** : 17 Oct 2023  
**Unique Number** : 10698123 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**MILLER TRUCK LEASING #119**  
 39 INDUSTRIAL AVE  
 HASBROUCK HEIGHTS, NJ  
 US 07604  
 Contact: MIKE LONGETTE  
 mlongette@millertransgroup.com  
 T:  
 F: (201)528-7053

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)