


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

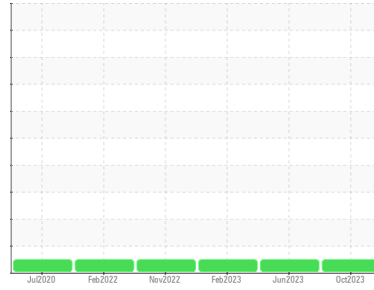

Machine Id  
**206961**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 10W30 (--- QTS)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

### SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>PCA0106303</b>	PCA0098002	PCA0092314	
Sample Date	Client Info	<b>05 Oct 2023</b>	06 Jun 2023	17 Feb 2023	
Machine Age	mls	Client Info	<b>68037</b>	60088	52091
Oil Age	mls	Client Info	<b>0</b>	0	0
Oil Changed	Client Info	<b>Not Chngd</b>	Not Chngd	Changed	
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL	

### CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

### WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>18</b>	6	31
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	0
Nickel	ppm ASTM D5185m >4	<b>&lt;1</b>	<1	0
Titanium	ppm ASTM D5185m	<b>0</b>	0	0
Silver	ppm ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>11</b>	6	9
Lead	ppm ASTM D5185m >40	<b>&lt;1</b>	<1	0
Copper	ppm ASTM D5185m >330	<b>2</b>	3	2
Tin	ppm ASTM D5185m >15	<b>2</b>	2	1
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

### ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 2	<b>2</b>	9	4
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 50	<b>71</b>	61	63
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	1	<1
Magnesium	ppm ASTM D5185m 950	<b>1115</b>	967	852
Calcium	ppm ASTM D5185m 1050	<b>1248</b>	1139	1106
Phosphorus	ppm ASTM D5185m 995	<b>1283</b>	1091	853
Zinc	ppm ASTM D5185m 1180	<b>1593</b>	1342	1112
Sulfur	ppm ASTM D5185m 2600	<b>3884</b>	4065	2892

### CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>6</b>	8	3
Sodium	ppm ASTM D5185m	<b>0</b>	<1	<1
Potassium	ppm ASTM D5185m >20	<b>8</b>	4	5



### INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.6</b>	0.3	0.8
Nitration	Abs/cm *ASTM D7624 >20	<b>9.0</b>	6.9	10.8
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>18.8</b>	19.0	20.6

### FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>15.0</b>	15.4	17.4
Base Number (BN)	mg KOH/g ASTM D2896	<b>8.1</b>	8.7	7.9









# OIL ANALYSIS REPORT

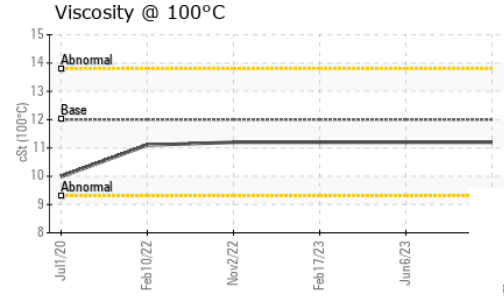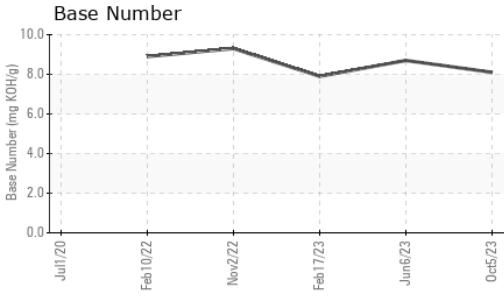

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.2	11.2

## GRAPHS

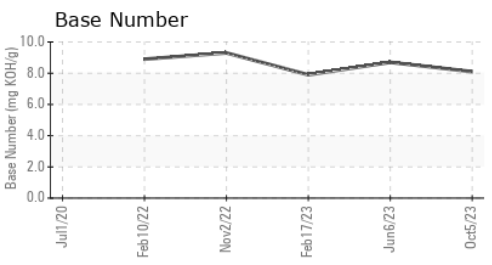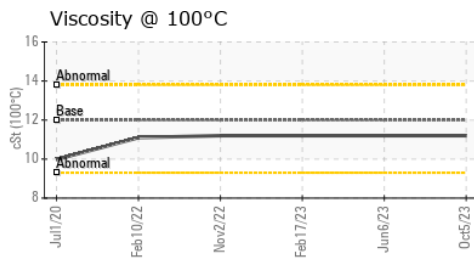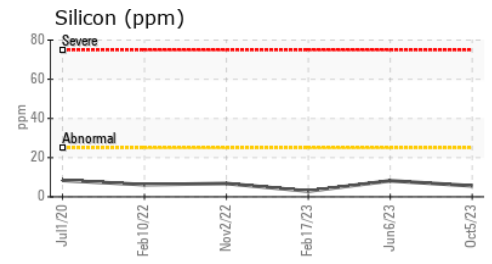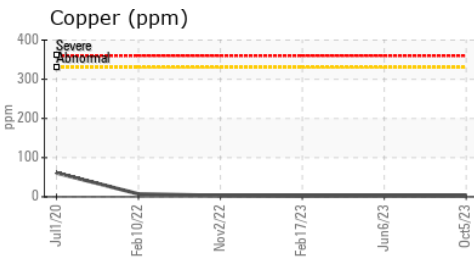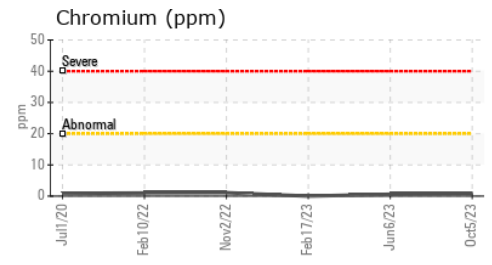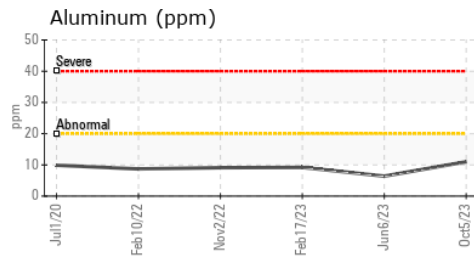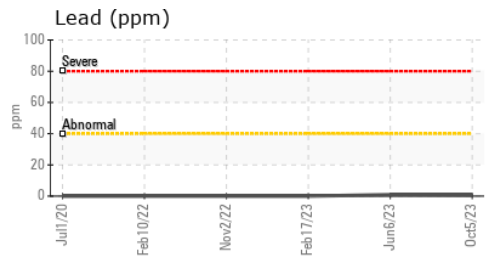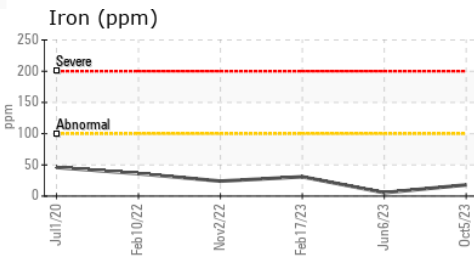

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0106303 **Received** : 17 Oct 2023  
**Lab Number** : 05980841 **Diagnosed** : 18 Oct 2023  
**Unique Number** : 10698136 **Diagnostician** : Don Baldrige  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**MILLER TRUCK LEASING #119**  
 39 INDUSTRIAL AVE  
 HASBROUCK HEIGHTS, NJ  
 US 07604  
 Contact: MIKE LONGETTE  
 mlongette@millertransgroup.com  
 T:  
 F: (201)528-7053

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)