

## **OIL ANALYSIS REPORT**







Machine Id **177** Component **Diesel Engine** Fluid

## PETRO CANADA DURON SHP 10W30 (--- GAL)

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

Metal levels are typical for a components first oil change.

#### Contamination

There is no indication of any contamination in the oil.


#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0107960		
Sample Date		Client Info		16 Oct 2023		
Machine Age	hrs	Client Info		17973		
Oil Age	hrs	Client Info		17973		
Oil Changed		Client Info		N/A		
Sample Status				NORMAL		
CONTAMINAT	ION	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0		
Glycol		WC Method		NEG		
WEAR METAL	S	method	limit/base	current	history1	history2
Iron Chromium	ppm	ASTM D5185m ASTM D5185m	>100 >20	15 <1		
Nickel	ppm	ASTM D5185m	>20	<1 <1		
Titanium	ppm ppm	ASTM D5185m	24	<1		
Silver	ppm	ASTM D5185m	>3	0		
Aluminum	ppm	ASTM D5185m	>20	3		
Lead	ppm	ASTM D5185m	>40	0		
Copper	ppm	ASTM D5185m	>330	11		
Tin	ppm	ASTM D5185m	>15	<1		
Vanadium	ppm	ASTM D5185m	210	0		
Cadmium	ppm	ASTM D5185m		0		
	66			-		
			line it //		Internet and	la la tarra O
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	2		
Boron Barium	ppm	ASTM D5185m ASTM D5185m	2 0	2 0		
Boron Barium Molybdenum	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50	2 0 66		
Boron Barium Molybdenum Manganese	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 0	2 0 66 <1		 
Boron Barium Molybdenum Manganese Magnesium	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 0 950	2 0 66 <1 1016		
Boron Barium Molybdenum Manganese Magnesium Calcium	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 0 950 1050	2 0 66 <1 1016 1191	   	  
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 0 950 1050 995	2 0 66 <1 1016 1191 1033	   	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 950 1050 995 1180	2 0 66 <1 1016 1191 1033 1357		    
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 0 950 1050 995	2 0 66 <1 1016 1191 1033	   	
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 950 1050 995 1180	2 0 66 <1 1016 1191 1033 1357		    
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon	ppm ppm ppm ppm ppm ppm ppm ppm TS	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 950 1050 995 1180 2600 <b>limit/base</b> >25	2 0 66 <1 1016 1191 1033 1357 2884		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 950 1050 995 1180 2600 <b>limit/base</b> >25	2 0 66 <1 1016 1191 1033 1357 2884 current		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon	ppm ppm ppm ppm ppm ppm ppm ppm TS	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 950 1050 995 1180 2600 <b>limit/base</b> >25	2 0 66 <1 1016 1191 1033 1357 2884 current 6		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm TS	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	2 0 50 950 1050 995 1180 2600 <b>limit/base</b> >25	2 0 66 <1 1016 1191 1033 1357 2884 <u>current</u> 6 2		
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm TS	ASTM D5185m ASTM D5185m	2 0 50 0 950 1050 995 1180 2600 <b>limit/base</b> >25 >20	2 0 66 <1 1016 1191 1033 1357 2884 <u>current</u> 6 2 4	     history1  	     history2  
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED	ppm ppm ppm ppm ppm ppm ppm ppm TS	ASTM D5185m ASTM D5185m	2 0 50 0 950 1050 995 1180 2600 <b>imit/base</b> >25 -20 <b>imit/base</b>	2 0 66 <1 1016 1191 1033 1357 2884 current 6 2 4 4	     history1  	     history2   history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot %	ppm ppm ppm ppm ppm ppm ppm ppm TS	ASTM D5185m ASTM D5185m	2 0 50 0 950 1050 995 1180 2600 <b>Imit/base</b> >25 >20 <b>Imit/base</b> >3	2 0 66 <1 1016 1191 1033 1357 2884 current 6 2 4 current 0.8	     history1  	     history2  history2  history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	2 0 50 0 950 1050 995 1180 2600 <i>limit/base</i> >25 >20 <i>limit/base</i>	2 0 66 <1 1016 1191 1033 1357 2884 <u>current</u> 6 2 8 4 <u>current</u> 0.8 9.9	      history1   history1  	     history2   history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D7844 *ASTM D7844	2 0 50 0 950 1050 995 1180 2600 <i>imit/base</i> >25 >20 <i>imit/base</i> >3 >20 >30	2 0 66 <1 1016 1191 1033 1357 2884 <i>current</i> 6 2 8 4 <i>current</i> 0.8 9.9 21.4 <i>current</i>	     history1  history1  history1	    history2  history2  history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	2 0 50 0 950 1050 995 1180 2600 <i>imit/base</i> >25 >20 <i>imit/base</i> >3 >20 >30	2 0 66 <1 1016 1191 1033 1357 2884 <u>current</u> 6 2 4 <u>current</u> 0.8 9.9 21.4	     history1  history1  history1	    history2  history2  history2




# **OIL ANALYSIS REPORT**



#### Viscosity @ 100°C



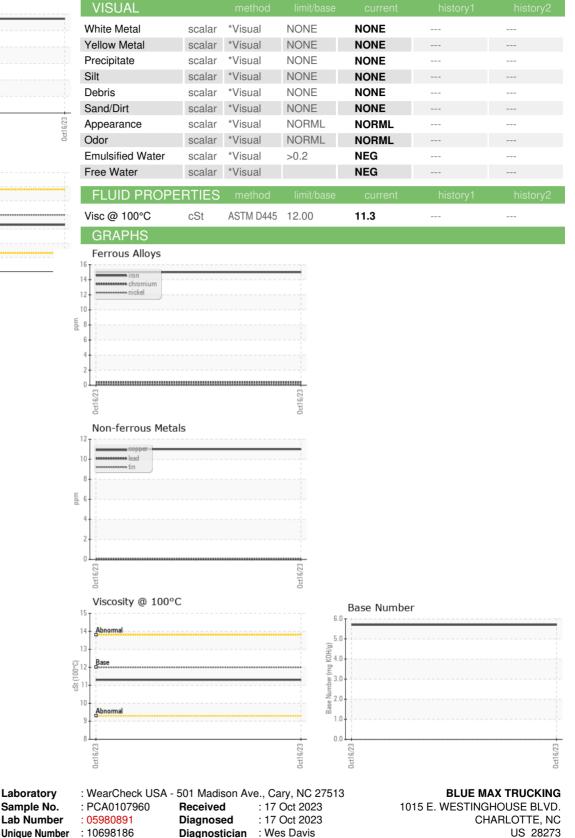



Test Package : FLEET Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: BLUCHA [WUSCAR] 05980891 (Generated: 10/23/2023 02:39:07) Rev: 1

Laboratory

Sample No.

Submitted By: Jody Greer

jgreer@bluemaxtrucking.com

Contact: Jody Greer

T: (980)225-9968

F: (704)588-2901

Page 2 of 2