


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

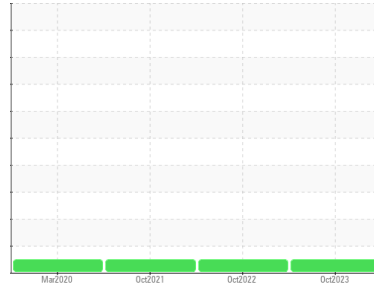

Machine Id  
**FREIGHTLINER 308961**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 10W30 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0101952</b>	PCA0078960	PCA0058712
Sample Date	Client Info			<b>03 Oct 2023</b>	18 Oct 2022	12 Oct 2021
Machine Age	mls	Client Info		<b>228625</b>	182285	132812
Oil Age	mls	Client Info		<b>0</b>	49393	46435
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method		>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	<b>52</b>	38	37
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	2	1
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>30	<b>15</b>	9	16
Lead	ppm	ASTM D5185m	>30	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>30	<b>4</b>	3	4
Tin	ppm	ASTM D5185m	>15	<b>1</b>	2	0
Antimony	ppm	ASTM D5185m		<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>4</b>	0	8
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	50	<b>63</b>	69	65
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	1	<1
Magnesium	ppm	ASTM D5185m	950	<b>829</b>	969	1037
Calcium	ppm	ASTM D5185m	1050	<b>1064</b>	1179	1237
Phosphorus	ppm	ASTM D5185m	995	<b>895</b>	947	907
Zinc	ppm	ASTM D5185m	1180	<b>1111</b>	1276	1202
Sulfur	ppm	ASTM D5185m	2600	<b>2732</b>	3296	4152

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>30	<b>7</b>	5	5
Sodium	ppm	ASTM D5185m		<b>3</b>	4	4
Potassium	ppm	ASTM D5185m	>20	<b>8</b>	4	15

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>1.2</b>	1	0.8
Nitration	Abs/cm	*ASTM D7624	>20	<b>14.1</b>	14.1	12.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>26.3</b>	27.0	25

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>24.1</b>	24.0	21.9
Base Number (BN)	mg KOH/g	ASTM D2896		<b>5.4</b>	6.4	---









# OIL ANALYSIS REPORT

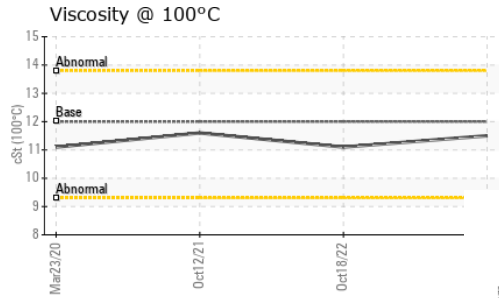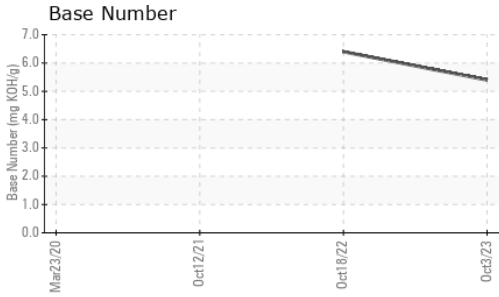

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.5	11.1

## GRAPHS

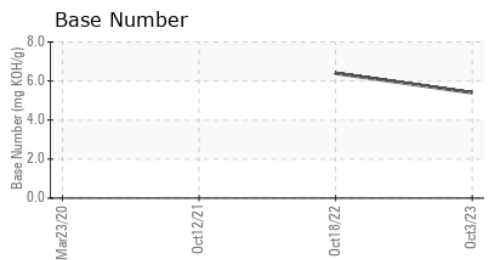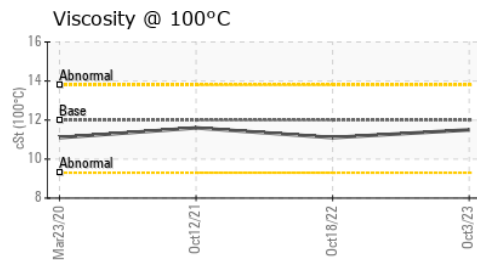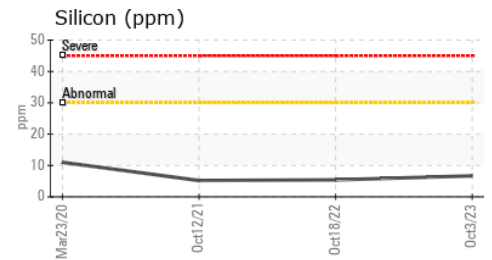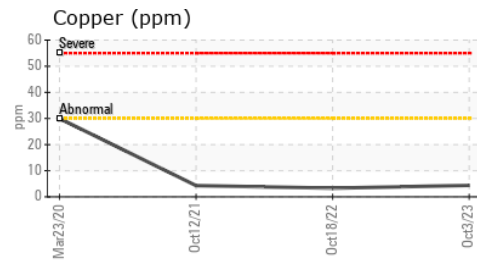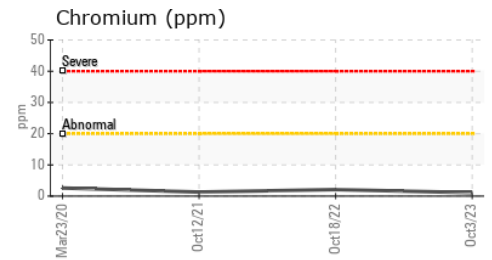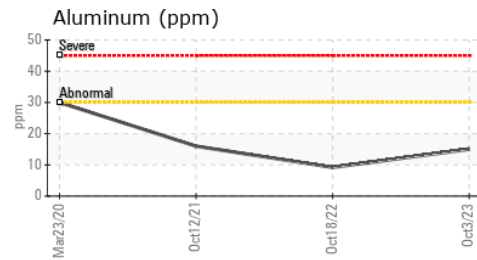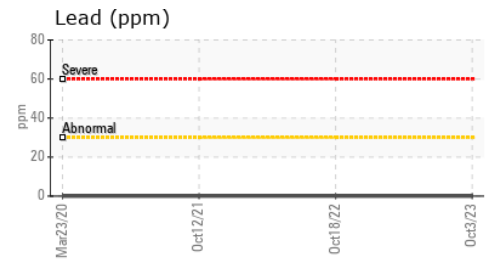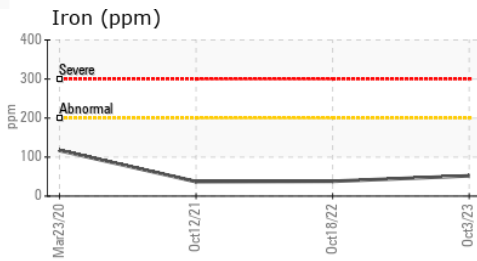

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0101952 **Received** : 17 Oct 2023  
**Lab Number** : 05981032 **Diagnosed** : 17 Oct 2023  
**Unique Number** : 10698327 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**MILLER TRUCK LEASING #112**  
 1504 MAINLINE DR  
 CINNAMINSON, NJ  
 US 08077  
 Contact: MIKE BOYER  
 mboyer@millertransgroup.com  
 T: (856)662-4264  
 F: (856)663-4898

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)