


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

 Machine Id
20-180 (S/N 5KKMALDRXJPJP6845)

 Component
Diesel Engine

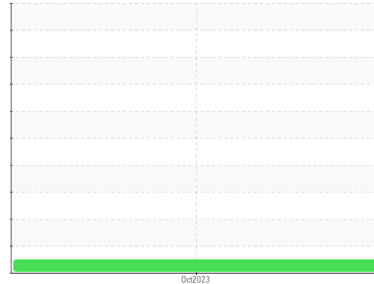 Fluid
DIESEL ENGINE OIL SAE 30 (--- GAL)

DIAGNOSIS
Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 30. Please confirm.

Wear

All component wear rates are normal.

Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION | | method | limit/base | current | history1 | history2 |
|--------------------|-------------|-------------|------------|--------------------|----------|----------|
| Sample Number | Client Info | | | PCA0104617 | --- | --- |
| Sample Date | Client Info | | | 10 Oct 2023 | --- | --- |
| Machine Age | hrs | Client Info | | 0 | --- | --- |
| Oil Age | hrs | Client Info | | 0 | --- | --- |
| Oil Changed | Client Info | | | N/A | --- | --- |
| Sample Status | | | | NORMAL | --- | --- |

| CONTAMINATION | | method | limit/base | current | history1 | history2 |
|---------------|-----------|--------|------------|------------|----------|----------|
| Glycol | WC Method | | | NEG | --- | --- |

| WEAR METALS | | method | limit/base | current | history1 | history2 |
|-------------|-----|-------------|------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m | >100 | 68 | --- | --- |
| Chromium | ppm | ASTM D5185m | >20 | 5 | --- | --- |
| Nickel | ppm | ASTM D5185m | >4 | 0 | --- | --- |
| Titanium | ppm | ASTM D5185m | | <1 | --- | --- |
| Silver | ppm | ASTM D5185m | >3 | 0 | --- | --- |
| Aluminum | ppm | ASTM D5185m | >20 | 6 | --- | --- |
| Lead | ppm | ASTM D5185m | >40 | 0 | --- | --- |
| Copper | ppm | ASTM D5185m | >330 | 4 | --- | --- |
| Tin | ppm | ASTM D5185m | >15 | <1 | --- | --- |
| Vanadium | ppm | ASTM D5185m | | 0 | --- | --- |
| Cadmium | ppm | ASTM D5185m | | 0 | --- | --- |




| ADDITIVES | | method | limit/base | current | history1 | history2 |
|------------|-----|-------------|------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m | 250 | 6 | --- | --- |
| Barium | ppm | ASTM D5185m | 10 | 0 | --- | --- |
| Molybdenum | ppm | ASTM D5185m | 100 | 56 | --- | --- |
| Manganese | ppm | ASTM D5185m | | <1 | --- | --- |
| Magnesium | ppm | ASTM D5185m | 450 | 783 | --- | --- |
| Calcium | ppm | ASTM D5185m | 3000 | 1084 | --- | --- |
| Phosphorus | ppm | ASTM D5185m | 1150 | 892 | --- | --- |
| Zinc | ppm | ASTM D5185m | 1350 | 1069 | --- | --- |
| Sulfur | ppm | ASTM D5185m | 4250 | 2549 | --- | --- |

| CONTAMINANTS | | method | limit/base | current | history1 | history2 |
|--------------|-----|-------------|------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185m | >25 | 10 | --- | --- |
| Sodium | ppm | ASTM D5185m | >75 | 5 | --- | --- |
| Potassium | ppm | ASTM D5185m | >20 | <1 | --- | --- |
| Fuel | % | ASTM D3524 | >5 | 0.3 | --- | --- |

| INFRA-RED | | method | limit/base | current | history1 | history2 |
|-----------|----------|-------------|------------|-------------|----------|----------|
| Soot % | % | *ASTM D7844 | >3 | 0.3 | --- | --- |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 7.6 | --- | --- |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 18.9 | --- | --- |

| FLUID DEGRADATION | | method | limit/base | current | history1 | history2 |
|-------------------|----------|-------------|------------|--------------|----------|----------|
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 14.9 | --- | --- |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 8.5 | 10.53 | --- | --- |









OIL ANALYSIS REPORT

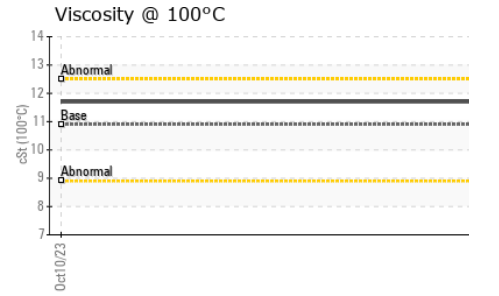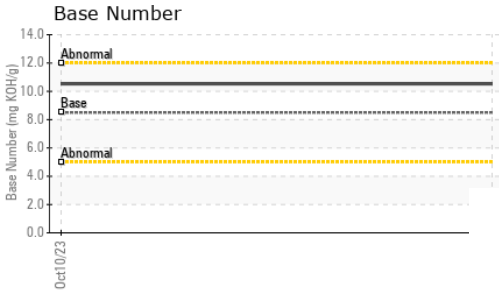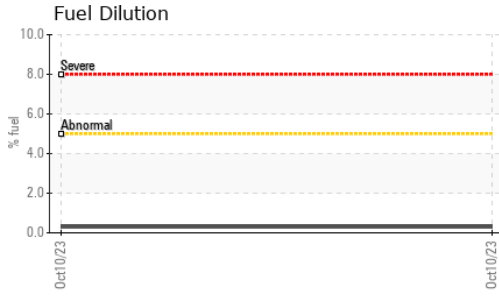

| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- |
| Precipitate | scalar | *Visual | NONE | NONE | --- |
| Silt | scalar | *Visual | NONE | NONE | --- |
| Debris | scalar | *Visual | NONE | NONE | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- |
| Odor | scalar | *Visual | NORML | NORML | --- |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | --- |
| Free Water | scalar | *Visual | | NEG | --- |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C | cSt | ASTM D445 | 10.9 | 11.7 | --- |

GRAPHS

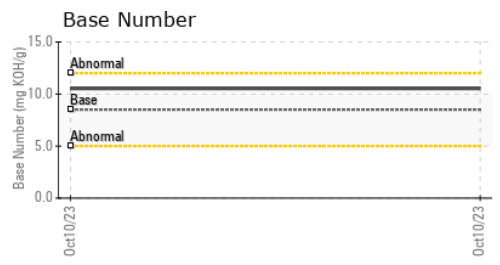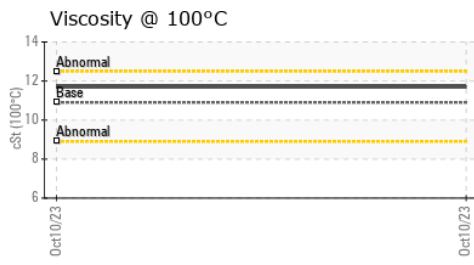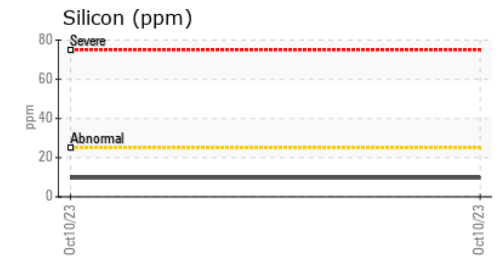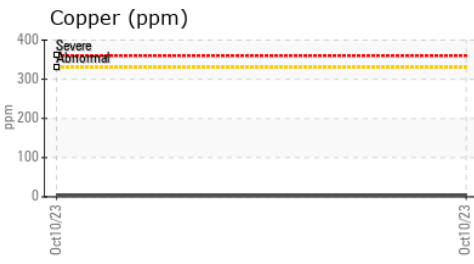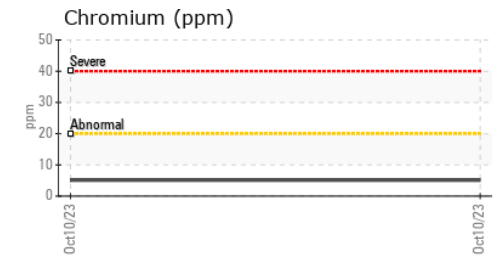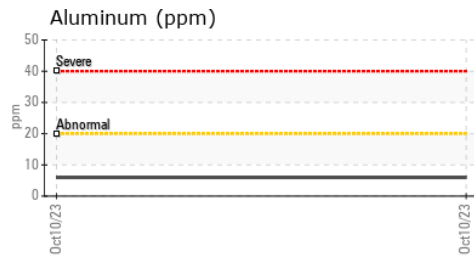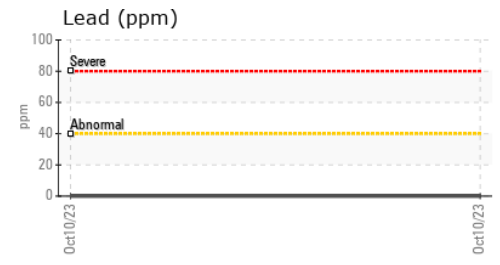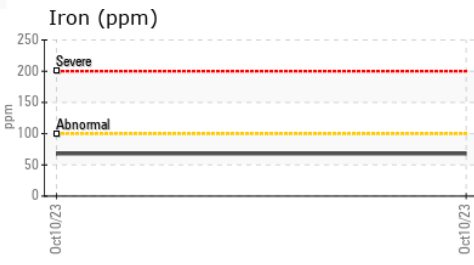

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0104617 **Received** : 17 Oct 2023
Lab Number : **05981316** **Diagnosed** : 18 Oct 2023
Unique Number : 10698611 **Diagnostician** : Wes Davis
Test Package : MOB 2 (Additional Tests: FuelDilution, PercentFuel)

SLT CONSTRUCTION
 5 MARION DR
 ARVER, MA
 US 02330
 Contact: MARC CARVALHO
 marcc@sltconstruction.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)