




# OIL ANALYSIS REPORT

Sample Rating Trend

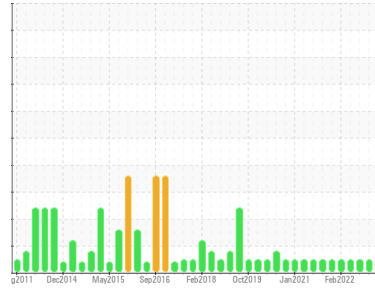

**NORMAL**



Machine Id  
**11060 FREIGHTLINER M2 106**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (38 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0094703</b>	GFL0094688	GFL0056498
Sample Date	Client Info	<b>17 Oct 2023</b>	02 Oct 2023	07 Nov 2022
Machine Age	hrs	<b>21248</b>	21221	19907
Oil Age	hrs	<b>0</b>	0	441
Oil Changed	Client Info	<b>Changed</b>	Not Changd	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >2.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>28</b>	18	43
Chromium	ppm ASTM D5185m >20	<b>1</b>	5	2
Nickel	ppm ASTM D5185m >4	<b>&lt;1</b>	<1	<1
Titanium	ppm ASTM D5185m	<b>0</b>	0	0
Silver	ppm ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>3</b>	4	2
Lead	ppm ASTM D5185m >40	<b>0</b>	<1	<1
Copper	ppm ASTM D5185m >330	<b>0</b>	1	1
Tin	ppm ASTM D5185m >15	<b>0</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>4</b>	8	12
Barium	ppm ASTM D5185m 0	<b>&lt;1</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>58</b>	56	63
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>939</b>	620	876
Calcium	ppm ASTM D5185m 1070	<b>1030</b>	1743	1229
Phosphorus	ppm ASTM D5185m 1150	<b>1012</b>	807	989
Zinc	ppm ASTM D5185m 1270	<b>1253</b>	1047	1251
Sulfur	ppm ASTM D5185m 2060	<b>2795</b>	2501	3317

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>11</b>	7	4
Sodium	ppm ASTM D5185m	<b>11</b>	7	50
Potassium	ppm ASTM D5185m >20	<b>4</b>	4	0

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>1.2</b>	0	1.5
Nitration	Abs/cm *ASTM D7624 >20	<b>12.1</b>	10.5	11.4
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>23.1</b>	20.5	24

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>21.6</b>	17.8	19.1
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>7.4</b>	5.5	9.9







# OIL ANALYSIS REPORT

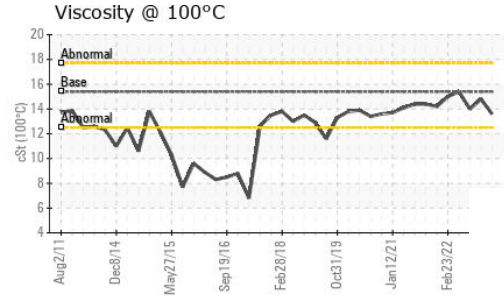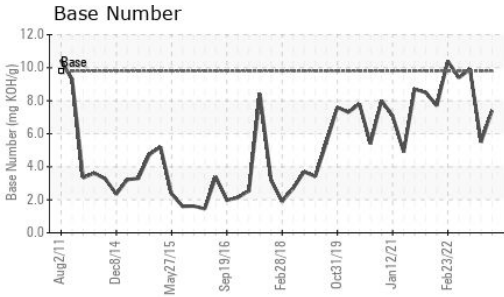

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.6</b>	14.8	14.0

## GRAPHS

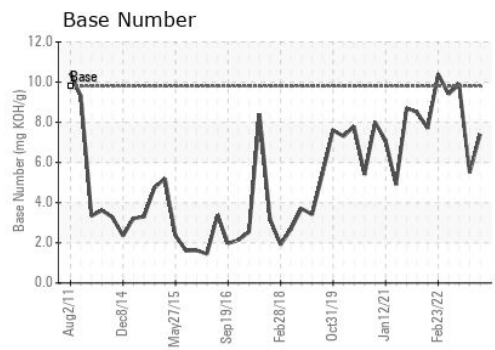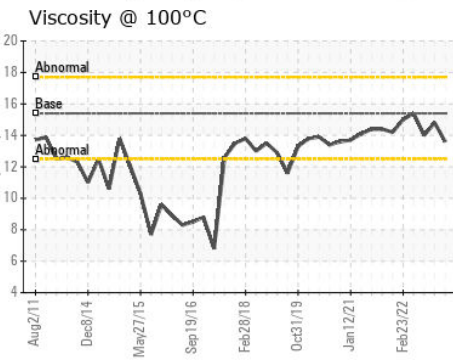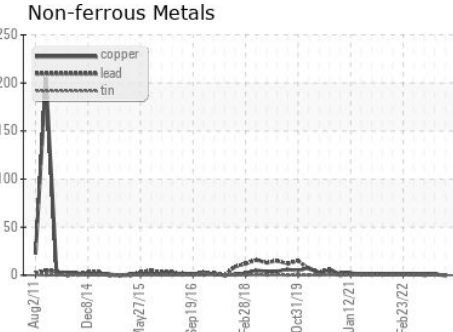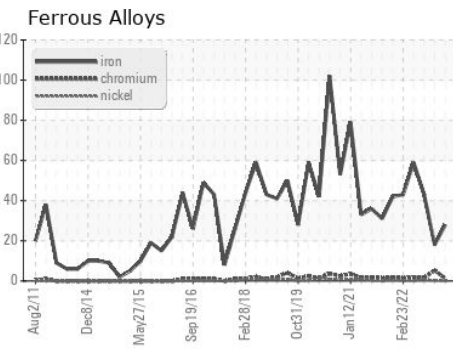

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0094703  
**Lab Number** : **05982208**  
**Unique Number** : 10699503  
**Test Package** : FLEET

**GFL Environmental - 001 - Raleigh(CNG)**  
 3741 Conquest Drive  
 Garner, NC  
 US 27529  
 Contact: Craig Johnson  
 craig.johnson@gflenv.com  
 T: (919)662-7100  
 F: (919)662-7130

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)