




# OIL ANALYSIS REPORT

Sample Rating Trend

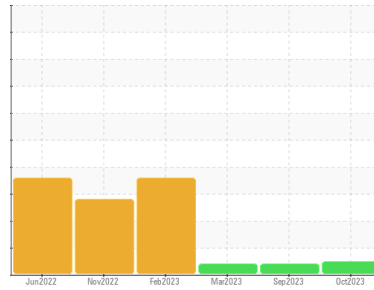

**NORMAL**



Machine Id  
**4561M**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0097710</b>	GFL0087263	GFL0072920
Sample Date	Client Info		<b>15 Oct 2023</b>	18 Sep 2023	08 Mar 2023
Machine Age	hrs	Client Info	<b>22485</b>	22285	21442
Oil Age	hrs	Client Info	<b>300</b>	843	250
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	ATTENTION	ATTENTION

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	0.7
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >90	<b>16</b>	24	6
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	0
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>4</b>	5	2
Lead	ppm	ASTM D5185m >40	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >330	<b>2</b>	8	0
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>8</b>	33	94
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>70</b>	46	21
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	4	<1
Magnesium	ppm	ASTM D5185m 1010	<b>1037</b>	529	286
Calcium	ppm	ASTM D5185m 1070	<b>1364</b>	1543	1689
Phosphorus	ppm	ASTM D5185m 1150	<b>1195</b>	760	854
Zinc	ppm	ASTM D5185m 1270	<b>1416</b>	959	1122
Sulfur	ppm	ASTM D5185m 2060	<b>4161</b>	2847	3260

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>9</b>	13	4
Sodium	ppm	ASTM D5185m	<b>19</b>	52	3
Potassium	ppm	ASTM D5185m >20	<b>2</b>	3	3

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	<b>0.3</b>	0.4	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.0</b>	7.8	7.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.8</b>	22.0	20.3

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.8</b>	19.8	15.8
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.8</b>	10.6	6.0







# OIL ANALYSIS REPORT

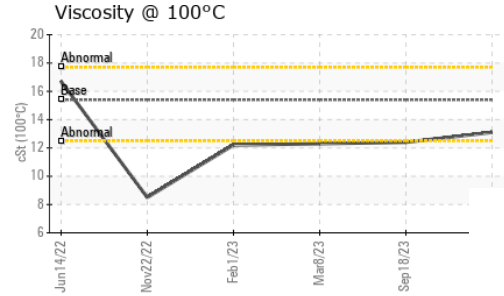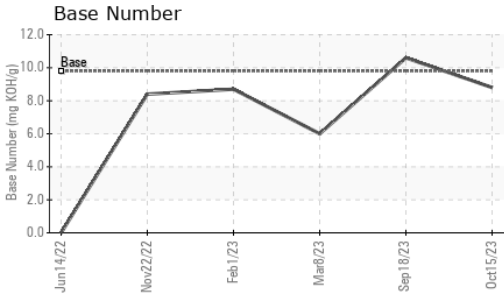

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.1</b>	▲ 12.4	▲ 12.3

## GRAPHS

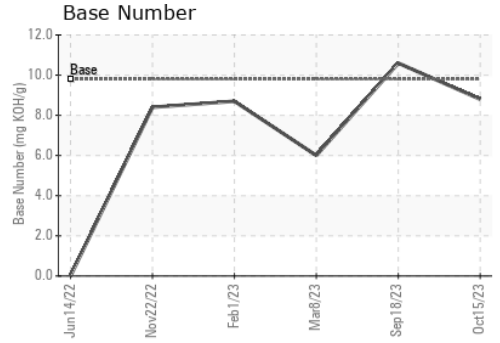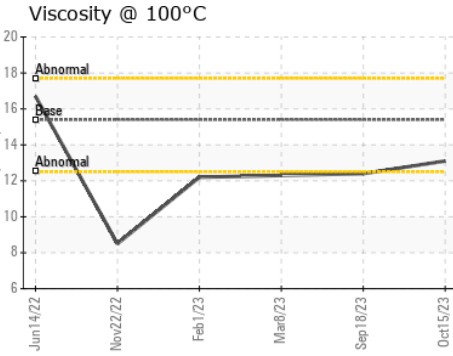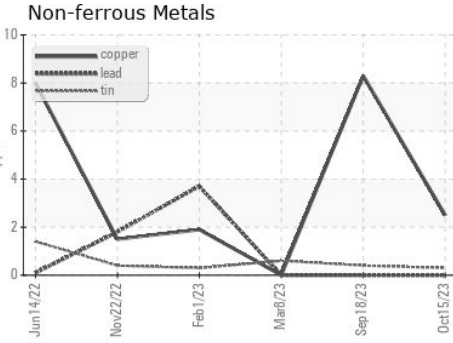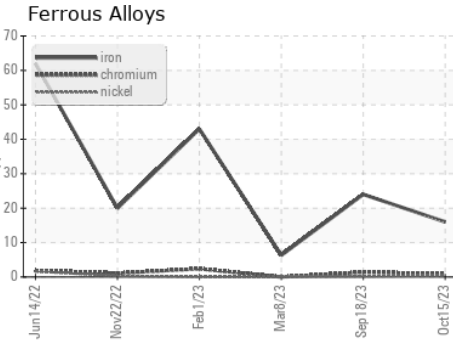

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0097710 **Received** : 19 Oct 2023  
**Lab Number** : **05983385** **Diagnosed** : 20 Oct 2023  
**Unique Number** : 10700680 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 405 - Arbor Hills**  
 7400 Napier Rd  
 NORTHVILLE, MI  
 US 48168  
 Contact: John Nahal  
 jnahal@gflenv.com  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)