




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**212003**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

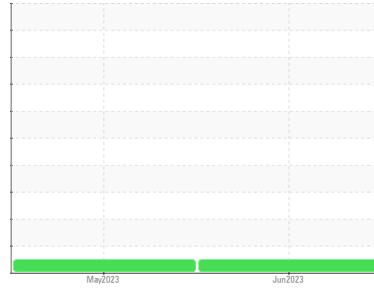

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0069810</b>	GFL0069878	---
Sample Date	Client Info		<b>16 Jun 2023</b>	01 May 2023	---
Machine Age	hrs	Client Info	<b>6440</b>	6023	---
Oil Age	hrs	Client Info	<b>600</b>	600	---
Oil Changed	Client Info		<b>Changed</b>	Changed	---
Sample Status			<b>NORMAL</b>	NORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Glycol	WC Method		<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>12</b>	4	---
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	0	---
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m	<b>0</b>	0	---
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >30	<b>1</b>	1	---
Lead	ppm	ASTM D5185m >30	<b>0</b>	0	---
Copper	ppm	ASTM D5185m >150	<b>0</b>	0	---
Tin	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>4</b>	5	---
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m 60	<b>57</b>	58	---
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m 1010	<b>936</b>	956	---
Calcium	ppm	ASTM D5185m 1070	<b>1012</b>	1031	---
Phosphorus	ppm	ASTM D5185m 1150	<b>1033</b>	1062	---
Zinc	ppm	ASTM D5185m 1270	<b>1259</b>	1289	---
Sulfur	ppm	ASTM D5185m 2060	<b>2989</b>	3093	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>3</b>	2	---
Sodium	ppm	ASTM D5185m	<b>0</b>	1	---
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	---

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.6</b>	0.1	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.1</b>	5.7	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.4</b>	17.5	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.1</b>	13.6	---
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.5</b>	8.5	---








# OIL ANALYSIS REPORT

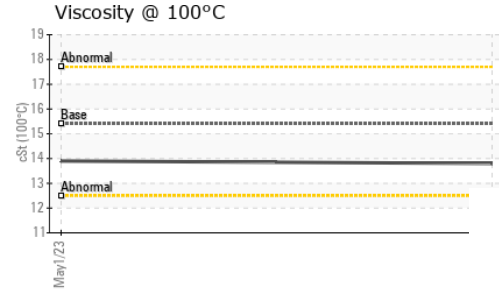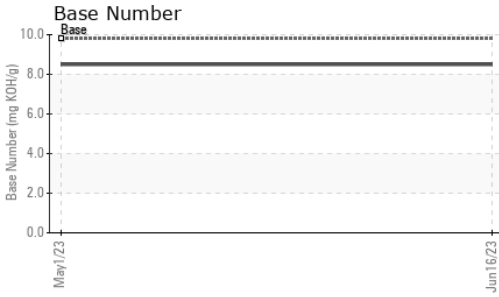

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.8</b>	13.9	---

## GRAPHS

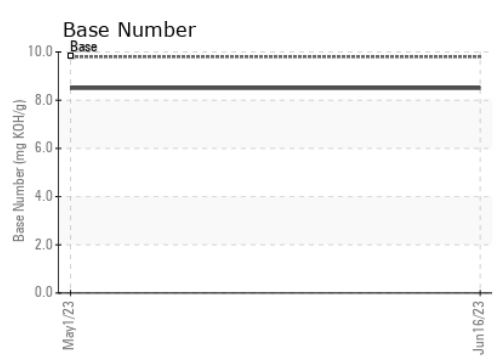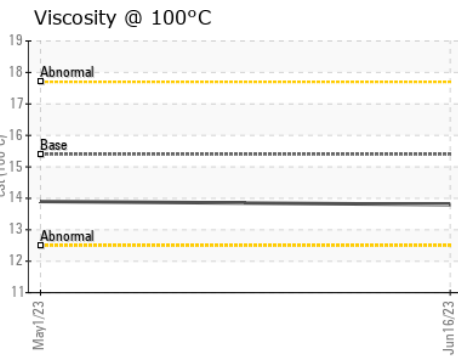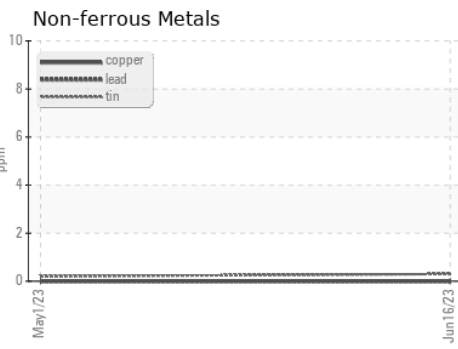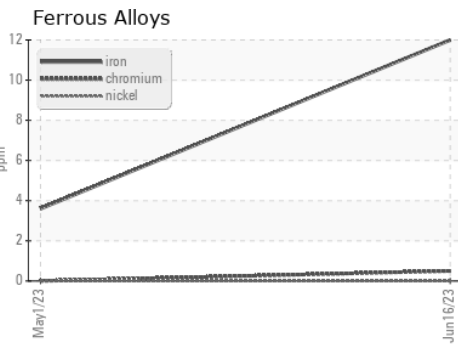

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0069810     **Received** : 20 Oct 2023  
**Lab Number** : **05984390**     **Diagnosed** : 20 Oct 2023  
**Unique Number** : 10701685     **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 418 - Metro/MI East**  
 22001 Hoover Dr  
 Warren, MI  
 US 48089  
 Contact: JIM HESS  
 jhess@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)