




# PROBLEM SUMMARY

Sample Rating Trend




FUEL



Machine Id  
**134M**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

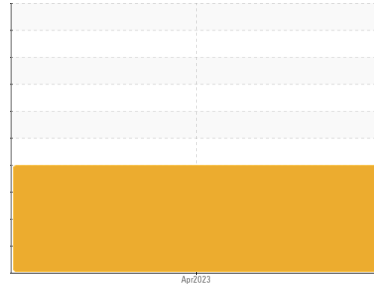

## COMPONENT CONDITION SUMMARY

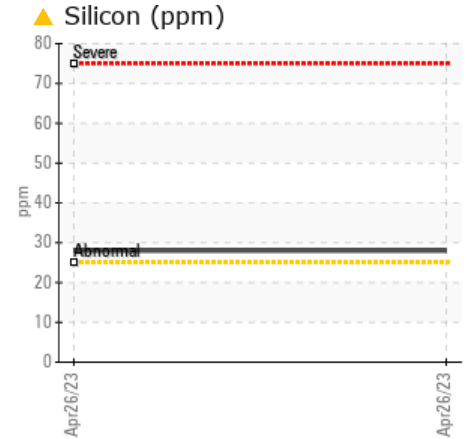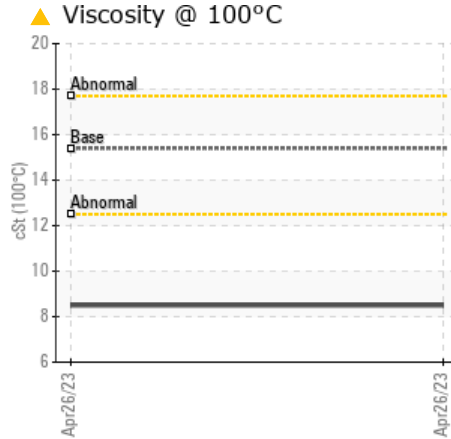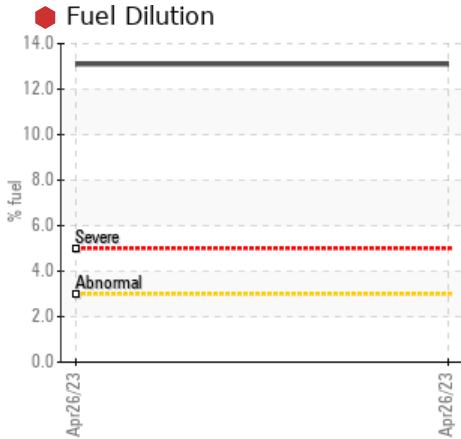

## RECOMMENDATION

We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

## PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	---	---
Silicon	ppm	ASTM D5185m	>25	▲ 28	---	---
Fuel	%	ASTM D3524	>3.0	● 13.1	---	---
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 8.5	---	---

Customer Id: GFL418  
Sample No.: GFL0069863  
Lab Number: 05984411  
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Jonathan Hester +1 919-379-4092 x4092  
[jhester@wearcheckusa.com](mailto:jhester@wearcheckusa.com)

To change component or sample information:  
Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Fuel/injector System	---	---	?	We advise that you check the fuel injection system.

## HISTORICAL DIAGNOSIS




# OIL ANALYSIS REPORT

Sample Rating Trend

FUEL



Machine Id  
**134M**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

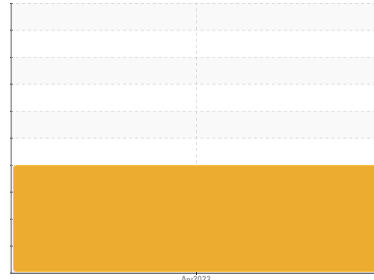

## DIAGNOSIS

### Recommendation

We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of fuel present in the oil. Elemental level of silicon (Si) above normal indicating ingress of seal material.

### Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0069863</b>	---	---
Sample Date	Client Info	<b>26 Apr 2023</b>	---	---
Machine Age	hrs	<b>23071</b>	---	---
Oil Age	hrs	<b>600</b>	---	---
Oil Changed	Client Info	<b>Changed</b>	---	---
Sample Status		<b>SEVERE</b>	---	---

## CONTAMINATION

method	limit/base	current	history1	history2
Glycol	WC Method	<b>NEG</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >120	<b>92</b>	---	---
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m >5	<b>3</b>	---	---
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m >2	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m >20	<b>5</b>	---	---
Lead	ppm	ASTM D5185m >40	<b>0</b>	---	---
Copper	ppm	ASTM D5185m >330	<b>8</b>	---	---
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 0	<b>16</b>	---	---
Barium	ppm	ASTM D5185m 0	<b>1</b>	---	---
Molybdenum	ppm	ASTM D5185m 60	<b>16</b>	---	---
Manganese	ppm	ASTM D5185m 0	<b>1</b>	---	---
Magnesium	ppm	ASTM D5185m 1010	<b>212</b>	---	---
Calcium	ppm	ASTM D5185m 1070	<b>338</b>	---	---
Phosphorus	ppm	ASTM D5185m 1150	<b>498</b>	---	---
Zinc	ppm	ASTM D5185m 1270	<b>418</b>	---	---
Sulfur	ppm	ASTM D5185m 2060	<b>5946</b>	---	---

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	<b>28</b>	---	---
Sodium	ppm	ASTM D5185m	<b>33</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>31</b>	---	---
Fuel	%	ASTM D3524 >3.0	<b>13.1</b>	---	---

## INFRA-RED





method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >4	<b>0.3</b>	---	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>5.5</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>24.3</b>	---	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>21.4</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.1</b>	---	---







# OIL ANALYSIS REPORT

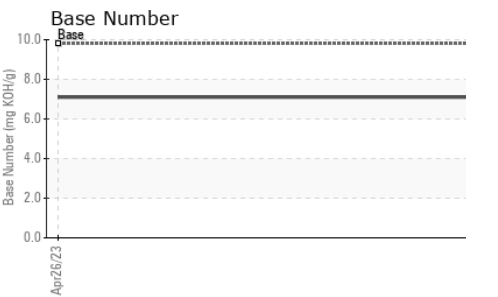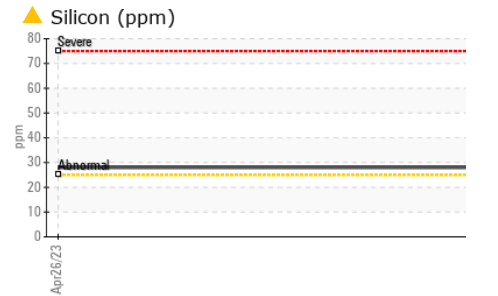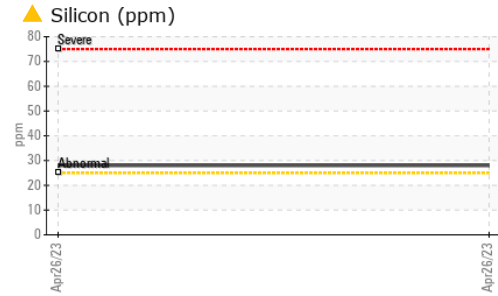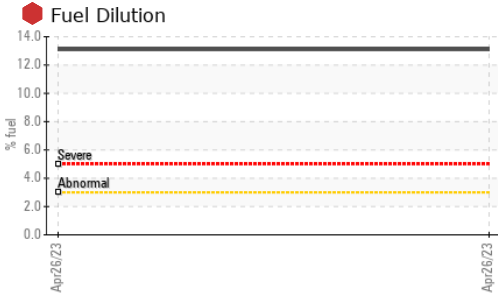

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4 ▲ 8.5	---	---

## GRAPHS

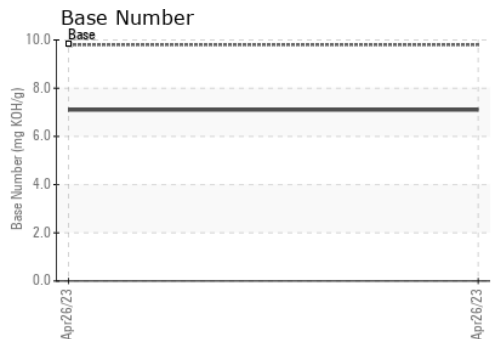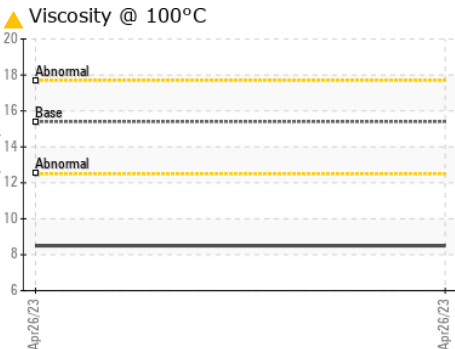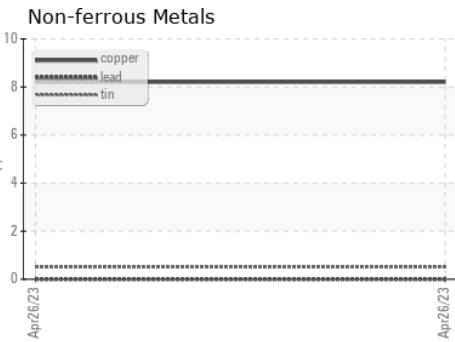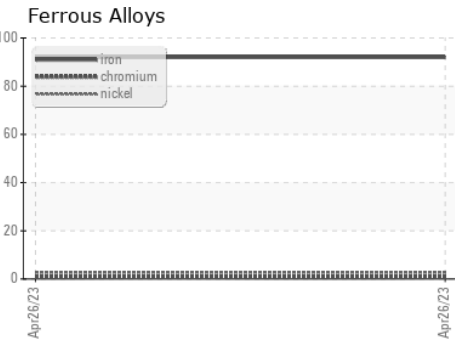

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0069863 **Received** : 20 Oct 2023  
**Lab Number** : 05984411 **Diagnosed** : 24 Oct 2023  
**Unique Number** : 10701706 **Diagnostician** : Jonathan Hester  
**Test Package** : FLEET ( Additional Tests: FuelDilution, PercentFuel )

**GFL Environmental - 418 - Metro/MI East**  
 22001 Hoover Dr  
 Warren, MI  
 US 48089  
 Contact: JIM HESS  
 jhess@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: