




PROBLEM SUMMARY


Sample Rating Trend

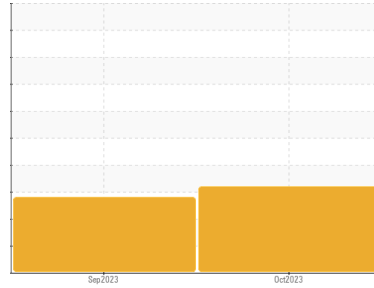


Machine Id
714065
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

COMPONENT CONDITION SUMMARY


▲ Viscosity @ 100°C

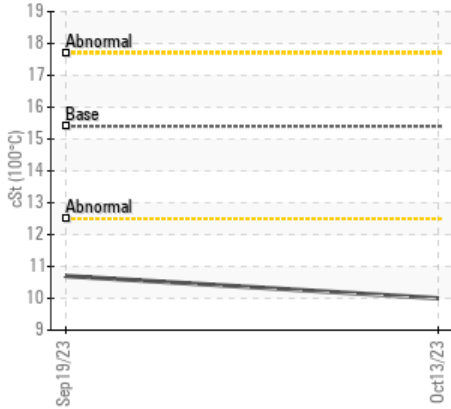

▲ Silicon (ppm)

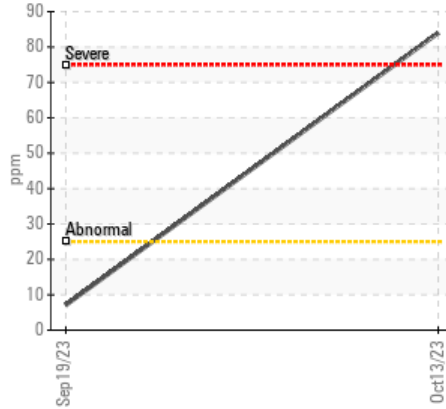

▲ Additives

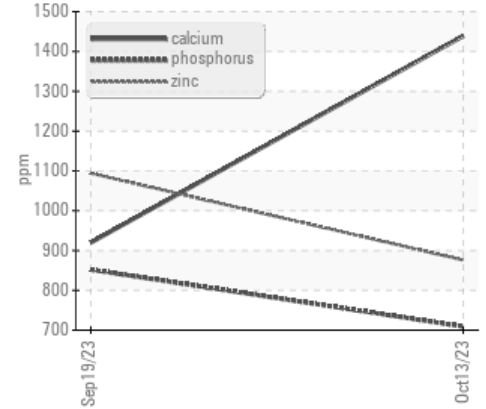

RECOMMENDATION

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Oil and filter change at the time of sampling has been noted. Confirm the source of the lubricant being utilized for top-up/fill. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	SEVERE	---
Boron	ppm	ASTM D5185m	0	▲ 187	0	---
Phosphorus	ppm	ASTM D5185m	1150	▲ 709	852	---
Zinc	ppm	ASTM D5185m	1270	▲ 876	1094	---
Silicon	ppm	ASTM D5185m	>25	▲ 84	7	---
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 10.0	10.7	---

Customer Id: GFL465
 Sample No.: GFL0096575
 Lab Number: 05984438
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Angela Borella +1 800-237-1369
angela.borella@wearcheckusa.com

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Dirt Access	---	---	?	We advise that you check the air filter, air induction system, and any areas where dirt may enter the component.
Check Fluid Source	---	---	?	Confirm the source of the lubricant being utilized for top-up/fill.

HISTORICAL DIAGNOSIS

19 Sep 2023 Diag: Wes Davis

FUEL



We advise that you check the fuel injection system. We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. Metal levels are typical for a new component breaking in. There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

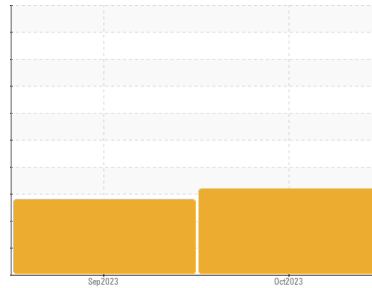

DIRT



Machine Id
714065
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

▲ Recommendation

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Oil and filter change at the time of sampling has been noted. Confirm the source of the lubricant being utilized for top-up/fill. We recommend an early resample to monitor this condition.

Wear

Metal levels are typical for a new component breaking in.

▲ Contamination

Fuel content negligible. There is a moderate concentration of dirt present in the oil.

▲ Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Viscosity of sample indicates oil is within SAE 30 range, advise investigate. This plus the additive levels indicates that this is not the same brand, or type of oil as reported. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0096575	GFL0027561	---
Sample Date	Client Info		13 Oct 2023	19 Sep 2023	---
Machine Age	hrs	Client Info	635	444	---
Oil Age	hrs	Client Info	600	600	---
Oil Changed	Client Info		Changed	Not Changd	---
Sample Status			ABNORMAL	SEVERE	---

CONTAMINATION

	method	limit/base	current	history1	history2
Glycol	WC Method		NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	41	27	---
Chromium	ppm	ASTM D5185m >20	<1	<1	---
Nickel	ppm	ASTM D5185m >5	7	0	---
Titanium	ppm	ASTM D5185m >2	<1	0	---
Silver	ppm	ASTM D5185m >2	<1	0	---
Aluminum	ppm	ASTM D5185m >20	16	2	---
Lead	ppm	ASTM D5185m >40	<1	0	---
Copper	ppm	ASTM D5185m >330	295	<1	---
Tin	ppm	ASTM D5185m >15	3	0	---
Vanadium	ppm	ASTM D5185m	<1	0	---
Cadmium	ppm	ASTM D5185m	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	▲ 187	0	---
Barium	ppm	ASTM D5185m 0	2	0	---
Molybdenum	ppm	ASTM D5185m 60	123	47	---
Manganese	ppm	ASTM D5185m 0	4	0	---
Magnesium	ppm	ASTM D5185m 1010	708	774	---
Calcium	ppm	ASTM D5185m 1070	1439	920	---
Phosphorus	ppm	ASTM D5185m 1150	▲ 709	852	---
Zinc	ppm	ASTM D5185m 1270	▲ 876	1094	---
Sulfur	ppm	ASTM D5185m 2060	2526	2845	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	▲ 84	7	---
Sodium	ppm	ASTM D5185m	3	9	---
Potassium	ppm	ASTM D5185m >20	33	7	---
Fuel	%	ASTM D3524 >3.0	0.3	9.1	---

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	0.4	0.6	---
Nitration	Abs/cm	*ASTM D7624 >20	9.9	10.0	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	23.2	20.3	---


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	20.9	16.8	---
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	8.1	7.5	---




OIL ANALYSIS REPORT


▲ Silicon (ppm)

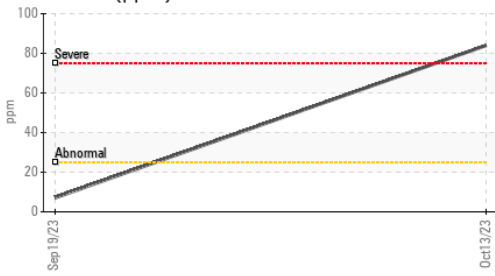


▲ Additives

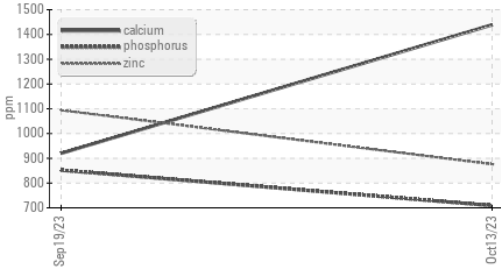


Fuel Dilution

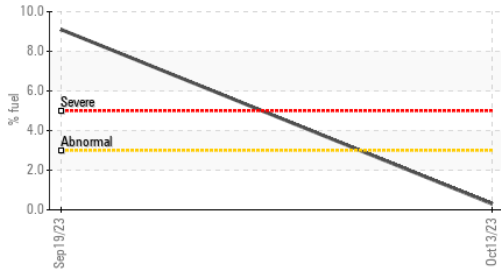

Fuel Dilution

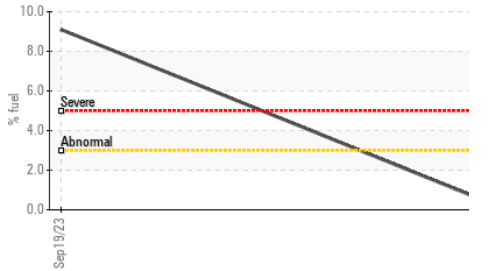

Base Number

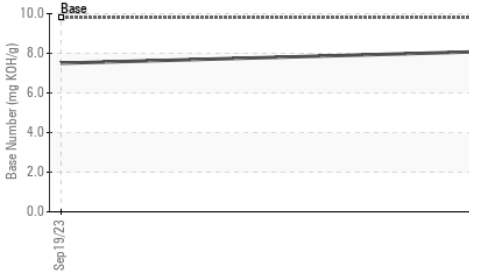


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 10.0	◆ 10.7

GRAPHS


Ferrous Alloys

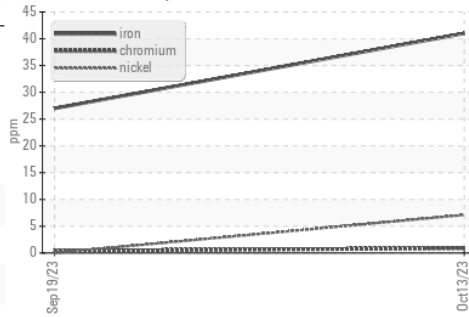


Non-ferrous Metals

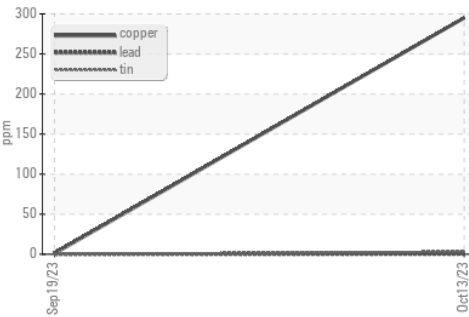

▲ Viscosity @ 100°C

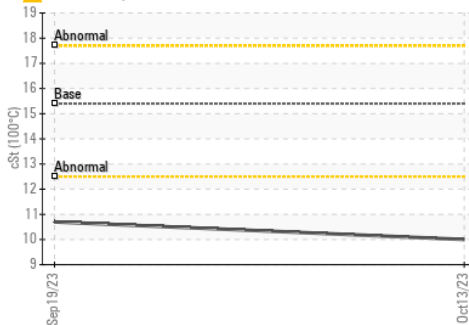

Base Number

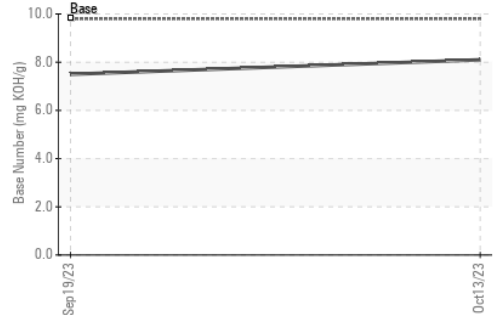

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0096575 Received : 20 Oct 2023
 Lab Number : 05984438 Diagnosed : 23 Oct 2023
 Unique Number : 10701733 Diagnostician : Angela Borella
 Test Package : FLEET (Additional Tests: PercentFuel)

GFL Environmental - 465 - Pontiac
 888 Baldwin
 Pontiac, MI
 US 48340

Contact: Ricky Matthews
 rickymathews@gflenv.com
 T: (586)825-9514

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: