


# OIL ANALYSIS REPORT

## Sample Rating Trend

**NORMAL**

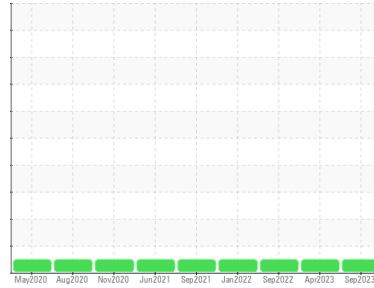

Machine Id  
**552**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON HP 15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0082807</b>	PCA0069549	PCA0069224
Sample Date	Client Info			<b>26 Sep 2023</b>	13 Apr 2023	19 Sep 2022
Machine Age	hrs	Client Info		<b>0</b>	9783	6332
Oil Age	hrs	Client Info		<b>0</b>	6252	6332
Oil Changed	Client Info			<b>Not Chngd</b>	Not Chngd	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>17</b>	26	17
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>20	<b>5</b>	18	8
Lead	ppm	ASTM D5185m	>40	<b>2</b>	6	1
Copper	ppm	ASTM D5185m	>330	<b>2</b>	3	1
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185m		<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>3</b>	13	5
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>65</b>	72	61
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>947</b>	1007	924
Calcium	ppm	ASTM D5185m		<b>1114</b>	1185	1102
Phosphorus	ppm	ASTM D5185m		<b>1073</b>	1048	989
Zinc	ppm	ASTM D5185m		<b>1264</b>	1277	1215
Sulfur	ppm	ASTM D5185m		<b>3633</b>	3386	3452

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>6</b>	8	8
Sodium	ppm	ASTM D5185m		<b>0</b>	3	2
Potassium	ppm	ASTM D5185m	>20	<b>15</b>	48	18

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.4	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.5</b>	8.7	9.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.8</b>	20.6	22.0

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.4</b>	16.8	18.4
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>7.6</b>	8.1	8.6





# OIL ANALYSIS REPORT

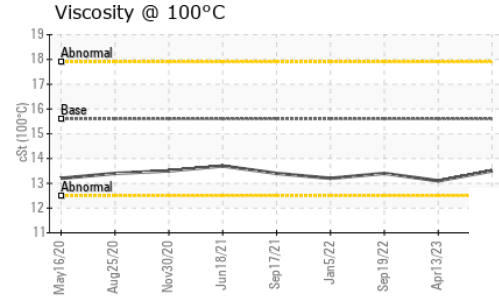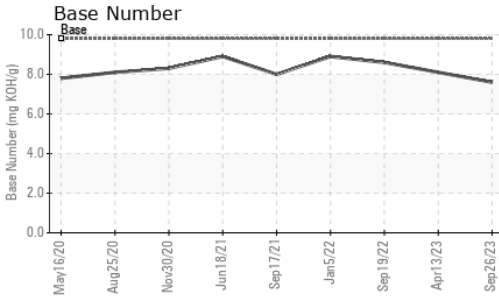

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.6	<b>13.5</b>	13.1	13.4

## GRAPHS

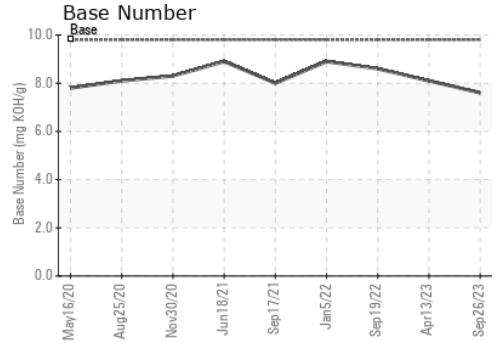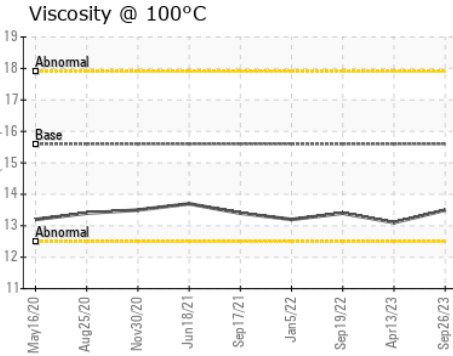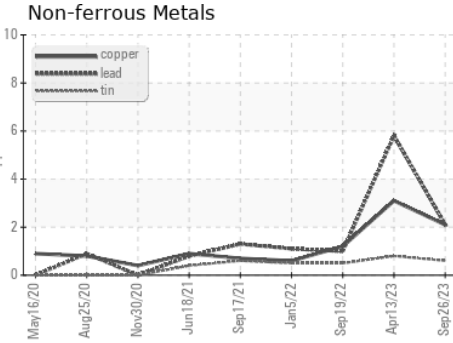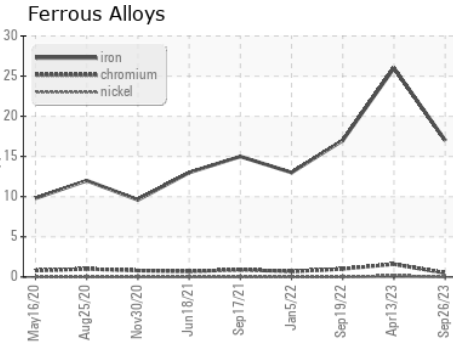

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0082807 **Received** : 23 Oct 2023  
**Lab Number** : **05986193** **Diagnosed** : 24 Oct 2023  
**Unique Number** : 10708855 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**AVR - APPLE VALLEY READY MIX**  
 14698 GALAXY AVE  
 APPLE VALLEY, MN  
 US 55124  
 Contact: senia zimmer  
 avrconcrete.senia@gmail.com  
 T: (952)953-2992  
 F: (952)953-2994

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)