

PROBLEM SUMMARY

Sample Rating Trend VIS DEBRIS

WOLVO 26511 (S/N 4V4NC9EH9HN991816)

Rear Differential Fluid VOLVO (--- QTS)

COMPONENT CONDITION SUMMARY

No relevant graphs to display

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

PROBLEMATIC TEST RESULTS							
Sample Status				ABNORMAL			
Debris	scalar	*Visual	NONE	▲ MODER			

Customer Id: PERPRIPCA Sample No.: PCA0107817 Lab Number: 05987003 Test Package: FLEET

To manage this report scan the QR code

To discuss the diagnosis or test data: Sean Felton +1 919-379-4092 sfelton@wearcheckusa.com

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS							
Action	Status	Date	Done By	Description			
Information Required			?	Please specify the brand, type, and viscosity of the oil on your next sample.			

HISTORICAL DIAGNOSIS



OIL ANALYSIS REPORT

Sample Rating Trend

VIS DEBRIS



VOLVO 26511 (S/N 4V4NC9EH9HN991816)

Component

Rear Differential

VOLVO (--- QTS)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

Moderate concentration of visible dirt/debris present in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

	,					
				Oct2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0107817		
Sample Date		Client Info		09 Oct 2023		
Machine Age	mls	Client Info		0		
Oil Age	mls	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
WEAR METALS	3	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	321		
Chromium	ppm	ASTM D5185m	>10	2		
Nickel	ppm	ASTM D5185m	>10	9		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>25	2		
Lead	ppm	ASTM D5185m	>25	0		
Copper	ppm	ASTM D5185m	>100	4		
Tin	ppm	ASTM D5185m	>10	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		249		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		<1		
Manganese	ppm	ASTM D5185m		8		
Magnesium	ppm	ASTM D5185m		1		
Calcium	ppm	ASTM D5185m		12		
Phosphorus	ppm	ASTM D5185m		1515		
Zinc	ppm	ASTM D5185m		14		
Sulfur	ppm	ASTM D5185m		27744		
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	66		
Sodium	ppm	ASTM D5185m		7		
Potassium	ppm	ASTM D5185m	>20	9		
VISUAL		method	limit/base	current	history1	history2

Silicon	ppm	ASTM D5185m	>75	66		
Sodium	ppm	ASTM D5185m		7		
Potassium	ppm	ASTM D5185m	>20	9		
VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE		
Yellow Metal	scalar	*Visual	NONE	NONE		
Precipitate	scalar	*Visual	NONE	NONE		
Silt	scalar	*Visual	NONE	NONE		
Debris	scalar	*Visual	NONE	▲ MODER		
Sand/Dirt	scalar	*Visual	NONE	NONE		
Appearance	scalar	*Visual	NORML	NORML		
Odor	scalar	*Visual	NORML	NORML		
Emulsified Water	scalar	*Visual	>.2	NEG		
Free Water	scalar	*Visual		NEG		

limit/base

Visc @ 40°C

FLUID PROPERTIES

cSt

method ASTM D445

1


current


history1


history2




OIL ANALYSIS REPORT

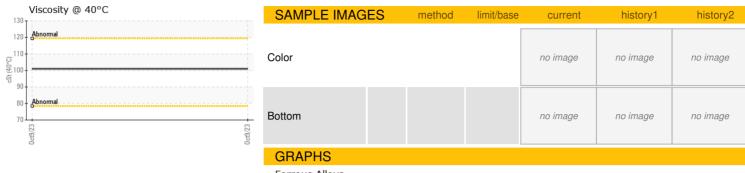



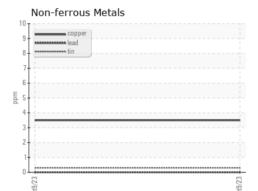

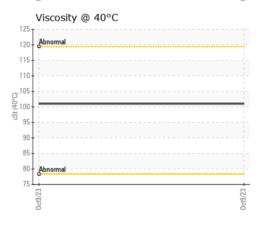



Certificate L2367

Laboratory Sample No.

Lab Number Unique Number : 10709665 Test Package : FLEET

: PCA0107817 : 05987003

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 23 Oct 2023 Diagnosed Diagnostician : Sean Felton

: 25 Oct 2023

PERDUE FARMS - PRINCE GEORGE

6012 HARDWARE DR PRINCE GEORGE, VA US 23875

Contact: MICHAEL DAVIS

MICHAELP.DAVIS@PERDUE.COM T:

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: