

OIL ANALYSIS REPORT

Sample Rating Trend





Component

Transmission (Auto)

PETRO CANADA DuraDrive HD Synthetic 668 (10 QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition


The condition of the oil is acceptable for the time in service.

| SAMPLE INFORM | VIATION | method | limit/base | current | history1 | history2 |
|------------------|---------|-------------|------------|-------------|------------------|-------------|
| Sample Number | | Client Info | | GFL0097863 | GFL0094373 | GFL0083236 |
| Sample Date | | Client Info | | 10 Oct 2023 | 19 Sep 2023 | 05 Jun 2023 |
| Machine Age | hrs | Client Info | | 967 | 830 | 13119 |
| Oil Age | hrs | Client Info | | 137 | 830 | 609 |
| Oil Changed | | Client Info | | Not Changd | Not Changd | Not Changd |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |
| WEAR METALS | S | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >300 | 6 | 8 | 7 |
| Chromium | ppm | ASTM D5185m | >2 | <1 | 0 | 0 |
| Nickel | ppm | ASTM D5185m | >4 | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | >3 | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | >5 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >70 | 2 | 1 | <1 |
| Lead | ppm | ASTM D5185m | >85 | <1 | 0 | <1 |
| Copper | ppm | ASTM D5185m | >90 | 1 | 1 | 1 |
| Tin | ppm | ASTM D5185m | >10 | <1 | 0 | <1 |
| Vanadium | ppm | ASTM D5185m | | 0 | <1 | 0 |
| Cadmium | ppm | ASTM D5185m | | 0 | <1 | 0 |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 78 | 70 | 80 |
| Barium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | | <1 | 0 | <1 |
| Manganese | ppm | ASTM D5185m | | 0 | <1 | 0 |
| Magnesium | ppm | ASTM D5185m | | 2 | 0 | 3 |
| Calcium | ppm | ASTM D5185m | | 123 | 126 | 132 |
| Phosphorus | ppm | ASTM D5185m | | 214 | 250 | 216 |
| Zinc | ppm | ASTM D5185m | | 7 | 10 | 15 |
| Sulfur | ppm | ASTM D5185m | | 1713 | 1854 | 1843 |
| CONTAMINAN | TS | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >20 | 3 | 3 | 3 |
| Sodium | ppm | ASTM D5185m | | 0 | 1 | 0 |
| Potassium | ppm | ASTM D5185m | >20 | 1 | 2 | 2 |
| VISUAL | | method | limit/base | current | history1 | history2 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG | NEG |
| FLUID PROPE | RTIES | method | limit/base | current | history1 | history2 |
| Visc @ 40°C | cSt | ASTM D445 | 34 | 33.8 | 34.1 | 33.8 |
| 5:03:00) Rev: 1 | | | | : | Submitted By: JC | SHUA TINKER |


Report Id: GFL010 [WUSCAR] 05987041 (Generated: 10/25/2023 15:03:00) Rev: 1



OIL ANALYSIS REPORT

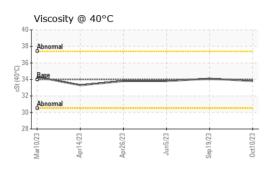

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|----------------|--------|------------|----------|----------|----------|
| Color | | | no image | no image | no image |
| Bottom | | | no image | no image | no image |
| GRAPHS | | | | | |
| Ferrous Alloys | | | | | |

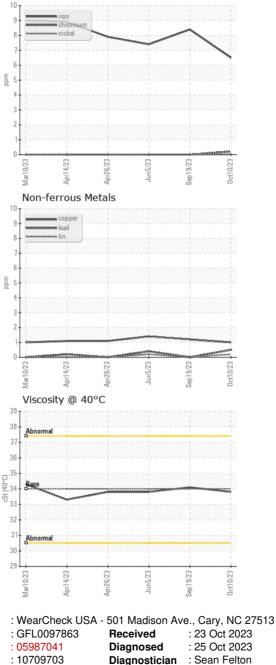

GFL Environmental - 010 - Stockbridge 1280 Rum Creek Parkway Stockbridge, GA US 30281 Contact: TECHNICIAN ACCOUNT wcgfldemo@gmail.com T: 106:2012) F:



 Unique Number
 : 10709703
 Diagnostician
 : Sean Felton

 Certificate 12367
 Test Package
 : FLEET
 Control

 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Laboratory

Sample No.

Lab Number

Page 2 of 2