


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**KEMP QUARRIES / KEMP STONE - FAIRLAND [66576]**  
Machine Id  
**OHT108**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

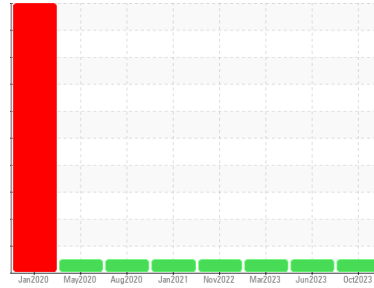

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: PM-3 sampled fluid and changed filters and fluid )

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0084702</b>	PCA0086376	PCA0086031
Sample Date	Client Info		<b>12 Oct 2023</b>	27 Jun 2023	22 Mar 2023
Machine Age	hrs	Client Info	<b>23086</b>	22548	22088
Oil Age	hrs	Client Info	<b>23086</b>	22548	22088
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>47</b>	54	42
Chromium	ppm	ASTM D5185m >6	<b>2</b>	2	2
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >30	<b>2</b>	<1	4
Lead	ppm	ASTM D5185m >10	<b>2</b>	8	3
Copper	ppm	ASTM D5185m >150	<b>9</b>	11	9
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>&lt;1</b>	2	33
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185m 60	<b>45</b>	60	57
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>706</b>	1010	823
Calcium	ppm	ASTM D5185m 1070	<b>1700</b>	1251	1266
Phosphorus	ppm	ASTM D5185m 1150	<b>1002</b>	1072	1025
Zinc	ppm	ASTM D5185m 1270	<b>1246</b>	1366	1233
Sulfur	ppm	ASTM D5185m 2060	<b>3043</b>	3828	3083

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>9</b>	9	11
Sodium	ppm	ASTM D5185m	<b>3</b>	3	0
Potassium	ppm	ASTM D5185m >20	<b>4</b>	1	3



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>1.3</b>	1.3	1.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.5</b>	10.0	11.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.1</b>	24.0	24.2

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.1</b>	19.7	19.0
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.3</b>	6.7	7.3










# OIL ANALYSIS REPORT

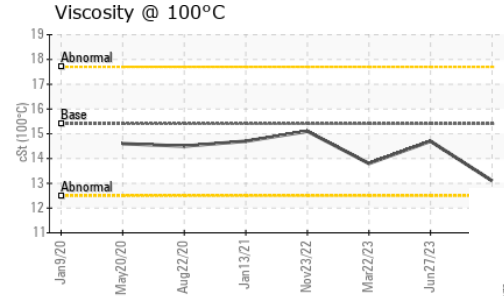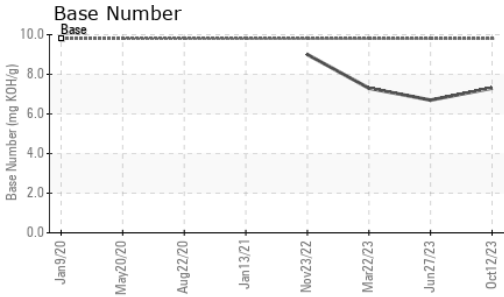

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.1</b>	14.7	13.8

## GRAPHS

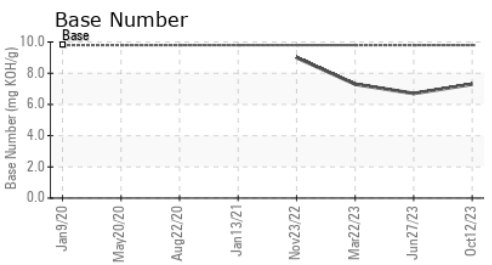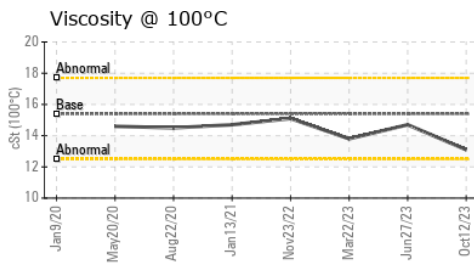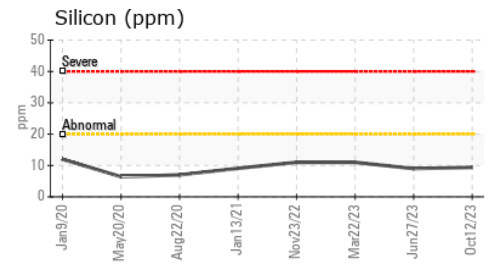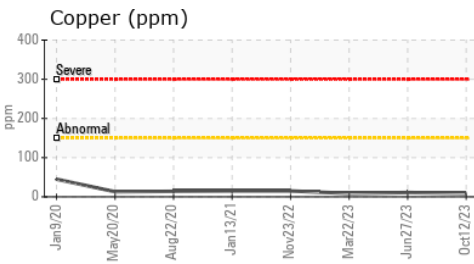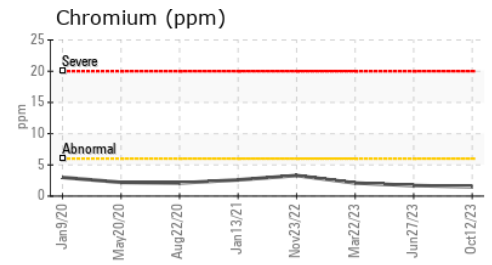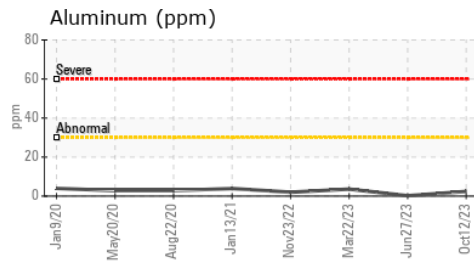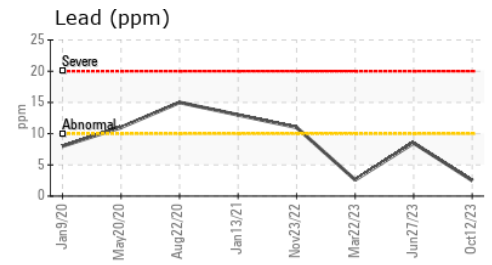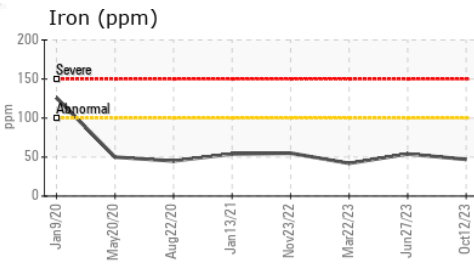

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0084702 **Received** : 23 Oct 2023  
**Lab Number** : 05987156 **Diagnosed** : 25 Oct 2023  
**Unique Number** : 10709818 **Diagnostician** : Don Baldrige  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**Kemp Quarries - Kemp Stone - Fairland**  
 18350 S 590 Rd  
 Fairland, OK  
 US 74343  
 Contact:  
 fairland@kempstone.com  
 T:  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)