


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

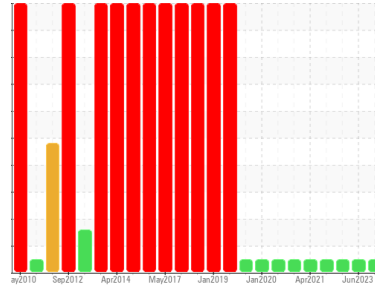

Area
KEMP QUARRIES / MUSKOGEE SAND [65225]
Machine Id
WL015
Component
Rear Differential
Fluid
PETRO CANADA PRODURO TO-4 SAE 50 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. (Customer Sample Comment: PM-2 sampled fluid)

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0087050	PCA0087113	PCA0070544
Sample Date	Client Info		25 Oct 2023	03 Jun 2023	16 Feb 2023
Machine Age	hrs	Client Info	2234	1895	1210
Oil Age	hrs	Client Info	2234	685	2000
Oil Changed	Client Info		N/A	Not Changd	Changed
Sample Status			NORMAL	NORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	84	51	134
Chromium	ppm	ASTM D5185m >3	<1	<1	<1
Nickel	ppm	ASTM D5185m >3	<1	0	<1
Titanium	ppm	ASTM D5185m >2	<1	<1	<1
Silver	ppm	ASTM D5185m >2	0	0	<1
Aluminum	ppm	ASTM D5185m >30	1	2	5
Lead	ppm	ASTM D5185m >13	<1	<1	2
Copper	ppm	ASTM D5185m >103	10	7	11
Tin	ppm	ASTM D5185m >5	<1	0	<1
Antimony	ppm	ASTM D5185m >5	---	---	---
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	1	0	6
Barium	ppm	ASTM D5185m 0	20	0	0
Molybdenum	ppm	ASTM D5185m 0	1	<1	4
Manganese	ppm	ASTM D5185m 0	1	<1	2
Magnesium	ppm	ASTM D5185m 9	17	17	45
Calcium	ppm	ASTM D5185m 3114	2847	2965	2836
Phosphorus	ppm	ASTM D5185m 1099	891	878	985
Zinc	ppm	ASTM D5185m 1245	1055	1059	1181
Sulfur	ppm	ASTM D5185m 7086	6956	5609	14350


CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >100	18	15	26
Sodium	ppm	ASTM D5185m	1	0	4
Potassium	ppm	ASTM D5185m >20	<1	<1	1

VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual NONE	NONE	NONE	NONE
Silt	scalar	*Visual NONE	NONE	NONE	NONE
Debris	scalar	*Visual NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	NONE
Appearance	scalar	*Visual NORML	NORML	NORML	NORML
Odor	scalar	*Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual >.2	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG









OIL ANALYSIS REPORT

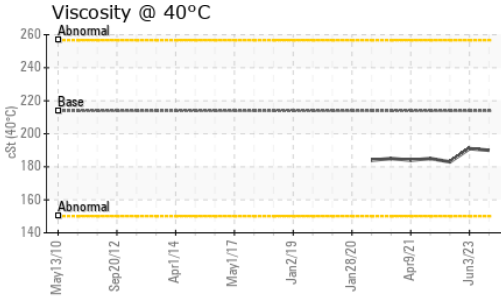

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	213.9	190	191	183

SAMPLE IMAGES		method	limit/base	current	history1	history2
Color				no image	no image	no image
Bottom				no image	no image	no image

GRAPHS

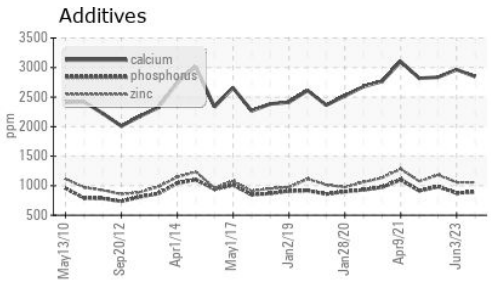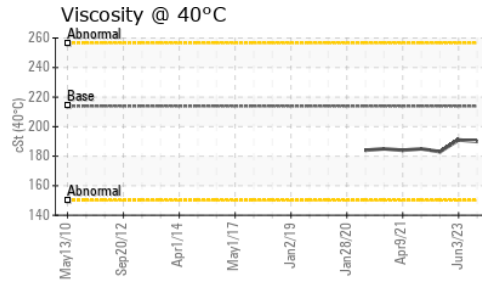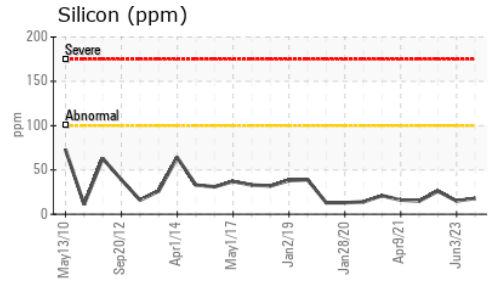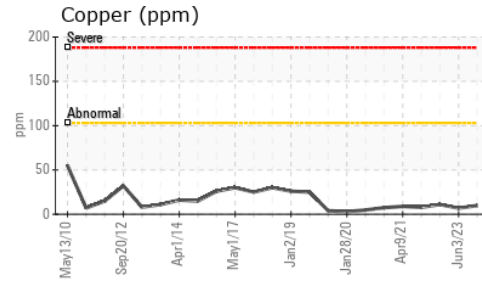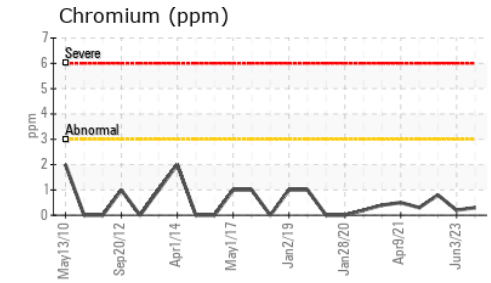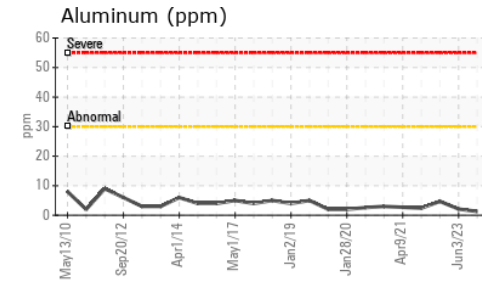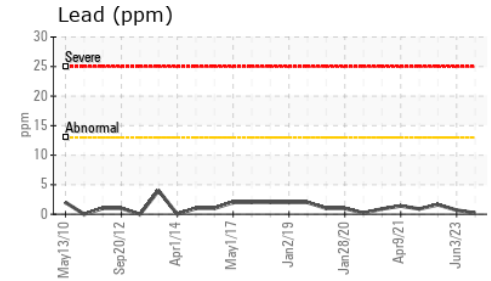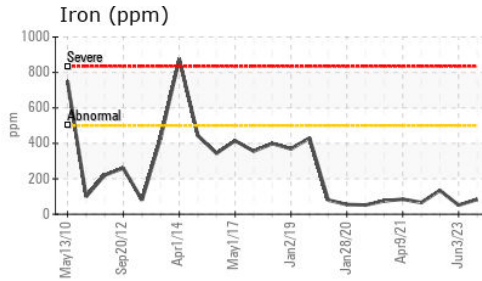

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0087050 **Received** : 30 Oct 2023
Lab Number : 05993863 **Diagnosed** : 01 Nov 2023
Unique Number : 10722223 **Diagnostician** : Sean Felton
Test Package : MOB 1

Kemp Quarries - Muskogee Sand
 3395 W 50th St N
 Porter, OK
 US 74454
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

muskogee@muskogeessand.com

T:

F: