


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

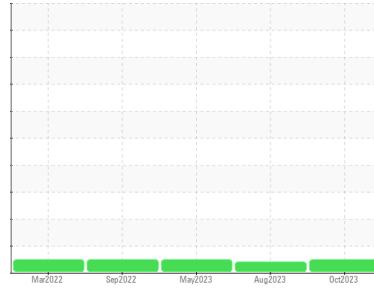

Area  
**KEMP QUARRIES / PRYOR STONE [66577]**  
 Machine Id  
**TTH034**  
 Component  
**Hydraulic System**  
 Fluid  
**PETRO CANADA HYDREX AW 68 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: PM-3 changed filters )

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0087005</b>	PCA0084291	PCA0084164
Sample Date	Client Info		<b>23 Oct 2023</b>	04 Aug 2023	10 May 2023
Machine Age	hrs	Client Info	<b>6019</b>	5598	5028
Oil Age	hrs	Client Info	<b>6019</b>	5028	0
Oil Changed		Client Info	<b>N/A</b>	Not Changd	Not Changd
Sample Status			<b>NORMAL</b>	ABNORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<b>4</b>	2	2
Chromium	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m >10	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >10	<b>&lt;1</b>	<1	2
Lead	ppm	ASTM D5185m >10	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >75	<b>9</b>	8	6
Tin	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>4</b>	1	<1
Barium	ppm	ASTM D5185m 0	<b>19</b>	0	0
Molybdenum	ppm	ASTM D5185m 0	<b>2</b>	2	1
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	0
Magnesium	ppm	ASTM D5185m 0	<b>14</b>	14	0
Calcium	ppm	ASTM D5185m 50	<b>97</b>	101	124
Phosphorus	ppm	ASTM D5185m 330	<b>403</b>	377	322
Zinc	ppm	ASTM D5185m 430	<b>479</b>	458	390
Sulfur	ppm	ASTM D5185m 760	<b>1446</b>	1154	690

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>3</b>	1	2
Sodium	ppm	ASTM D5185m	<b>3</b>	<1	<1
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	0


## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>NONE</b>	▲ MODER	NONE
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >0.1	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG

## FLUID PROPERTIES









	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 67.4	<b>63.8</b>	64.4	64.4

# OIL ANALYSIS REPORT

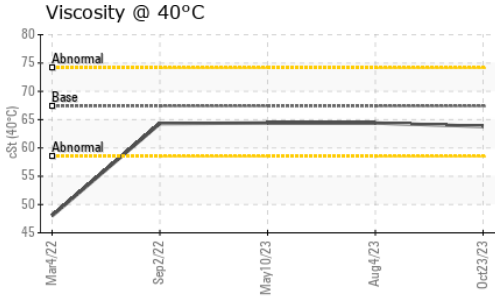

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

## GRAPHS

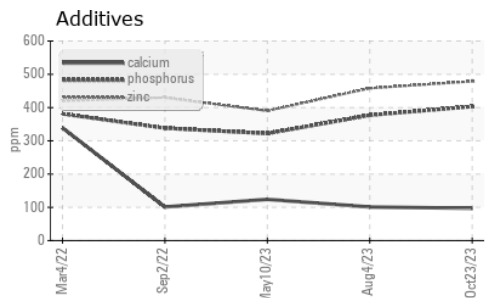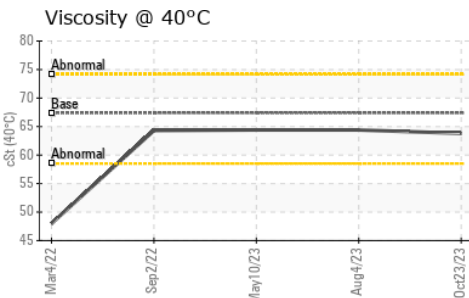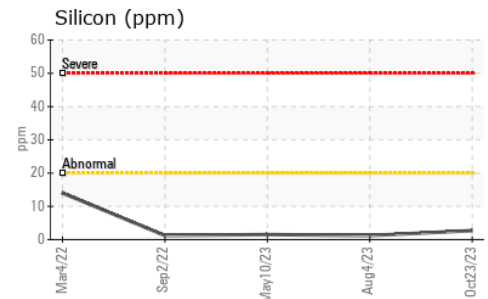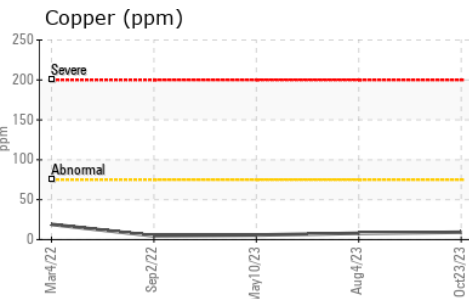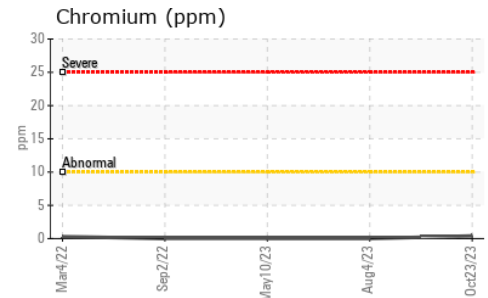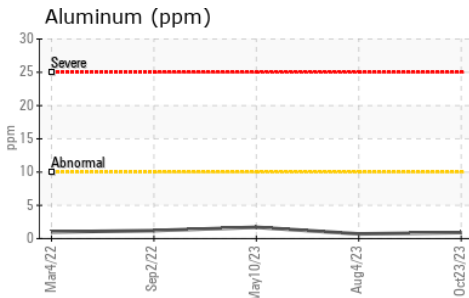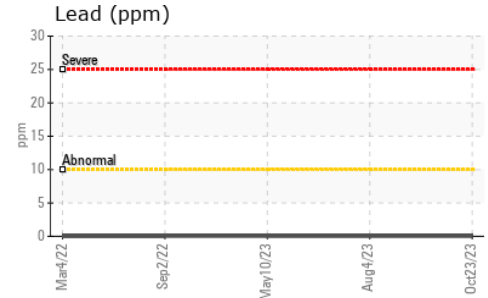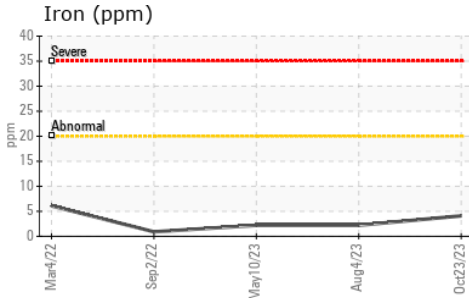

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0087005 **Received** : 30 Oct 2023  
**Lab Number** : 05993904 **Diagnosed** : 01 Nov 2023  
**Unique Number** : 10722264 **Diagnostician** : Sean Felton  
**Test Package** : MOB 1

**Kemp Quarries - Pryor Stone - Pryor**  
 1050 E 520 Rd  
 Pryor, OK  
 US 74361  
 Contact:  
 pryor@pryorstone.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: