

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
[65440]
 Machine Id
WL099
 Component
Hydraulic System
 Fluid
PETRO CANADA HYDREX AW 68 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. (Customer Sample Comment: PM-1 changed filters)

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0087065	---	---
Sample Date	Client Info	20 Oct 2023	---	---
Machine Age	hrs Client Info	2080	---	---
Oil Age	hrs Client Info	2080	---	---
Oil Changed	Client Info	N/A	---	---
Sample Status		NORMAL	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron ppm ASTM D5185m	>20	2	---	---
Chromium ppm ASTM D5185m	>10	<1	---	---
Nickel ppm ASTM D5185m	>10	0	---	---
Titanium ppm ASTM D5185m		<1	---	---
Silver ppm ASTM D5185m		<1	---	---
Aluminum ppm ASTM D5185m	>10	<1	---	---
Lead ppm ASTM D5185m	>10	0	---	---
Copper ppm ASTM D5185m	>75	45	---	---
Tin ppm ASTM D5185m	>10	<1	---	---
Vanadium ppm ASTM D5185m		0	---	---
Cadmium ppm ASTM D5185m		<1	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron ppm ASTM D5185m	0	17	---	---
Barium ppm ASTM D5185m	0	19	---	---
Molybdenum ppm ASTM D5185m	0	11	---	---
Manganese ppm ASTM D5185m	0	<1	---	---
Magnesium ppm ASTM D5185m	0	182	---	---
Calcium ppm ASTM D5185m	50	387	---	---
Phosphorus ppm ASTM D5185m	330	508	---	---
Zinc ppm ASTM D5185m	430	597	---	---
Sulfur ppm ASTM D5185m	760	2340	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon ppm ASTM D5185m	>20	3	---	---
Sodium ppm ASTM D5185m		3	---	---
Potassium ppm ASTM D5185m	>20	0	---	---


VISUAL

method	limit/base	current	history1	history2
White Metal scalar *Visual	NONE	NONE	---	---
Yellow Metal scalar *Visual	NONE	NONE	---	---
Precipitate scalar *Visual	NONE	NONE	---	---
Silt scalar *Visual	NONE	NONE	---	---
Debris scalar *Visual	NONE	NONE	---	---
Sand/Dirt scalar *Visual	NONE	NONE	---	---
Appearance scalar *Visual	NORML	NORML	---	---
Odor scalar *Visual	NORML	NORML	---	---
Emulsified Water scalar *Visual	>0.1	NEG	---	---
Free Water scalar *Visual		NEG	---	---

FLUID PROPERTIES









method	limit/base	current	history1	history2
Visc @ 40°C cSt ASTM D445	67.4	69.9	---	---

OIL ANALYSIS REPORT

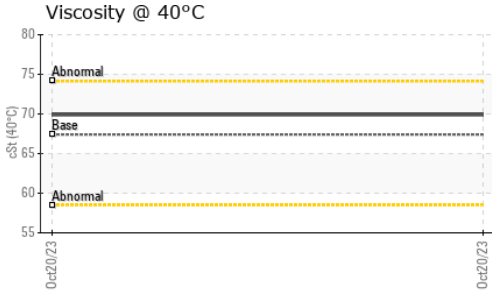

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

GRAPHS

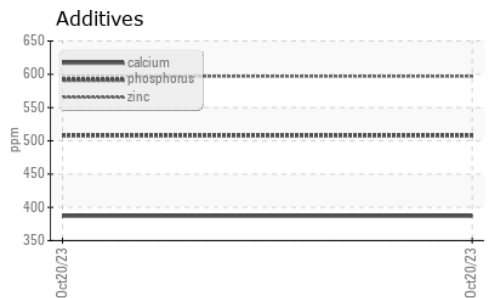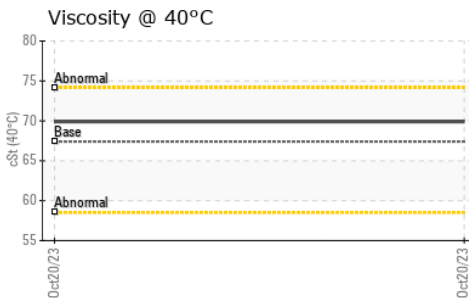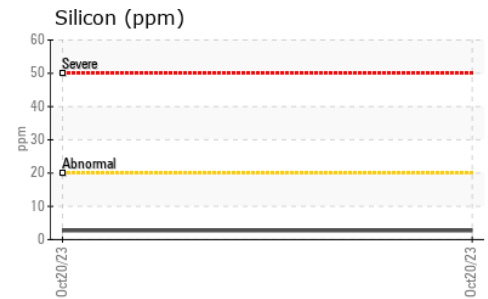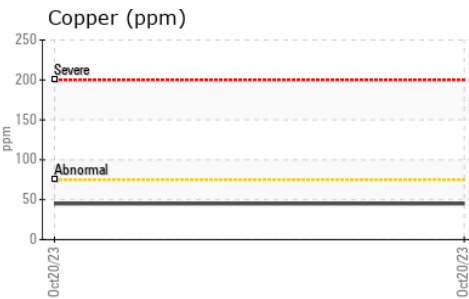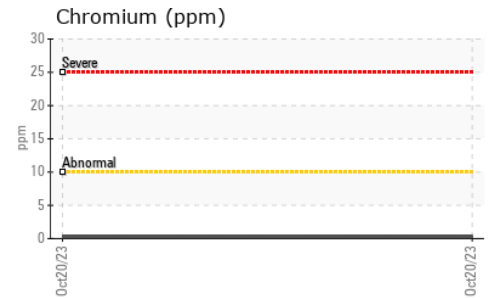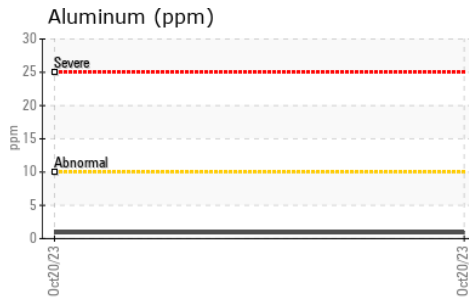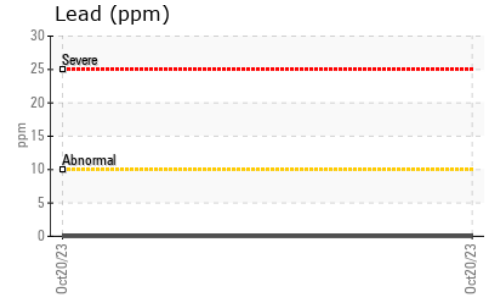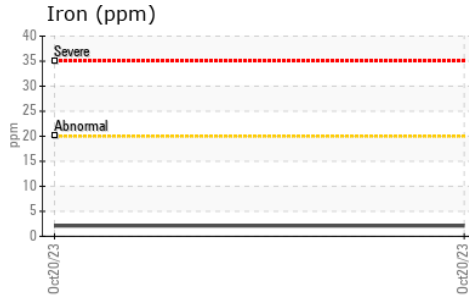

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0087065 **Received** : 30 Oct 2023
Lab Number : 05993905 **Diagnosed** : 01 Nov 2023
Unique Number : 10722265 **Diagnostician** : Sean Felton
Test Package : MOB 1

Kemp Quarries - Pryor Stone - Pryor
 1050 E 520 Rd
 Pryor, OK
 US 74361
 Contact:
 pryor@pryorstone.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: