

# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**VOLVO L120H L120H5**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA 15W40 (7 GAL)**



## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a components first oil change.

### Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0090839</b>	---	---
Sample Date	Client Info		<b>19 Oct 2023</b>	---	---
Machine Age	hrs	Client Info	<b>224</b>	---	---
Oil Age	hrs	Client Info	<b>224</b>	---	---
Oil Changed	Client Info		<b>Changed</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Glycol	WC Method		<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>18</b>	---	---
Chromium	ppm	ASTM D5185m >6	<b>4</b>	---	---
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185m >20	<b>57</b>	---	---
Lead	ppm	ASTM D5185m >95	<b>2</b>	---	---
Copper	ppm	ASTM D5185m >85	<b>11</b>	---	---
Tin	ppm	ASTM D5185m >9	<b>2</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>72</b>	---	---
Barium	ppm	ASTM D5185m	<b>8</b>	---	---
Molybdenum	ppm	ASTM D5185m	<b>32</b>	---	---
Manganese	ppm	ASTM D5185m	<b>3</b>	---	---
Magnesium	ppm	ASTM D5185m	<b>482</b>	---	---
Calcium	ppm	ASTM D5185m	<b>1459</b>	---	---
Phosphorus	ppm	ASTM D5185m	<b>973</b>	---	---
Zinc	ppm	ASTM D5185m	<b>996</b>	---	---
Sulfur	ppm	ASTM D5185m	<b>3264</b>	---	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>15</b>	---	---
Sodium	ppm	ASTM D5185m	<b>5</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>3</b>	---	---
Fuel	%	ASTM D3524 >4.0	<b>0.3</b>	---	---




## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0.1</b>	---	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>5.9</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.2</b>	---	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>17.2</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	<b>10.29</b>	---	---









# OIL ANALYSIS REPORT

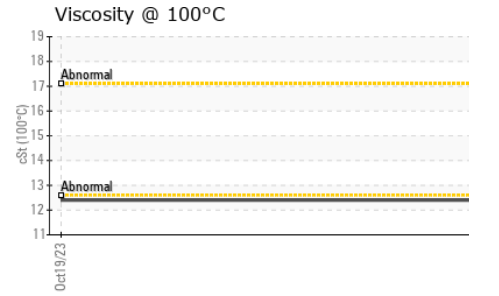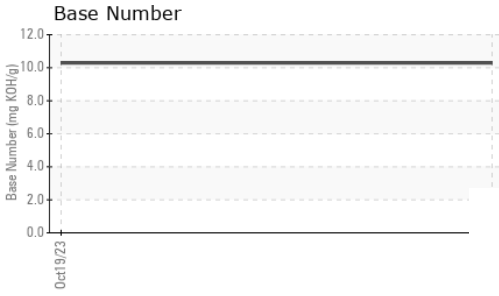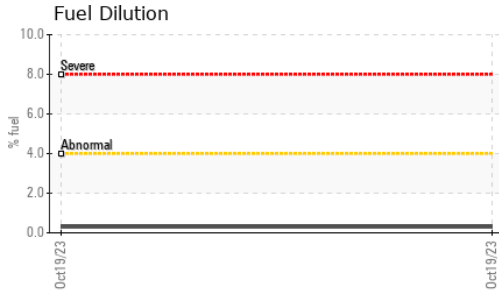

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.4	---	---

## GRAPHS

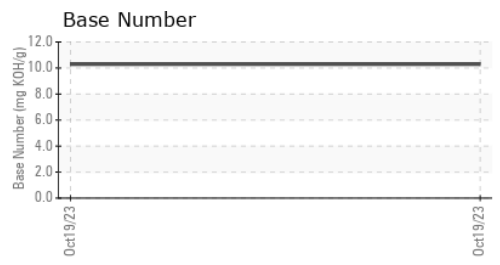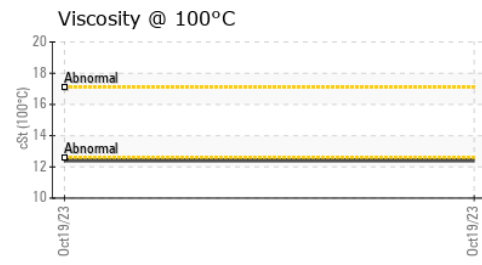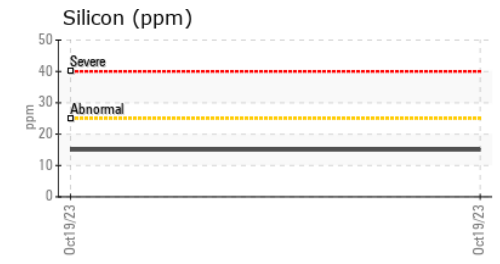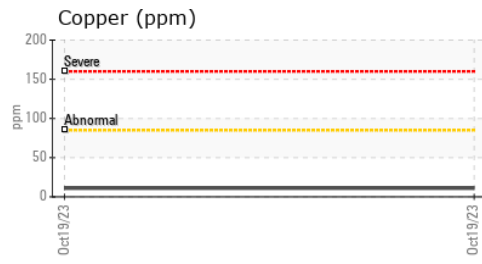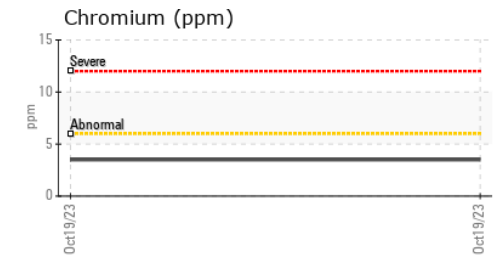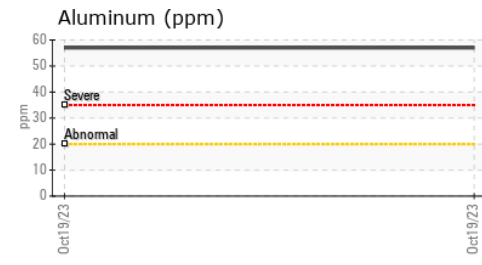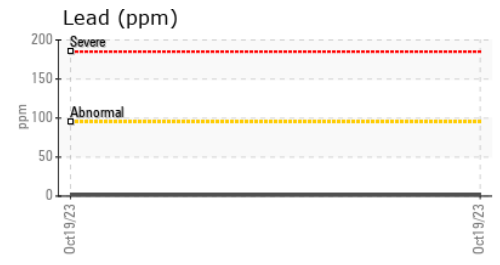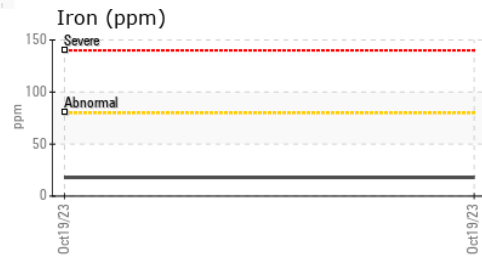

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0090839 **Received** : 31 Oct 2023  
**Lab Number** : 05994513 **Diagnosed** : 03 Nov 2023  
**Unique Number** : 10722873 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2 ( Additional Tests: FuelDilution, PercentFuel )

**J F PRICE**  
 611 PLEASANT ST  
 E WEYMOUTH, MA  
 US 02189  
 Contact: JOHN LANG  
 gnalj1970@comcast.net  
 T: (617)435-7199  
 F: (781)337-4150

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)