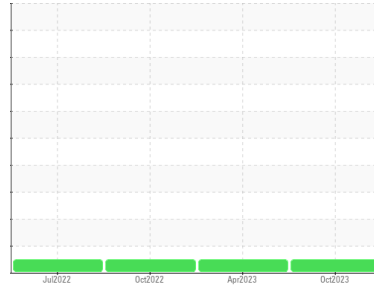


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL


Area
{UNASSIGNED}
 Machine Id
JOHN DEERE JD350
 Component
Rear Diesel Engine
 Fluid
NOT GIVEN (8 GAL)

DIAGNOSIS
Recommendation

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0098373	PCA0090829	PCA0072129
Sample Date	Client Info			25 Oct 2023	15 Apr 2023	01 Oct 2022
Machine Age	hrs	Client Info		2744	2457	1887
Oil Age	hrs	Client Info		287	570	228
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>51	32	17	19
Chromium	ppm	ASTM D5185m	>11	<1	0	<1
Nickel	ppm	ASTM D5185m	>5	2	3	2
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	<1
Aluminum	ppm	ASTM D5185m	>31	3	<1	3
Lead	ppm	ASTM D5185m	>26	0	0	0
Copper	ppm	ASTM D5185m	>26	2	2	1
Tin	ppm	ASTM D5185m	>4	<1	<1	1
Vanadium	ppm	ASTM D5185m		0	0	<1
Cadmium	ppm	ASTM D5185m		0	0	0




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		275	27	6
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		236	65	57
Manganese	ppm	ASTM D5185m		<1	<1	1
Magnesium	ppm	ASTM D5185m		755	839	923
Calcium	ppm	ASTM D5185m		1354	1144	1222
Phosphorus	ppm	ASTM D5185m		852	937	989
Zinc	ppm	ASTM D5185m		1001	1105	1249
Sulfur	ppm	ASTM D5185m		2820	3584	3491

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>22	14	3	4
Sodium	ppm	ASTM D5185m	>31	4	3	1
Potassium	ppm	ASTM D5185m	>20	1	0	0
Fuel	%	ASTM D3524	>2.1	0.2	0.2	<1.0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.1	0.2	0.3
Nitration	Abs/cm	*ASTM D7624	>20	6.5	5.6	6.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.5	18.0	19.4

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.7	12.6	14.1
Base Number (BN)	mg KOH/g	ASTM D2896		7.73	10.07	9.25









OIL ANALYSIS REPORT

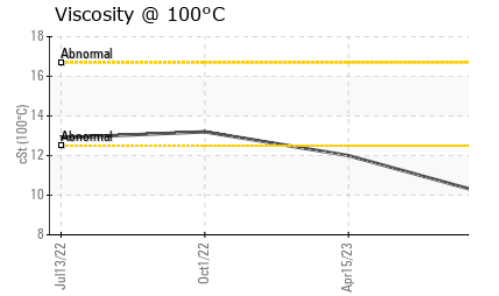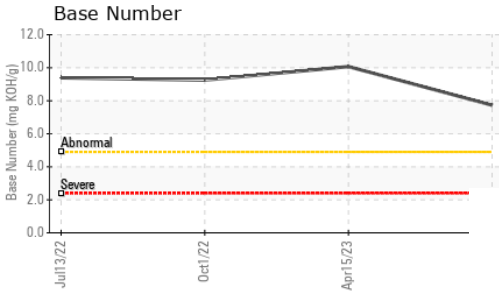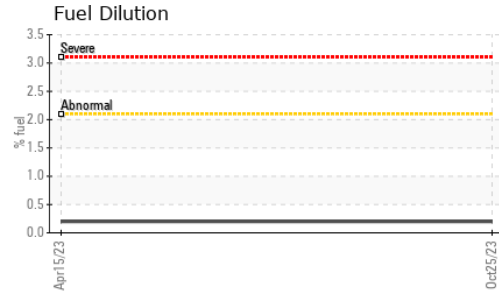

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	10.0	12.0	13.2

GRAPHS

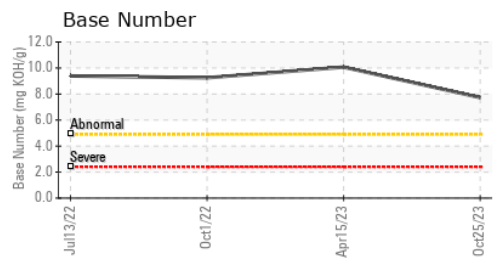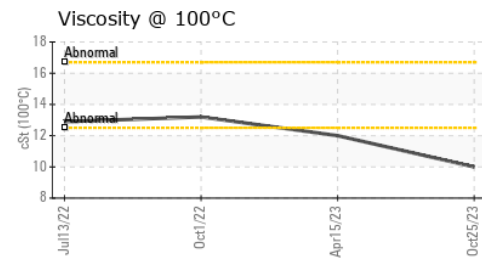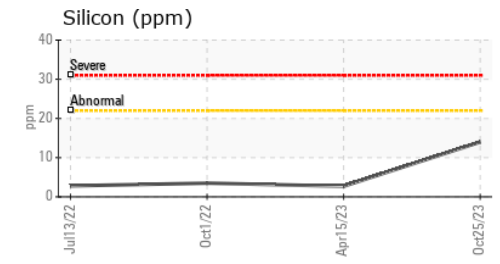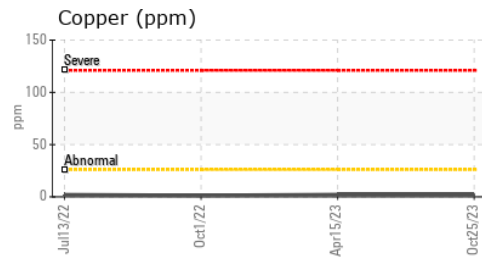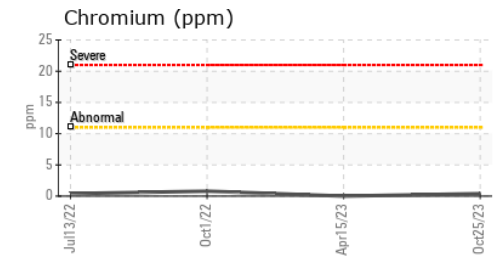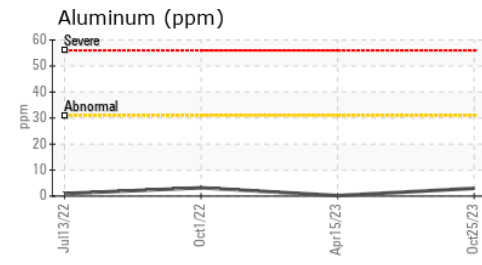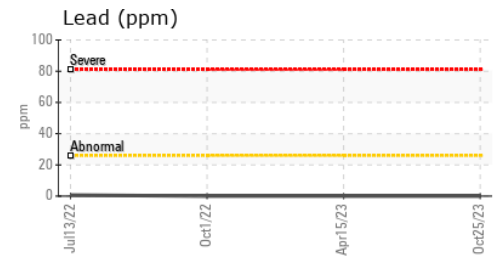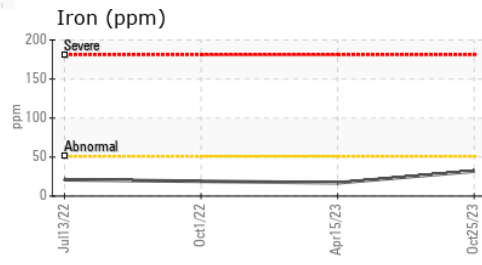

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0098373 **Received** : 31 Oct 2023
Lab Number : 05994520 **Diagnosed** : 03 Nov 2023
Unique Number : 10722880 **Diagnostician** : Jonathan Hester
Test Package : MOB 2 (Additional Tests: FuelDilution, PercentFuel)

J F PRICE
 611 PLEASANT ST
 E WEYMOUTH, MA
 US 02189
 Contact: JOHN LANG
 gnalj1970@comcast.net
 T: (617)435-7199
 F: (781)337-4150

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)