


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

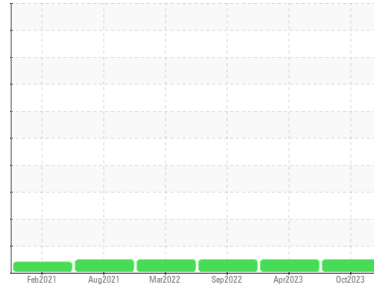

Machine Id  
**DT754**  
Component  
**Rear Differential**  
Fluid  
**CHEVRON DELO SYNTHETIC GEAR 75W90 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0103315</b>	PCA0091243	PCA0074830
Sample Date	Client Info		<b>24 Oct 2023</b>	10 Apr 2023	09 Sep 2022
Machine Age	mls	Client Info	<b>153675</b>	128484	103085
Oil Age	mls	Client Info	<b>103109</b>	103317	25167
Oil Changed	Client Info		<b>Changed</b>	Not Changd	Not Changd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >870	<b>176</b>	191	141
Chromium	ppm	ASTM D5185m >8	<b>1</b>	1	<1
Nickel	ppm	ASTM D5185m >25	<b>7</b>	8	5
Titanium	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >40	<b>5</b>	3	3
Lead	ppm	ASTM D5185m >25	<b>1</b>	0	0
Copper	ppm	ASTM D5185m >60	<b>2</b>	1	<1
Tin	ppm	ASTM D5185m >5	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>188</b>	236	281
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>10</b>	13	11
Manganese	ppm	ASTM D5185m	<b>3</b>	3	2
Magnesium	ppm	ASTM D5185m	<b>104</b>	99	88
Calcium	ppm	ASTM D5185m	<b>136</b>	185	144
Phosphorus	ppm	ASTM D5185m	<b>1419</b>	1510	1338
Zinc	ppm	ASTM D5185m	<b>140</b>	165	135
Sulfur	ppm	ASTM D5185m	<b>21433</b>	19740	21079

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >285	<b>91</b>	97	79
Sodium	ppm	ASTM D5185m	<b>4</b>	2	<1
Potassium	ppm	ASTM D5185m >20	<b>2</b>	1	0


## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG

## FLUID PROPERTIES




	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 106	<b>85.3</b>	86.1	89.5

# OIL ANALYSIS REPORT

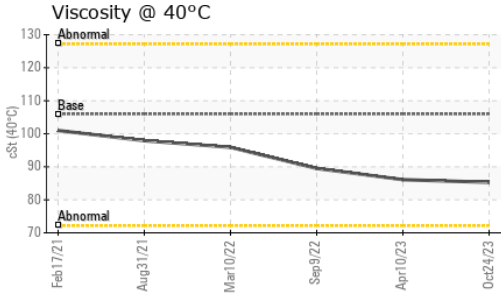

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

## GRAPHS

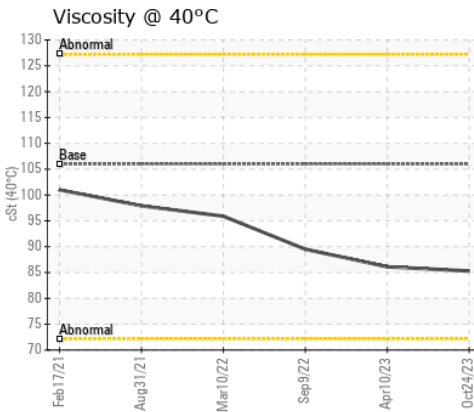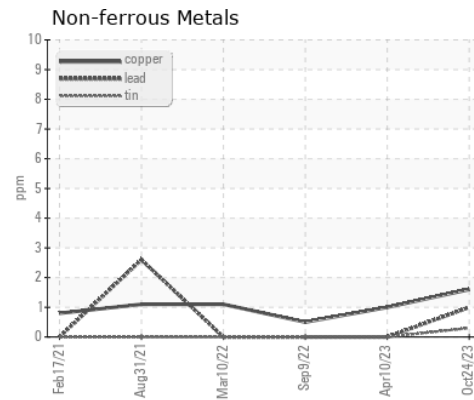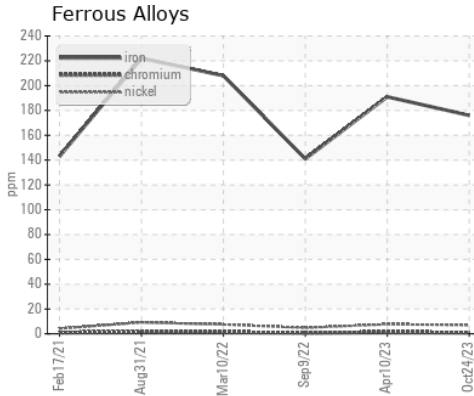

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0103315  
**Lab Number** : 05994802  
**Unique Number** : 10723162  
**Test Package** : FLEET

**NW WHITE & CO - ANDERSON DIVISION**  
 2605 RIVER RD  
 PIEDMONT, SC  
 US 29673  
 Contact: James Threatt  
 jthreatt@nwwhite.com  
 T: (864)918-4646  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)