


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

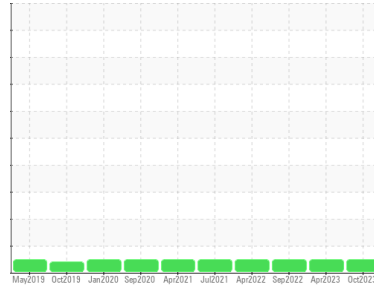

Machine Id
DT632
Component
Front Differential
Fluid
CHEVRON RPM SYNTHETIC GEAR 75W90 (4 mls)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0103291	PCA0091244	PCA0080930
Sample Date	Client Info		27 Oct 2023	21 Apr 2023	27 Sep 2022
Machine Age	mls	Client Info	267491	242230	215908
Oil Age	mls	Client Info	267491	178348	152026
Oil Changed	Client Info		Not Chngd	Changed	Not Chngd
Sample Status			NORMAL	NORMAL	NORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >870	163	96	90
Chromium	ppm	ASTM D5185m >8	1	<1	0
Nickel	ppm	ASTM D5185m >25	6	5	5
Titanium	ppm	ASTM D5185m >4	0	0	<1
Silver	ppm	ASTM D5185m	0	0	<1
Aluminum	ppm	ASTM D5185m >40	9	<1	2
Lead	ppm	ASTM D5185m >25	<1	0	0
Copper	ppm	ASTM D5185m >60	<1	<1	1
Tin	ppm	ASTM D5185m >5	<1	0	0
Vanadium	ppm	ASTM D5185m	0	0	2
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	190	243	245
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	14	3	4
Manganese	ppm	ASTM D5185m	2	1	2
Magnesium	ppm	ASTM D5185m	146	39	37
Calcium	ppm	ASTM D5185m	212	48	42
Phosphorus	ppm	ASTM D5185m	1394	1357	1501
Zinc	ppm	ASTM D5185m	203	63	38
Sulfur	ppm	ASTM D5185m	20516	24535	25056

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >285	23	26	27
Sodium	ppm	ASTM D5185m	3	0	1
Potassium	ppm	ASTM D5185m >20	2	2	0


VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual NONE	NONE	NONE	NONE
Silt	scalar	*Visual NONE	NONE	NONE	NONE
Debris	scalar	*Visual NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	NONE
Appearance	scalar	*Visual NORML	NORML	NORML	NORML
Odor	scalar	*Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual >.2	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG

FLUID PROPERTIES




	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 110	80.5	94.1	95.1

OIL ANALYSIS REPORT

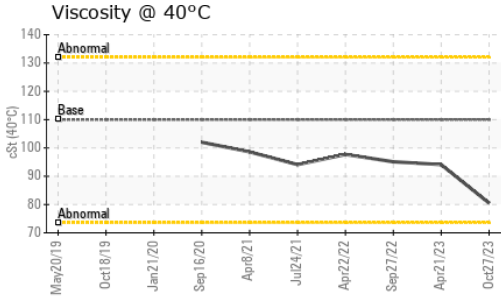

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

GRAPHS

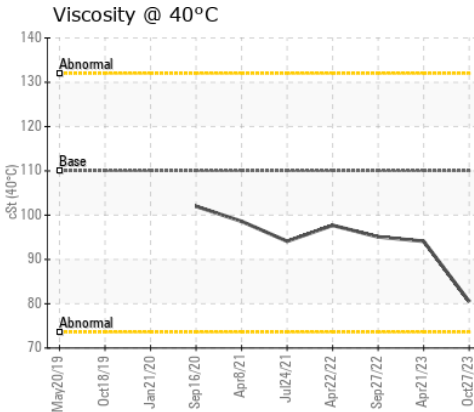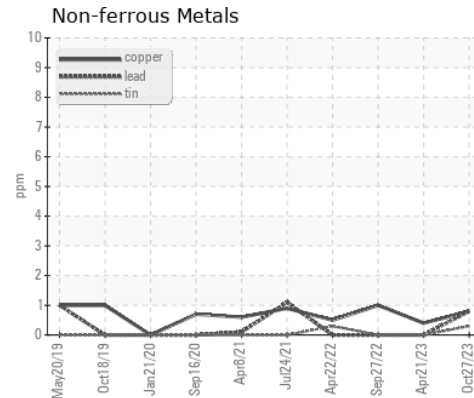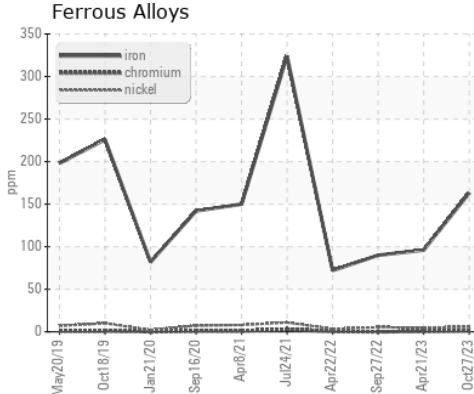

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0103291 **Received** : 31 Oct 2023
Lab Number : 05994807 **Diagnosed** : 02 Nov 2023
Unique Number : 10723167 **Diagnostician** : Don Baldrige
Test Package : FLEET

NW WHITE & CO - ANDERSON DIVISION
 2605 RIVER RD
 PIEDMONT, SC
 US 29673
 Contact: James Threatt
 jthreatt@nwwhite.com
 T: (864)918-4646
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)