


# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**

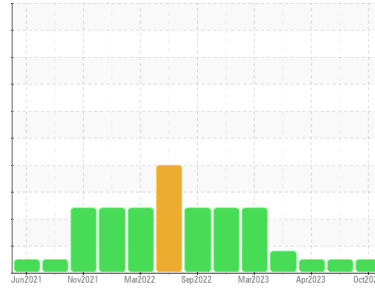

Machine Id  
**11009**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (9 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0106009</b>	PCA0095298	PCA0095334
Sample Date	Client Info			<b>23 Oct 2023</b>	21 Jul 2023	20 Apr 2023
Machine Age	hrs	Client Info		<b>10644</b>	10284	9971
Oil Age	hrs	Client Info		<b>360</b>	313	200
Oil Changed	Client Info			<b>Not Chngd</b>	Not Chngd	Not Chngd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method		>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>75	<b>8</b>	6	13
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>15	<b>2</b>	4	2
Lead	ppm	ASTM D5185m	>25	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m	>100	<b>&lt;1</b>	2	<1
Tin	ppm	ASTM D5185m	>4	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<b>1</b>	1	4
Barium	ppm	ASTM D5185m	0	<b>4</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>60</b>	60	54
Manganese	ppm	ASTM D5185m	0	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m	1010	<b>862</b>	925	897
Calcium	ppm	ASTM D5185m	1070	<b>1008</b>	1034	985
Phosphorus	ppm	ASTM D5185m	1150	<b>1015</b>	961	955
Zinc	ppm	ASTM D5185m	1270	<b>1152</b>	1191	1170
Sulfur	ppm	ASTM D5185m	2060	<b>3157</b>	3238	3472

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>7</b>	3	7
Sodium	ppm	ASTM D5185m		<b>0</b>	5	1
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	2	<1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>6	<b>0.1</b>	0.5	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.2</b>	6.7	5.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.1</b>	18.3	15.9

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.5</b>	13.9	13.1
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>8.7</b>	9.0	7.7





# OIL ANALYSIS REPORT

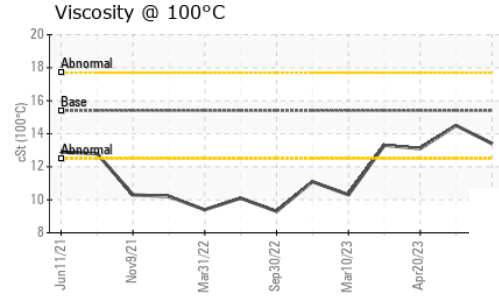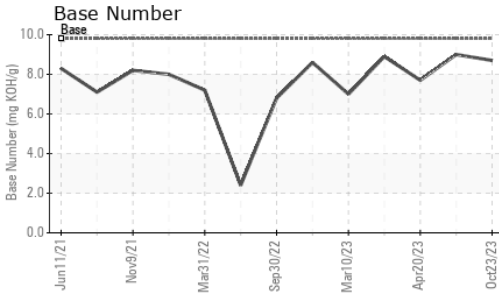

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.4</b>	14.5	13.1

## GRAPHS

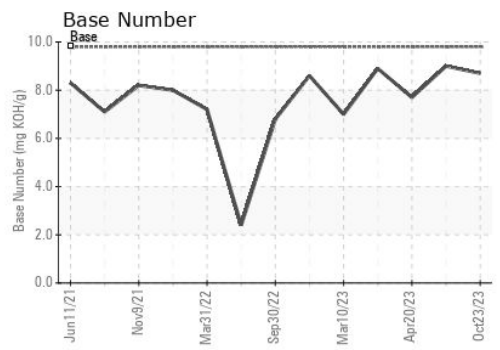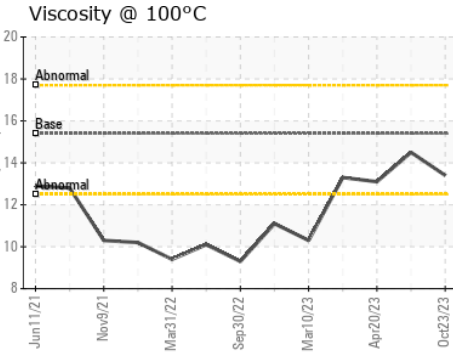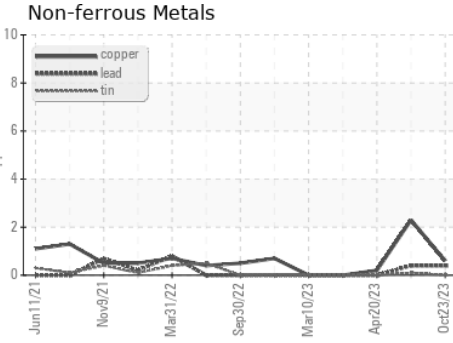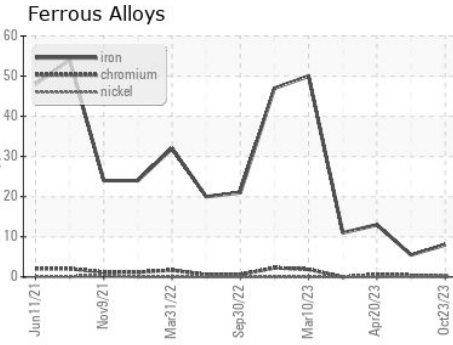

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0106009 **Received** : 31 Oct 2023  
**Lab Number** : 05994992 **Diagnosed** : 01 Nov 2023  
**Unique Number** : 10723352 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**LRS - BETHEL HEIGHTS (NWA AR)**  
 848 HWY 264 E  
 BETHEL HEIGHTS, AR  
 US 72764  
 Contact: ROBERT HEATH  
 rheath@lrsrecycles.com  
 T: (479)305-8958  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)