

Machine Id  
**M122 (S/N 2KS14377)**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON HP 15W40 (--- QTS)**

**DIAGNOSIS**

**Recommendation**

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

**Wear**

Metal levels are typical for a new component breaking in.

**Contamination**

There is no indication of any contamination in the oil.

**Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0098506</b>	PCA0083381	WC0594331
Sample Date	Client Info			<b>25 Oct 2023</b>	16 May 2023	24 Sep 2021
Machine Age	mls	Client Info		<b>18830</b>	18239	17863
Oil Age	mls	Client Info		<b>18830</b>	18239	17863
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>28</b>	14	6
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	0	0
Lead	ppm	ASTM D5185m	>40	<b>2</b>	<1	<1
Copper	ppm	ASTM D5185m	>330	<b>3</b>	6	1
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	<1
Antimony	ppm	ASTM D5185m		<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>10</b>	8	94
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>63</b>	65	78
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>1028</b>	990	796
Calcium	ppm	ASTM D5185m		<b>1111</b>	1109	1134
Phosphorus	ppm	ASTM D5185m		<b>1064</b>	1072	950
Zinc	ppm	ASTM D5185m		<b>1379</b>	1291	1025
Sulfur	ppm	ASTM D5185m		<b>3358</b>	3453	2474

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>22</b>	34	3
Sodium	ppm	ASTM D5185m		<b>1</b>	1	0
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	<1	<1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.5</b>	6.5	5.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.9</b>	19.2	18.5

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.9</b>	15.0	13.8
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>8.44</b>	10.03	10.0









# OIL ANALYSIS REPORT

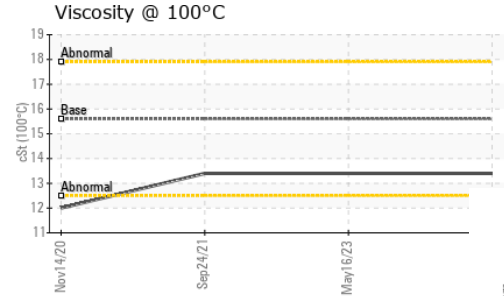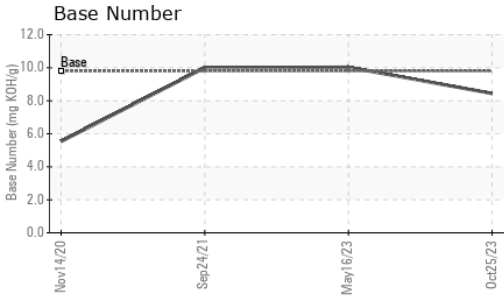

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.6	<b>13.4</b>	13.4

## GRAPHS

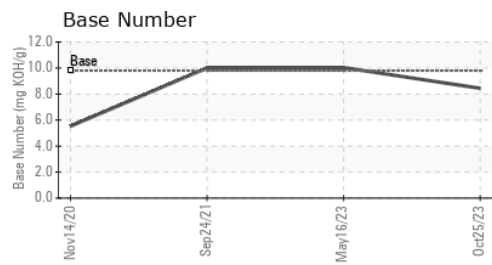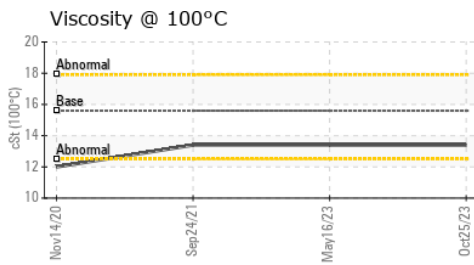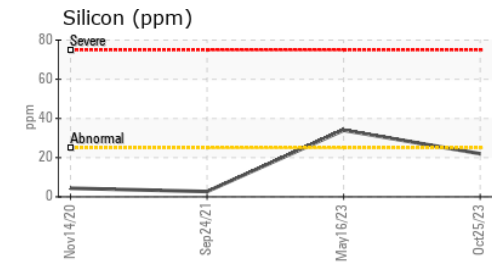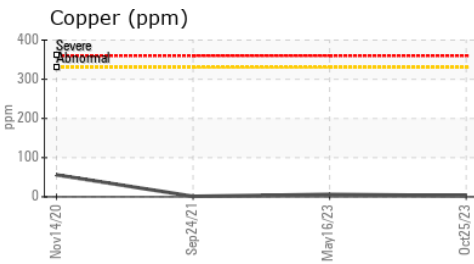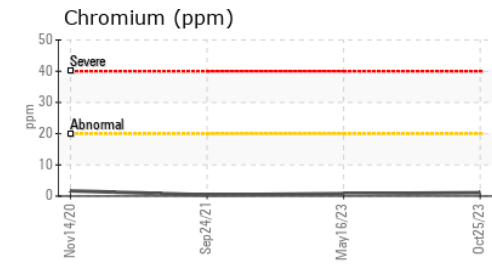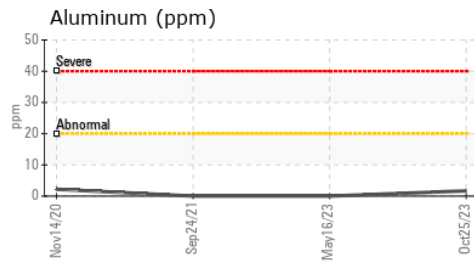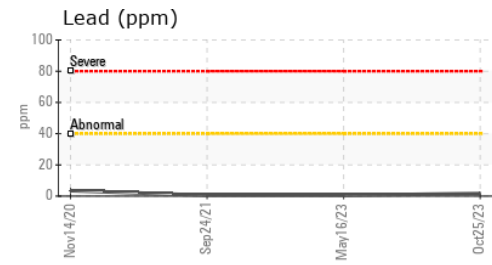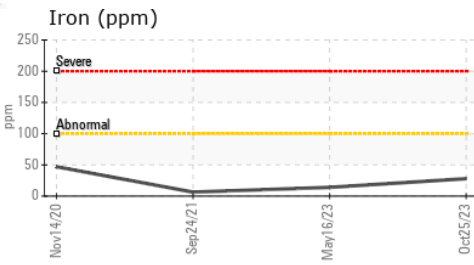

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0098506 **Received** : 31 Oct 2023  
**Lab Number** : 05995103 **Diagnosed** : 01 Nov 2023  
**Unique Number** : 10723463 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

**KOBYLUCK TRUCKING**  
 24 INDUSTRIAL DR  
 WATERFORD, CT  
 US 06385  
 Contact: GEORGE  
 GEORGE@KOBYLUCKINC.COM  
 T: (860)367-2002  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)