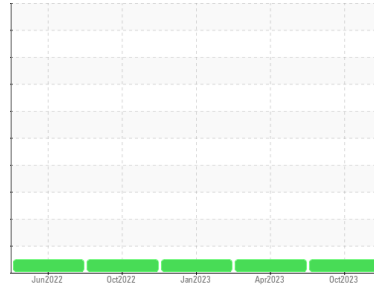


# OIL ANALYSIS REPORT

**Sample Rating Trend**

**NORMAL**


Machine Id  
**PETERBILT 379 K27 (S/N 2W508298)**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON HP 15W40 (--- QTS)**

**DIAGNOSIS**
**Recommendation**

Resample at the next service interval to monitor.

**Wear**

Metal levels are typical for a new component breaking in.

**Contamination**

There is no indication of any contamination in the oil.

**Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

**SAMPLE INFORMATION**

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0098502</b>	PCA0083378	WC0721434
Sample Date	Client Info		<b>23 Oct 2023</b>	16 Apr 2023	03 Jan 2023
Machine Age	mls	Client Info	<b>18097</b>	18053	17911
Oil Age	mls	Client Info	<b>18097</b>	18053	17911
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

**CONTAMINATION**

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

**WEAR METALS**

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>2</b>	10	16
Chromium	ppm	ASTM D5185m >20	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	<1	1
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	21	4
Tin	ppm	ASTM D5185m >15	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

**ADDITIVES**

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>11</b>	13	15
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>54</b>	66	65
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m	<b>923</b>	998	976
Calcium	ppm	ASTM D5185m	<b>1155</b>	1108	1127
Phosphorus	ppm	ASTM D5185m	<b>1057</b>	1002	1033
Zinc	ppm	ASTM D5185m	<b>1310</b>	1299	1226
Sulfur	ppm	ASTM D5185m	<b>3477</b>	3404	3625

**CONTAMINANTS**

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>8</b>	5	3
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	22	10
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	31	<1



**INFRA-RED**

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0</b>	0.1	0.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>4.3</b>	7.2	7.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>16.3</b>	18.9	19.5

**FLUID DEGRADATION**

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>11.8</b>	14.9	15.3
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>5.72</b>	10.87	7.62









# OIL ANALYSIS REPORT

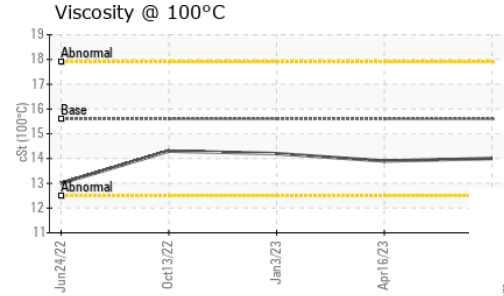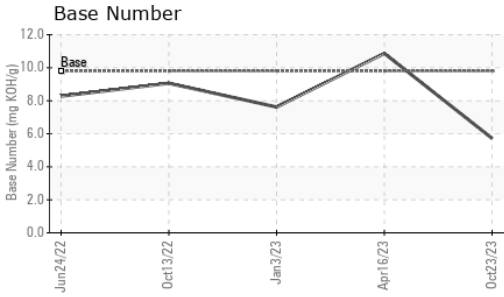

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.6	<b>14.0</b>	13.9	14.2

## GRAPHS

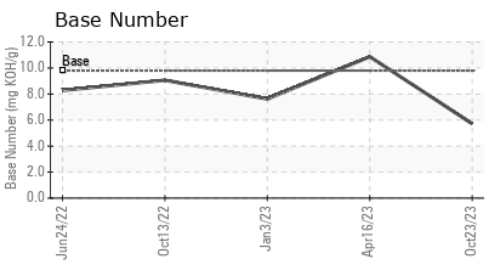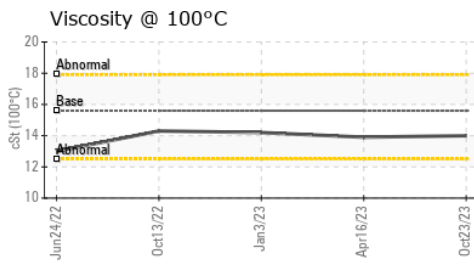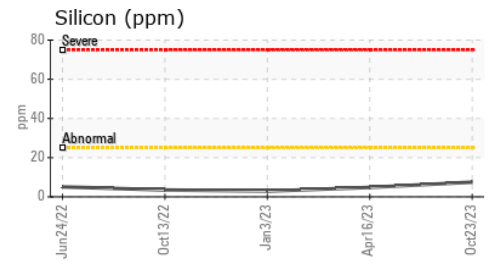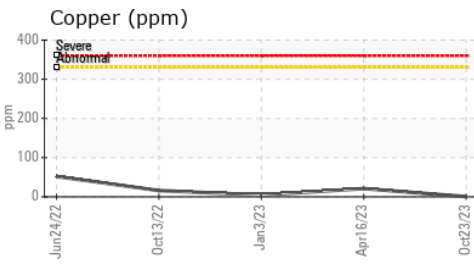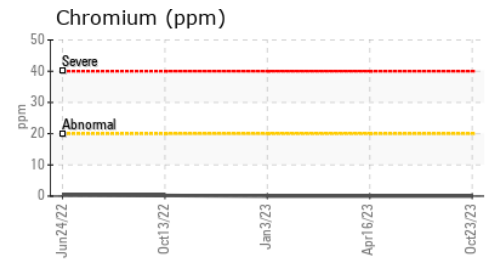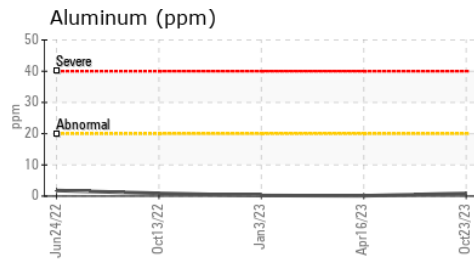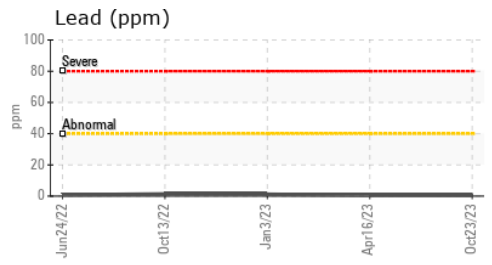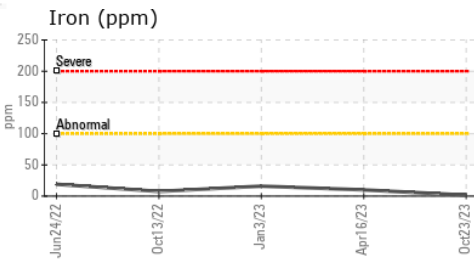

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0098502 **Received** : 31 Oct 2023  
**Lab Number** : **05995104** **Diagnosed** : 01 Nov 2023  
**Unique Number** : 10723464 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

**KOBYLUCK TRUCKING**  
 291 MAPLE AVE  
 MONTVILLE, CT  
 US 06353  
 Contact: GEORGE  
 george@kobyluckinc.com  
 T: (860)367-2002  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)