




PROBLEM SUMMARY

Sample Rating Trend

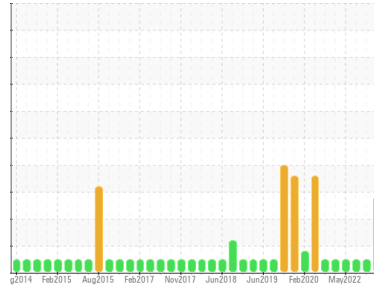

DIRT




Machine Id
11141

Component
Diesel Engine


Fluid
PETRO CANADA DURON SHP 15W40 (4 GAL)

COMPONENT CONDITION SUMMARY


▲ Silicon (ppm)

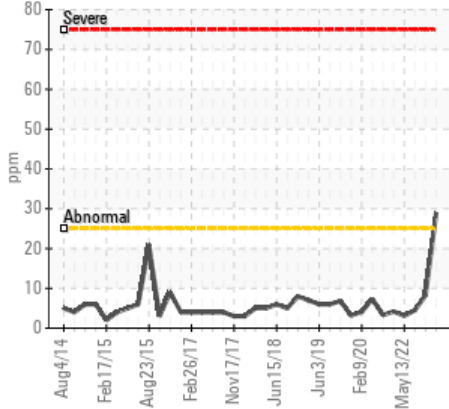

▲ Viscosity @ 100°C

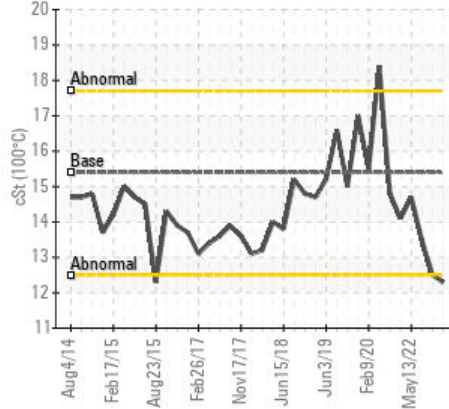

▲ Aluminum (ppm)

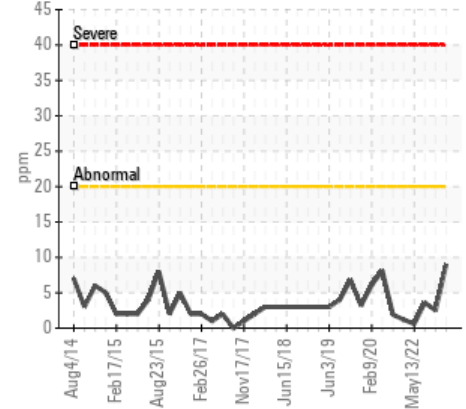

RECOMMENDATION

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. No corrective action is recommended at this time. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	NORMAL	NORMAL
Aluminum	ppm	ASTM D5185m	>20	▲ 9	2	4
Silicon	ppm	ASTM D5185m	>25	▲ 29	8	4
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 12.3	12.5	13.5

Customer Id: GFL732
Sample No.: GFL0089582
Lab Number: 05995311
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Check Dirt Access	---	---	?	We advise that you check the air filter, air induction system, and any areas where dirt may enter the component.

HISTORICAL DIAGNOSIS

02 Mar 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



07 Jun 2022 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. Metal levels are typical for a new component breaking in. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



13 May 2022 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Metal levels are typical for a new component breaking in. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

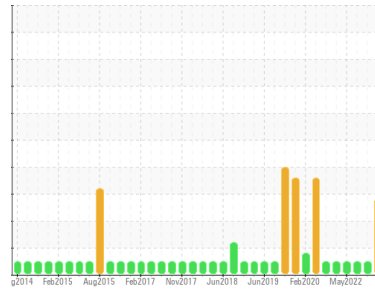

DIRT



Machine Id
11141

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (4 GAL)

DIAGNOSIS

Recommendation

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Fuel content negligible. Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0089582	GFL0046639	GFL0030597
Sample Date	Client Info	27 Oct 2023	02 Mar 2023	07 Jun 2022
Machine Age	days	0	0	90
Oil Age	days	0	0	90
Oil Changed	Client Info	Not Changed	N/A	Changed
Sample Status		ABNORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >100	52	21	16
Chromium	ppm	ASTM D5185m >20	2	<1	<1
Nickel	ppm	ASTM D5185m >4	1	0	0
Titanium	ppm	ASTM D5185m	<1	0	0
Silver	ppm	ASTM D5185m >3	<1	0	<1
Aluminum	ppm	ASTM D5185m >20	9	2	4
Lead	ppm	ASTM D5185m >40	1	0	1
Copper	ppm	ASTM D5185m >330	12	1	3
Tin	ppm	ASTM D5185m >15	<1	0	<1
Vanadium	ppm	ASTM D5185m	<1	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 0	30	4	17
Barium	ppm	ASTM D5185m 0	4	0	0
Molybdenum	ppm	ASTM D5185m 60	40	60	79
Manganese	ppm	ASTM D5185m 0	4	<1	<1
Magnesium	ppm	ASTM D5185m 1010	464	900	887
Calcium	ppm	ASTM D5185m 1070	1514	1044	1140
Phosphorus	ppm	ASTM D5185m 1150	725	918	1044
Zinc	ppm	ASTM D5185m 1270	849	1175	1237
Sulfur	ppm	ASTM D5185m 2060	2140	3177	3207

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	29	8	4
Sodium	ppm	ASTM D5185m	15	7	4
Potassium	ppm	ASTM D5185m >20	3	1	5
Fuel	%	ASTM D3524 >5	1.4	<1.0	<1.0

INFRA-RED

method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >3	0.3	0.6	0.5
Nitration	Abs/cm	*ASTM D7624 >20	8.5	11.5	8.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	22.3	21.3	20.2


FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	20.8	19.2	15.5
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	9.3	6.8	8.8




OIL ANALYSIS REPORT


▲ Silicon (ppm)

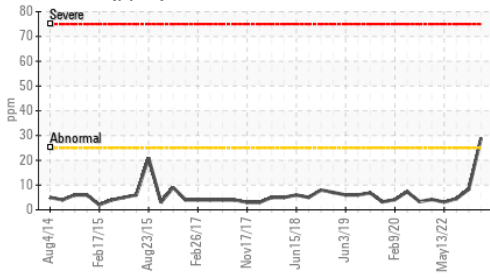


▲ Aluminum (ppm)

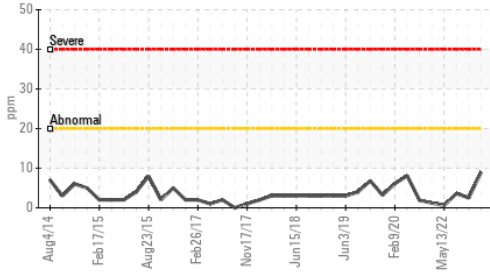


Fuel Dilution

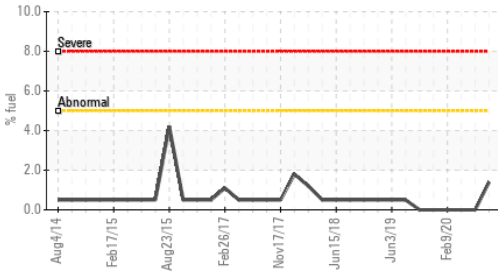

Fuel Dilution

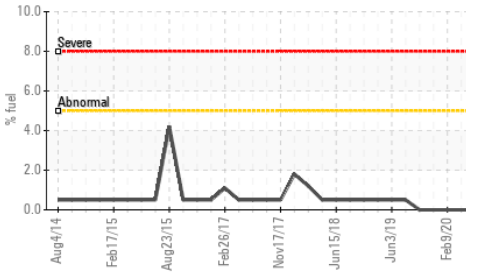

Base Number

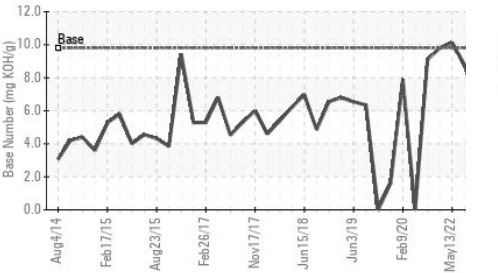


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4 ▲ 12.3	12.5	13.5

GRAPHS


Ferrous Alloys

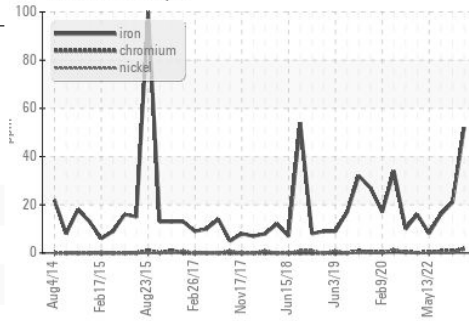


Non-ferrous Metals

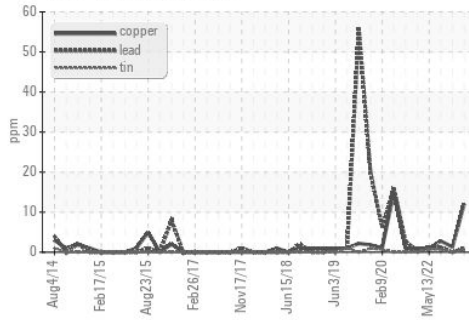

▲ Viscosity @ 100°C

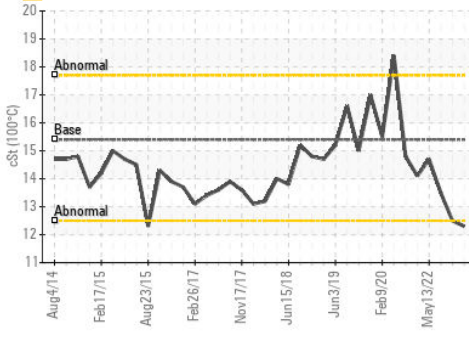

Base Number

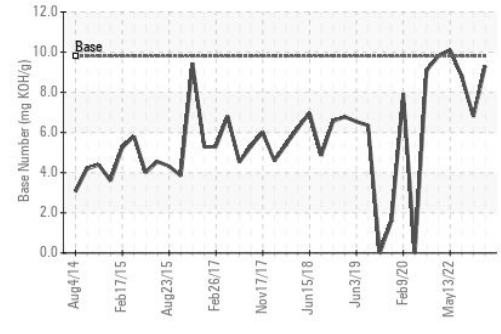

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0089582 **Received** : 01 Nov 2023
Lab Number : 05995311 **Diagnosed** : 06 Nov 2023
Unique Number : 10723671 **Diagnostician** : Jonathan Hester
Test Package : FLEET (Additional Tests: FUELDILUTION, PercentFuel)

GFL Environmental - 732 - Thomaston Hauling
 2616 Waynmanville Road
 Thomaston, GA
 US 30286
 Contact: WILLIAM BROWN
 william.brown@gflenv.com
 T: (706)936-4065
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)