




PROBLEM SUMMARY

Sample Rating Trend

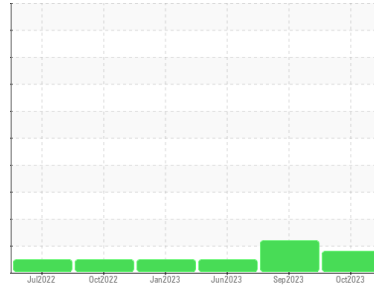


FUEL



Machine Id
420036
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

COMPONENT CONDITION SUMMARY

▲ Fuel Dilution

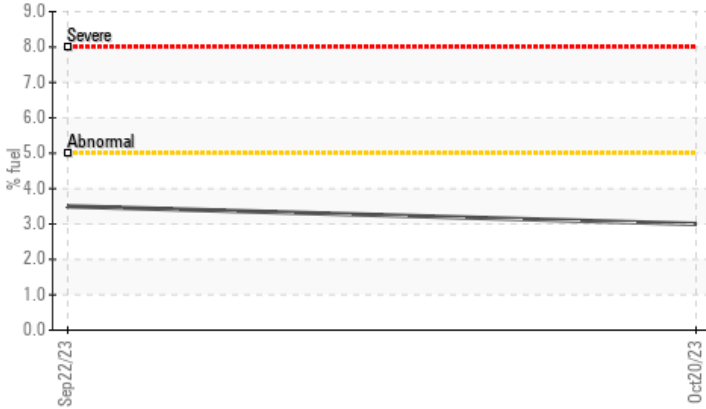

RECOMMENDATION

No corrective action is recommended at this time.
 Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status				MARGINAL	ABNORMAL	NORMAL
Fuel	%	ASTM D3524	>5	▲ 3.0	▲ 3.5	<1.0

Customer Id: GFL641
 Sample No.: GFL0097515
 Lab Number: 05995373
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Wes Davis +1 905-569-8600 x223
wesd@wearcheck.ca

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

There are no recommended actions for this sample.

HISTORICAL DIAGNOSIS

22 Sep 2023 Diag: Wes Davis

FUEL



Resample at the next service interval to monitor. All component wear rates are normal. Light fuel dilution occurring. The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The condition of the oil is suitable for further service.

view report



28 Jun 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



24 Jan 2023 Diag: Don Baldrige

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

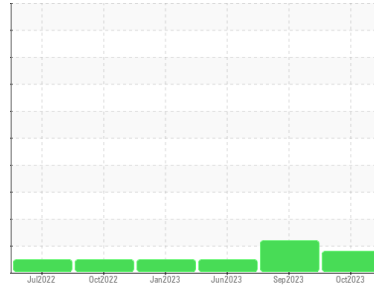

FUEL



Machine Id
420036

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

▲ Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0097515	GFL0092891	GFL0015791
Sample Date	Client Info	20 Oct 2023	22 Sep 2023	28 Jun 2023
Machine Age	hrs	7483	7332	6306
Oil Age	hrs	5891	5891	5891
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		MARGINAL	ABNORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >100	27	14	4
Chromium	ppm	ASTM D5185m >20	1	1	2
Nickel	ppm	ASTM D5185m >4	<1	<1	1
Titanium	ppm	ASTM D5185m	<1	0	2
Silver	ppm	ASTM D5185m >3	0	0	2
Aluminum	ppm	ASTM D5185m >20	5	<1	4
Lead	ppm	ASTM D5185m >40	<1	1	5
Copper	ppm	ASTM D5185m >330	<1	8	2
Tin	ppm	ASTM D5185m >15	<1	<1	2
Vanadium	ppm	ASTM D5185m	<1	0	1
Cadmium	ppm	ASTM D5185m	<1	0	2

ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 0	10	7	18
Barium	ppm	ASTM D5185m 0	<1	0	18
Molybdenum	ppm	ASTM D5185m 60	60	62	51
Manganese	ppm	ASTM D5185m 0	<1	<1	2
Magnesium	ppm	ASTM D5185m 1010	892	900	820
Calcium	ppm	ASTM D5185m 1070	1108	1069	986
Phosphorus	ppm	ASTM D5185m 1150	980	1042	883
Zinc	ppm	ASTM D5185m 1270	1218	1259	1068
Sulfur	ppm	ASTM D5185m 2060	3603	3021	3339

CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >25	4	3	5
Sodium	ppm	ASTM D5185m	5	3	3
Potassium	ppm	ASTM D5185m >20	9	1	7
Fuel	%	ASTM D3524 >5	▲ 3.0	▲ 3.5	<1.0

INFRA-RED




method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >3	0.3	0.2	0.1
Nitration	Abs/cm	*ASTM D7624 >20	9.8	9.7	5.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	20.3	20.2	17.7

FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	16.1	16.2	12.7
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	6.5	6.9	9.5







OIL ANALYSIS REPORT

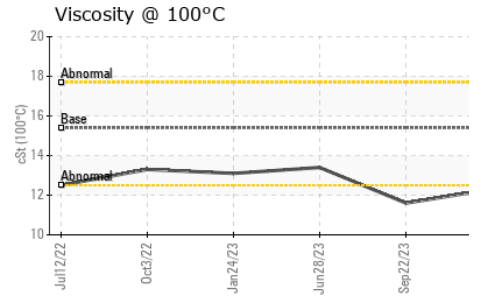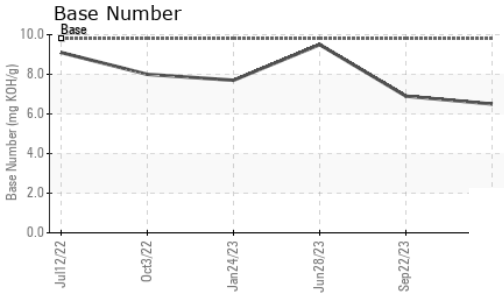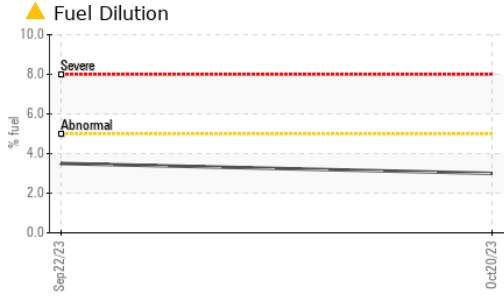

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	12.3	▲ 11.6 13.4

GRAPHS

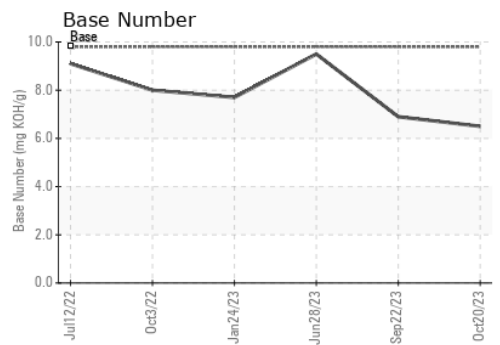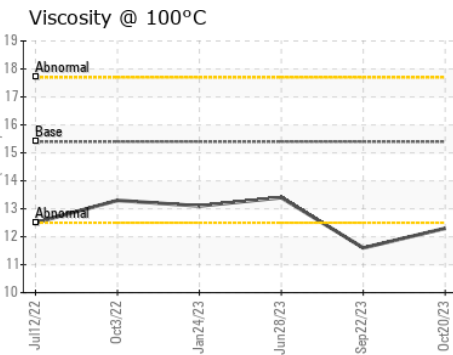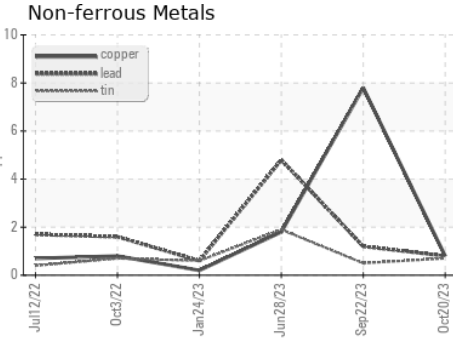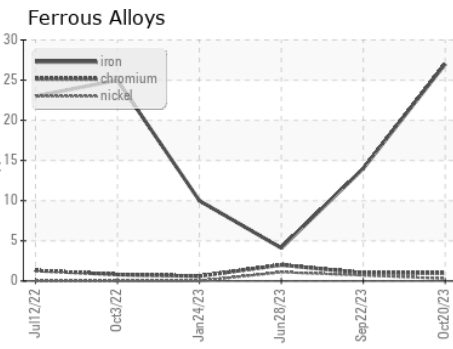

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0097515 **Received** : 01 Nov 2023
Lab Number : 05995373 **Diagnosed** : 03 Nov 2023
Unique Number : 10723733 **Diagnostician** : Wes Davis
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

GFL Environmental - 641 - Alpena
 1241 KING SETTLEMENT RD
 ALPENA, MI
 US 49707
 Contact: DYLAN TOLAN
 dylan.tolan@gflenv.com
 T: (989)854-7203
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)