


OIL ANALYSIS REPORT

Sample Rating Trend



FUEL

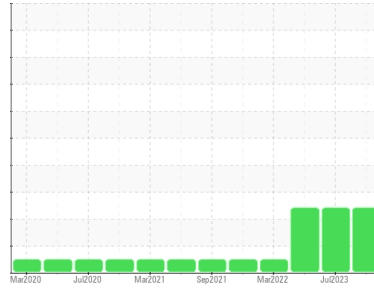

Machine Id
MACK 160-08
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (11 GAL)

DIAGNOSIS

Recommendation

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0106851	PCA0082152	PCA0070770
Sample Date	Client Info		04 Oct 2023	10 Jul 2023	13 Sep 2022
Machine Age	hrs	Client Info	30214	29778	28390
Oil Age	hrs	Client Info	500	510	500
Oil Changed	Client Info		Changed	N/A	Changed
Sample Status			SEVERE	SEVERE	SEVERE

CONTAMINATION

	method	limit/base	current	history1	history2
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	19	12	21
Chromium	ppm	ASTM D5185m >20	<1	<1	<1
Nickel	ppm	ASTM D5185m >5	<1	0	0
Titanium	ppm	ASTM D5185m >2	<1	<1	<1
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >20	2	0	1
Lead	ppm	ASTM D5185m >40	3	3	8
Copper	ppm	ASTM D5185m >330	8	4	9
Tin	ppm	ASTM D5185m >15	<1	<1	1
Vanadium	ppm	ASTM D5185m	<1	<1	0
Cadmium	ppm	ASTM D5185m	<1	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	0	3	4
Barium	ppm	ASTM D5185m 0	<1	0	0
Molybdenum	ppm	ASTM D5185m 60	57	55	51
Manganese	ppm	ASTM D5185m 0	0	<1	<1
Magnesium	ppm	ASTM D5185m 1010	896	901	775
Calcium	ppm	ASTM D5185m 1070	987	1002	946
Phosphorus	ppm	ASTM D5185m 1150	970	935	821
Zinc	ppm	ASTM D5185m 1270	1189	1111	1010
Sulfur	ppm	ASTM D5185m 2060	3322	3130	2514

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	2	2	2
Sodium	ppm	ASTM D5185m	2	6	<1
Potassium	ppm	ASTM D5185m >20	2	0	0
Fuel	%	ASTM D3524 >3.0	11.0	7.1	10.7

INFRA-RED


	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	0.8	0.4	0.6
Nitration	Abs/cm	*ASTM D7624 >20	7.4	7.7	9.0
Sulfation	Abs/.1mm	*ASTM D7415 >30	19.3	19.0	20.2

FLUID DEGRADATION


	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	14.4	15.4	16.9
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	9.0	8.9	10.2

OIL ANALYSIS REPORT


Fuel Dilution

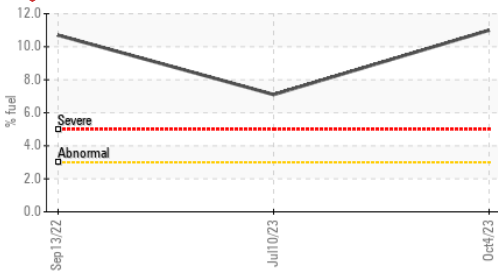

Viscosity @ 100°C

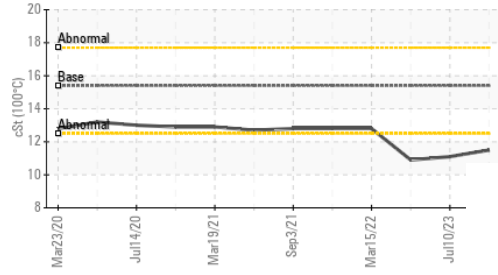

Base Number

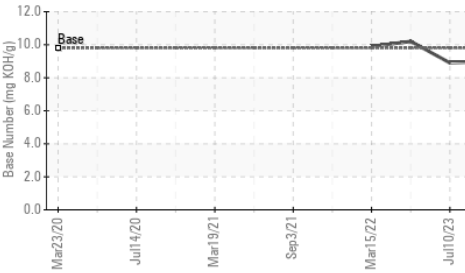

VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES


	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 11.5	▲ 11.1

GRAPHS


Iron (ppm)

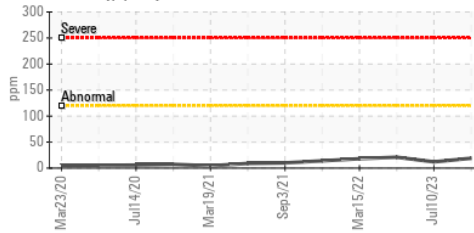


Lead (ppm)

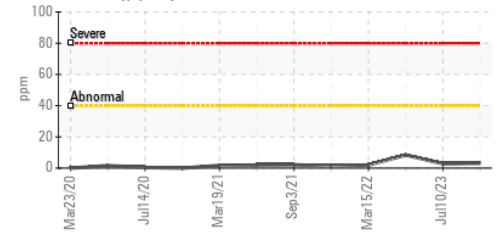


Aluminum (ppm)

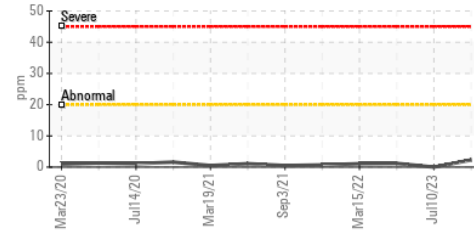


Chromium (ppm)

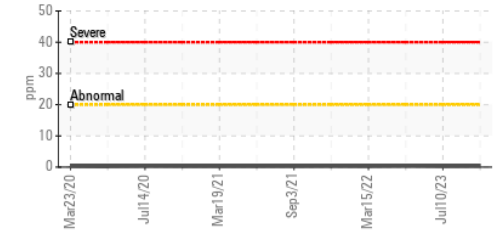


Copper (ppm)

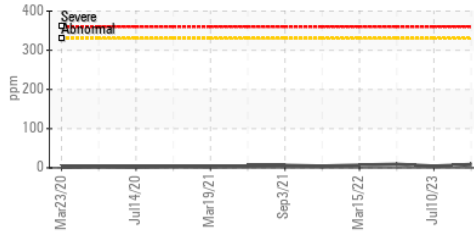


Silicon (ppm)

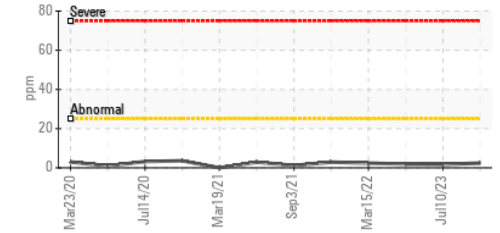

Viscosity @ 100°C

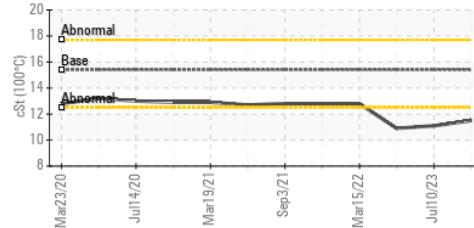

Base Number

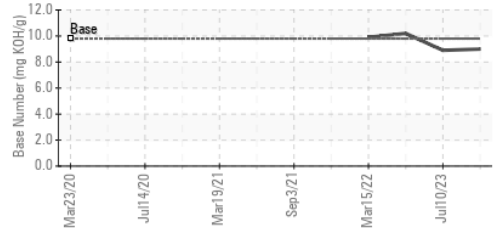

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0106851 **Received** : 01 Nov 2023
Lab Number : 05995409 **Diagnosed** : 03 Nov 2023
Unique Number : 10723769 **Diagnostician** : Wes Davis
Test Package : MOB 1 (Additional Tests: PercentFuel, TBN)

GE MARSHALL EXCAVATION
 1351 JOLIET RD
 VALPARAISO, IN
 US 46385
 Contact: MARK STEFFEL
 mark.steffel@gemarshall.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: