


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

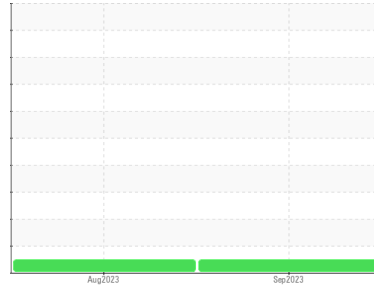

Area  
**(38604R) Walgreens - Tractor [PCA0107310]**  
 Machine Id  
**[Walgreens - Tractor] 136A69117**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0107310</b>	PCA0091782	---
Sample Date	Client Info		<b>27 Sep 2023</b>	10 Aug 2023	---
Machine Age	mls	Client Info	<b>95827</b>	94385	---
Oil Age	mls	Client Info	<b>7962</b>	6000	---
Oil Changed	Client Info		<b>Changed</b>	Changed	---
Sample Status			<b>NORMAL</b>	NORMAL	---

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>2.0	<b>&lt;1.0</b>	<1.0	---
Glycol	WC Method		<b>NEG</b>	NEG	---

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>29</b>	6	---
Chromium	ppm	ASTM D5185m >20	<b>1</b>	<1	---
Nickel	ppm	ASTM D5185m >4	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185m	<b>0</b>	0	---
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	---
Aluminum	ppm	ASTM D5185m >20	<b>5</b>	2	---
Lead	ppm	ASTM D5185m >40	<b>3</b>	1	---
Copper	ppm	ASTM D5185m >330	<b>6</b>	<1	---
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>4</b>	1	---
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m 50	<b>57</b>	60	---
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m 950	<b>892</b>	974	---
Calcium	ppm	ASTM D5185m 1050	<b>953</b>	1059	---
Phosphorus	ppm	ASTM D5185m 995	<b>963</b>	1071	---
Zinc	ppm	ASTM D5185m 1180	<b>1198</b>	1304	---
Sulfur	ppm	ASTM D5185m 2600	<b>2807</b>	3922	---

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	3	---
Sodium	ppm	ASTM D5185m	<b>5</b>	2	---
Potassium	ppm	ASTM D5185m >20	<b>14</b>	3	---



### INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.3</b>	0.1	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.5</b>	6.5	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.9</b>	17.8	---

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>17.1</b>	14.1	---
Base Number (BN)	mg KOH/g	ASTM D2896	<b>7.3</b>	9.3	---





# OIL ANALYSIS REPORT

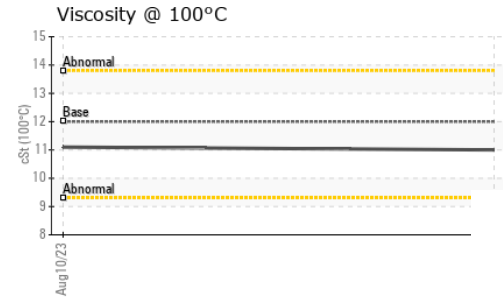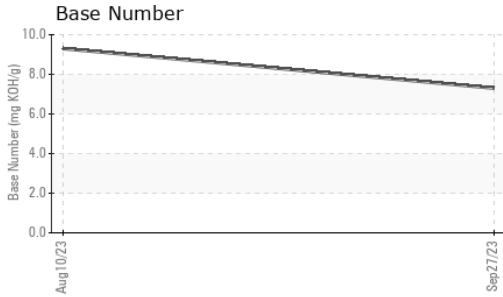

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.0</b>	11.1	---

## GRAPHS

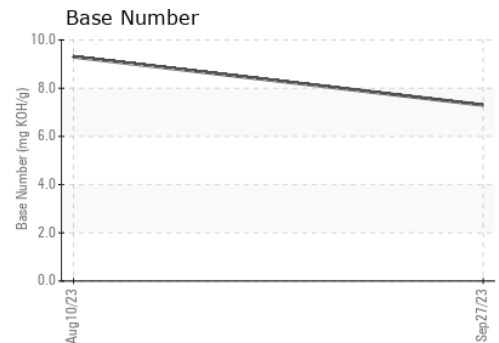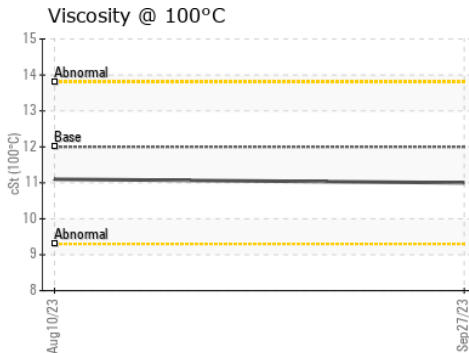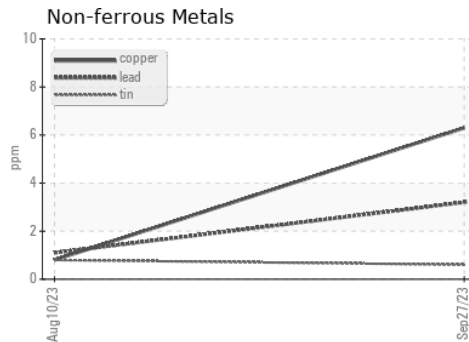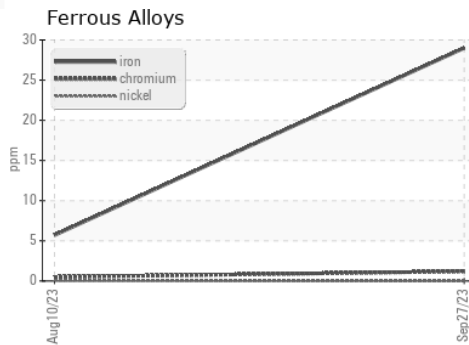

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0107310 **Received** : 01 Nov 2023  
**Lab Number** : 05996149 **Diagnosed** : 02 Nov 2023  
**Unique Number** : 10724509 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**Transervice - Shop 1368 - Berkeley-Cataño**  
 Calle Abeto 45, Reparto Solano  
 Caguas, PR  
 US 00725  
 Contact: Carlos Kercado  
 ckercado@transervice.com  
 T: (787)946-3435  
 F: (787)946-3434

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)