




# PROBLEM SUMMARY

Sample Rating Trend

WEAR




Machine Id  
**812016**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- QTS)**

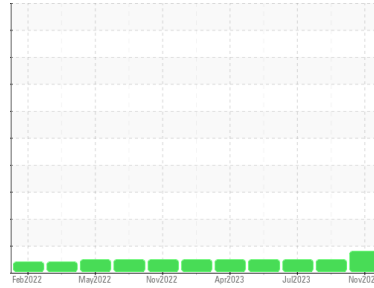

## COMPONENT CONDITION SUMMARY

### ▲ Aluminum (ppm)

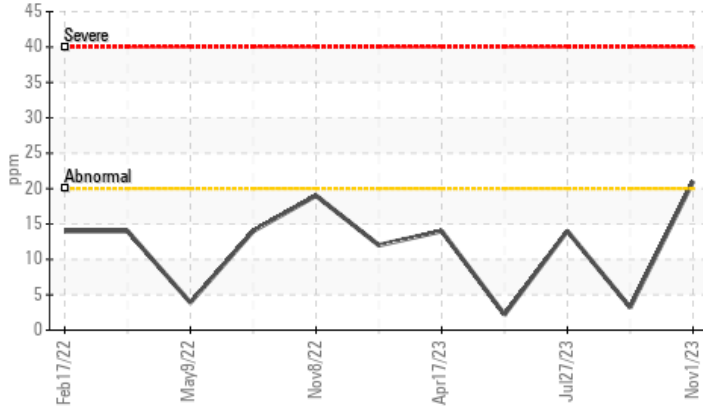

## RECOMMENDATION

The oil change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

## PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	NORMAL	NORMAL
Aluminum	ppm	ASTM D5185m	>20	▲ 21	3	14

Customer Id: GFL001  
Sample No.: GFL0094668  
Lab Number: 05996458  
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Sean Felton +1 919-379-4092  
[sfelton@wearcheckusa.com](mailto:sfelton@wearcheckusa.com)

To change component or sample information:  
Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

There are no recommended actions for this sample.

## HISTORICAL DIAGNOSIS

### 10 Aug 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. Please specify the component make and model with your next sample. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



### 27 Jul 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Metal levels are typical for a new component breaking in. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



### 15 May 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Metal levels are typical for a new component breaking in. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


view report





# OIL ANALYSIS REPORT

Sample Rating Trend

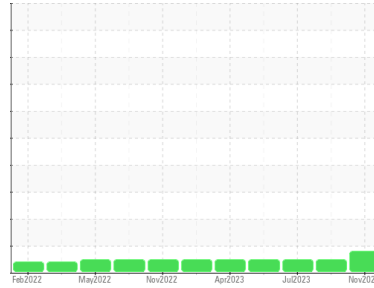

**WEAR**



Machine Id  
**812016**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- QTS)**

## DIAGNOSIS

### Recommendation

The oil change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

The aluminum level is abnormal. All other component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0094668</b>	GFL0089349	GFL0089266
Sample Date	Client Info		<b>01 Nov 2023</b>	10 Aug 2023	27 Jul 2023
Machine Age	hrs	Client Info	<b>5244</b>	4615	4485
Oil Age	hrs	Client Info	<b>629</b>	890	760
Oil Changed	Client Info		<b>Changed</b>	Changed	Not Changed
Sample Status			<b>ABNORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>16</b>	4	11
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m >20	<b>▲ 21</b>	3	14
Lead	ppm	ASTM D5185m >40	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m >330	<b>3</b>	<1	<1
Tin	ppm	ASTM D5185m >15	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>4</b>	4	2
Barium	ppm	ASTM D5185m 0	<b>0</b>	2	0
Molybdenum	ppm	ASTM D5185m 60	<b>63</b>	66	65
Manganese	ppm	ASTM D5185m 0	<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185m 1010	<b>911</b>	935	1076
Calcium	ppm	ASTM D5185m 1070	<b>1092</b>	1202	1138
Phosphorus	ppm	ASTM D5185m 1150	<b>985</b>	1066	1143
Zinc	ppm	ASTM D5185m 1270	<b>1211</b>	1252	1368
Sulfur	ppm	ASTM D5185m 2060	<b>3236</b>	3411	3797

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	1	3
Sodium	ppm	ASTM D5185m	<b>1</b>	0	5
Potassium	ppm	ASTM D5185m >20	<b>38</b>	6	17

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.5</b>	0.2	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.5</b>	5.7	8.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.7</b>	17.9	19.3


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.2</b>	13.7	15.6
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>7.7</b>	8.9	8.5




# OIL ANALYSIS REPORT


▲ Aluminum (ppm)

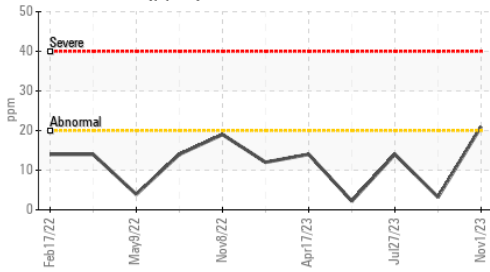

Base Number

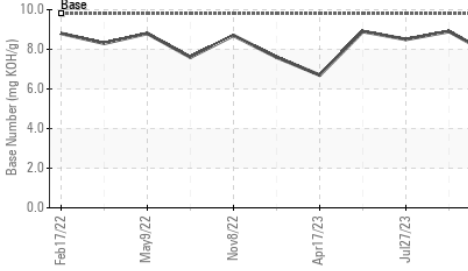

Viscosity @ 100°C

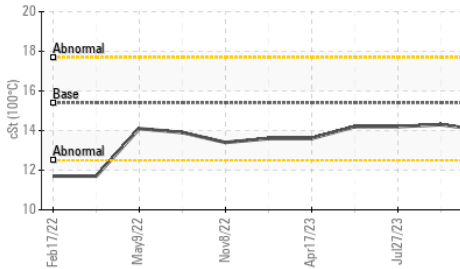


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.0</b>	14.3	14.2

## GRAPHS


Ferrous Alloys

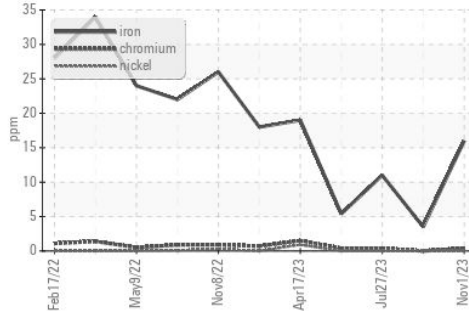


Non-ferrous Metals

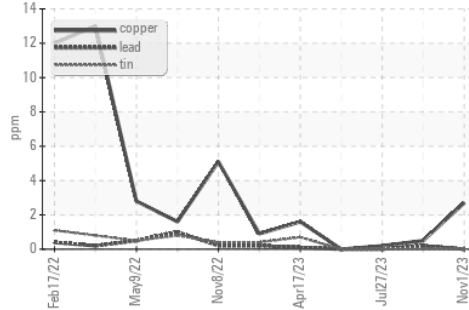

Viscosity @ 100°C

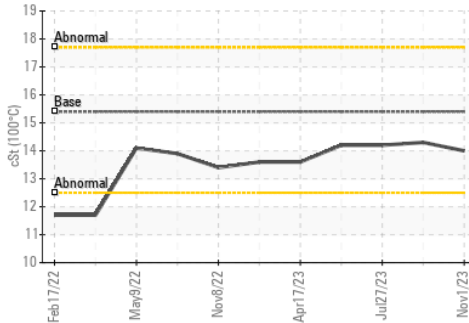

Base Number

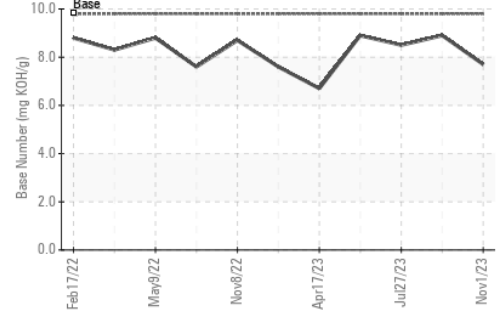

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0094668 **Received** : 02 Nov 2023  
**Lab Number** : **05996458** **Diagnosed** : 03 Nov 2023  
**Unique Number** : 10724818 **Diagnostician** : Sean Felton  
**Test Package** : FLEET

**GFL Environmental - 001 - Raleigh(CNG)**  
 3741 Conquest Drive  
 Garner, NC  
 US 27529  
 Contact: Craig Johnson  
 craig.johnson@gflenv.com  
 T: (919)662-7100  
 F: (919)662-7130

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)