




# OIL ANALYSIS REPORT

Sample Rating Trend

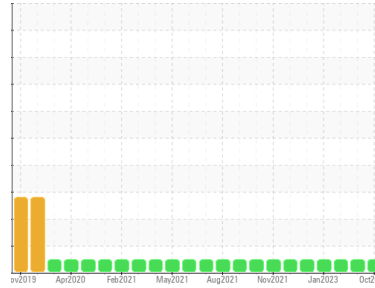

**NORMAL**



Machine Id

**2862**

Component

**Diesel Engine**

Fluid

**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0092707</b>	GFL0072403	GFL0072415
Sample Date	Client Info		<b>30 Oct 2023</b>	14 Jun 2023	18 May 2023
Machine Age	hrs	Client Info	<b>11420</b>	11420	0
Oil Age	hrs	Client Info	<b>635</b>	676	0
Oil Changed	Client Info		<b>Changed</b>	Changed	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >110	<b>36</b>	55	11
Chromium	ppm	ASTM D5185m >4	<b>2</b>	3	<1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >25	<b>5</b>	10	3
Lead	ppm	ASTM D5185m >45	<b>8</b>	24	<1
Copper	ppm	ASTM D5185m >85	<b>3</b>	5	<1
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	2	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>3</b>	5	6
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>66</b>	64	58
Manganese	ppm	ASTM D5185m 0	<b>0</b>	2	<1
Magnesium	ppm	ASTM D5185m 1010	<b>936</b>	1067	906
Calcium	ppm	ASTM D5185m 1070	<b>1179</b>	1227	1252
Phosphorus	ppm	ASTM D5185m 1150	<b>1012</b>	1108	1006
Zinc	ppm	ASTM D5185m 1270	<b>1258</b>	1443	1227
Sulfur	ppm	ASTM D5185m 2060	<b>3038</b>	3351	3443

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	<b>9</b>	10	8
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	9	4
Potassium	ppm	ASTM D5185m >20	<b>9</b>	11	2

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.7</b>	1.1	0.7
Nitration	Abs/cm	*ASTM D7624 >20	<b>11.3</b>	13.9	7.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>23.0</b>	28.2	19.7

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>20.0</b>	28.8	14.4
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>6.7</b>	4.3	8.6







# OIL ANALYSIS REPORT

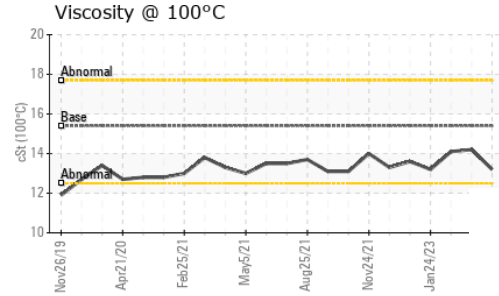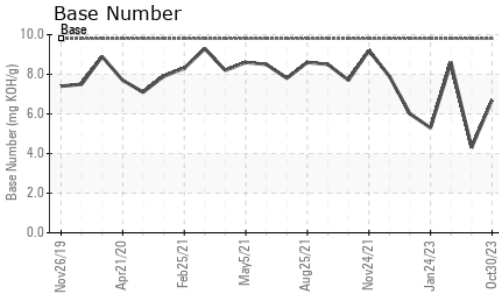

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.2</b>	14.2	14.1

## GRAPHS

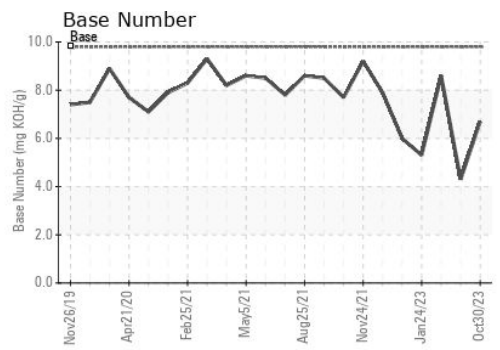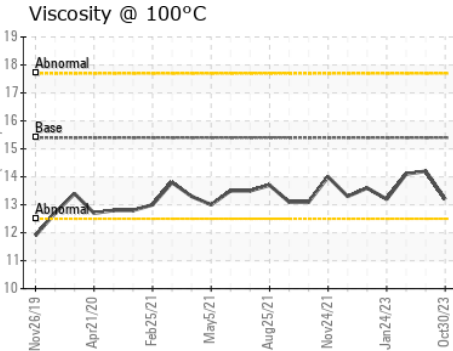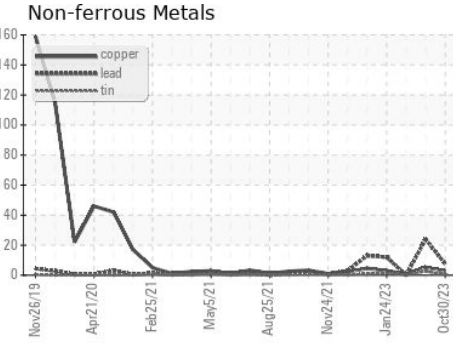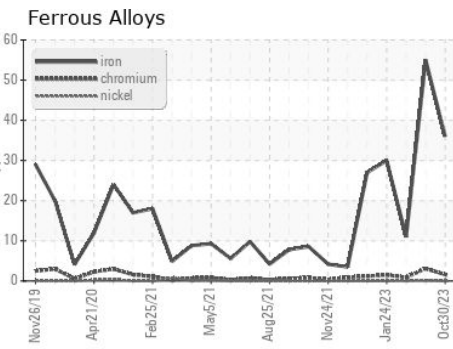

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0092707  
**Lab Number** : 05996513  
**Unique Number** : 10724873  
**Test Package** : FLEET

**GFL Environmental - 005 - Wilson/Tri-East (CNG)**  
 2810 Contentnea Road S  
 Wilson, NC  
 US 27893-8501  
 Contact: SPENCER LIGGON  
 spencer.liggon@gflenv.com  
 T: (800)207-6618  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)