


OIL ANALYSIS REPORT

Sample Rating Trend

FUEL


Area
G.LOPES CONSTRUCTION INC./ON-ROAD
 Machine Id
PU307
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

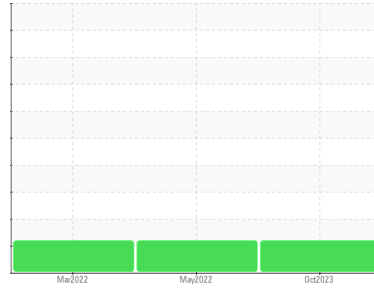

DIAGNOSIS

Recommendation

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0109817	PCA0072331	PCA0066480
Sample Date	Client Info			31 Oct 2023	31 May 2022	01 Mar 2022
Machine Age	hrs	Client Info		29000	19000	13000
Oil Age	hrs	Client Info		29000	19000	13000
Oil Changed	Client Info			N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	44	24	52
Chromium	ppm	ASTM D5185m	>20	3	2	4
Nickel	ppm	ASTM D5185m	>4	0	0	<1
Titanium	ppm	ASTM D5185m		0	<1	1
Silver	ppm	ASTM D5185m	>3	0	<1	3
Aluminum	ppm	ASTM D5185m	>20	2	2	4
Lead	ppm	ASTM D5185m	>40	0	<1	<1
Copper	ppm	ASTM D5185m	>330	5	6	19
Tin	ppm	ASTM D5185m	>15	0	<1	<1
Antimony	ppm	ASTM D5185m		---	---	<1
Vanadium	ppm	ASTM D5185m		0	0	<1
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	8	4	24
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	60	51	49	1
Manganese	ppm	ASTM D5185m	0	1	1	3
Magnesium	ppm	ASTM D5185m	1010	849	877	711
Calcium	ppm	ASTM D5185m	1070	1148	1150	1317
Phosphorus	ppm	ASTM D5185m	1150	900	974	1068
Zinc	ppm	ASTM D5185m	1270	1226	1191	1270
Sulfur	ppm	ASTM D5185m	2060	2922	3633	3111


CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	10	6	11
Sodium	ppm	ASTM D5185m		<1	1	5
Potassium	ppm	ASTM D5185m	>20	<1	<1	4
Fuel	%	ASTM D3524	>5	▲ 6.4	▲ 6.0	▲ 7.7

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.4	0.3	0.4
Nitration	Abs/cm	*ASTM D7624	>20	11.6	10.2	10.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.2	21.1	24.3


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.3	18.4	16.7
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	9.99	8.82	4.58

OIL ANALYSIS REPORT


▲ Fuel Dilution

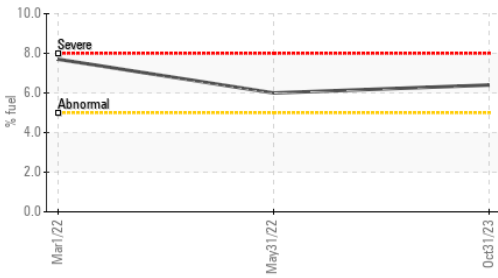

▲ Viscosity @ 100°C

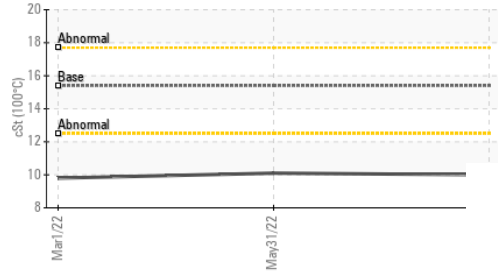









Base Number

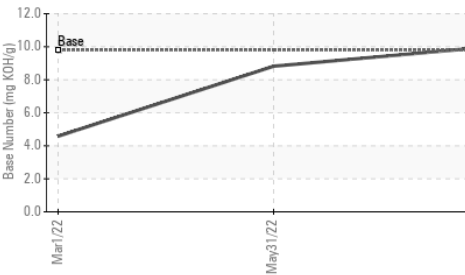

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4 ▲ 10.0	▲ 10.1	▲ 9.8

GRAPHS

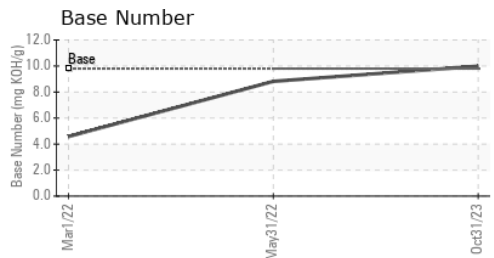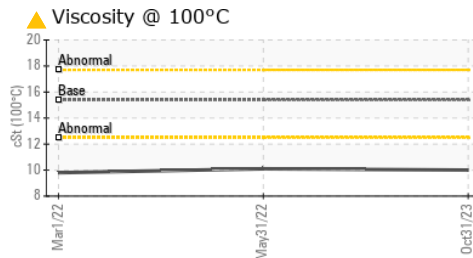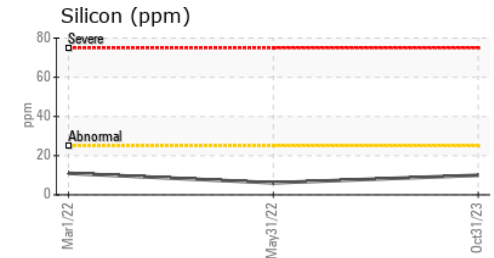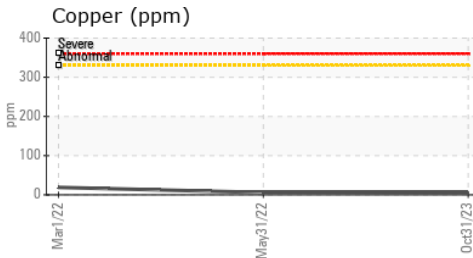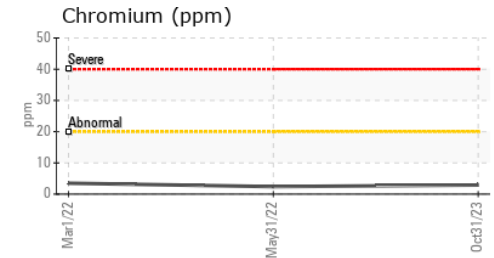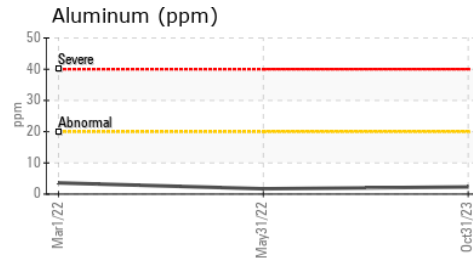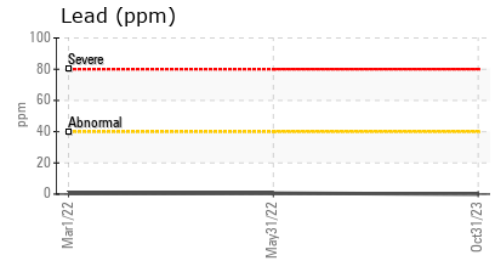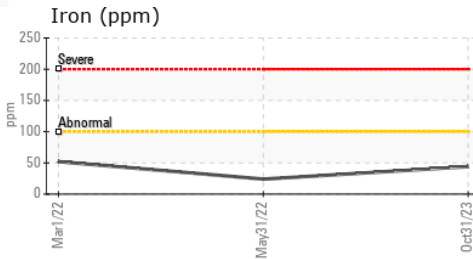

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0109817 **Received** : 02 Nov 2023
Lab Number : 05996861 **Diagnosed** : 06 Nov 2023
Unique Number : 10725221 **Diagnostician** : Wes Davis
Test Package : MOB 2 (Additional Tests: PercentFuel)

G LOPES CONSTRUCTION
 565 WINTHROP ST
 TAUNTON, MA
 US 02780
 Contact: BUTCH MCGRATH
 bmcgrath@glopes.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: