


# OIL ANALYSIS REPORT

## Sample Rating Trend

**NORMAL**



Area  
**G.LOPES CONSTRUCTION INC./On-Road**  
 Machine Id  
**331**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

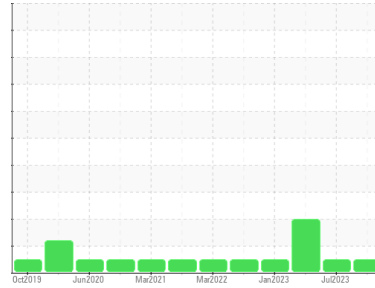

## DIAGNOSIS

**Recommendation**  
 Resample at the next service interval to monitor.

**Wear**  
 All component wear rates are normal.

**Contamination**  
 There is no indication of any contamination in the oil.

**Fluid Condition**  
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>PCA0109809</b>	PCA0098462	PCA0090789	
Sample Date	Client Info	<b>31 Oct 2023</b>	26 Jul 2023	02 May 2023	
Machine Age	mls	Client Info	<b>272000</b>	252000	232000
Oil Age	mls	Client Info	<b>132000</b>	132000	132000
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A	
Sample Status		<b>NORMAL</b>	NORMAL	SEVERE	

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >65	<b>14</b>	18	20
Chromium	ppm ASTM D5185m >5	<b>&lt;1</b>	<1	1
Nickel	ppm ASTM D5185m >3	<b>0</b>	0	0
Titanium	ppm ASTM D5185m >5	<b>0</b>	1	<1
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >35	<b>6</b>	5	3
Lead	ppm ASTM D5185m >10	<b>0</b>	0	0
Copper	ppm ASTM D5185m >180	<b>3</b>	4	5
Tin	ppm ASTM D5185m >8	<b>0</b>	0	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>6</b>	2	<1
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>59</b>	62	60
Manganese	ppm ASTM D5185m 0	<b>0</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>921</b>	1003	956
Calcium	ppm ASTM D5185m 1070	<b>1128</b>	1143	1056
Phosphorus	ppm ASTM D5185m 1150	<b>943</b>	1022	974
Zinc	ppm ASTM D5185m 1270	<b>1288</b>	1294	1273
Sulfur	ppm ASTM D5185m 2060	<b>2850</b>	3363	2723

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >15	<b>5</b>	5	4
Sodium	ppm ASTM D5185m	<b>&lt;1</b>	2	3
Potassium	ppm ASTM D5185m >20	<b>4</b>	3	3



## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.8</b>	0.4	5.3
Nitration	Abs/cm *ASTM D7624 >20	<b>9.6</b>	6.4	16.7
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>22.1</b>	18.3	30.4

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>17.4</b>	13.9	23.9
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.33</b>	8.19	7.92









# OIL ANALYSIS REPORT

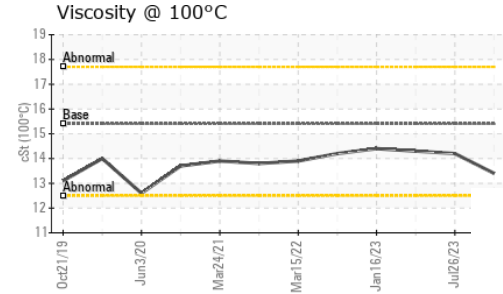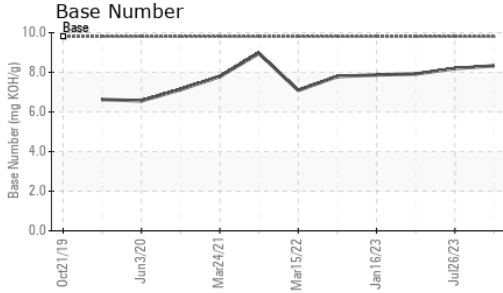

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.4</b>	14.2	14.3

## GRAPHS

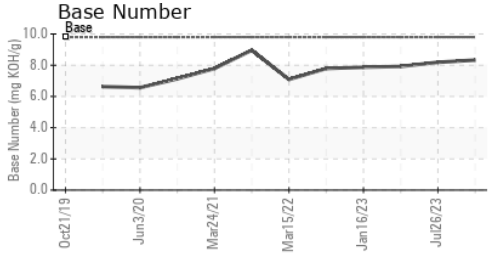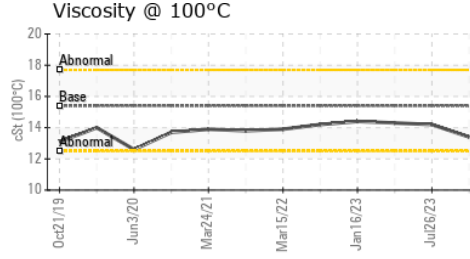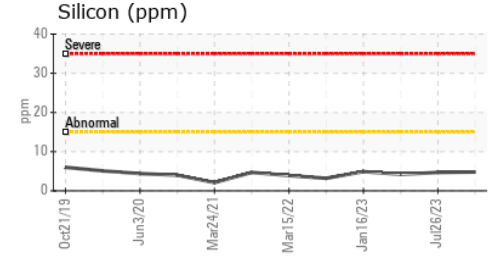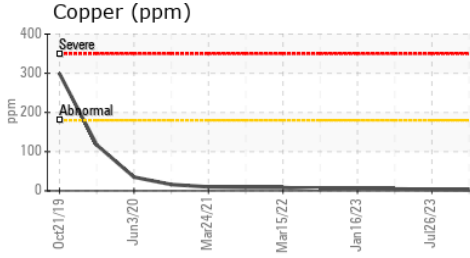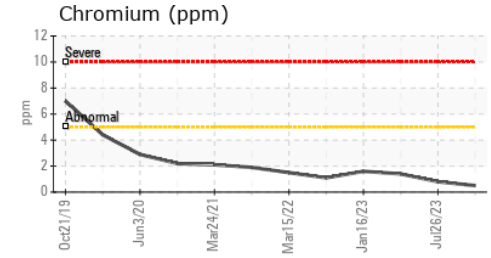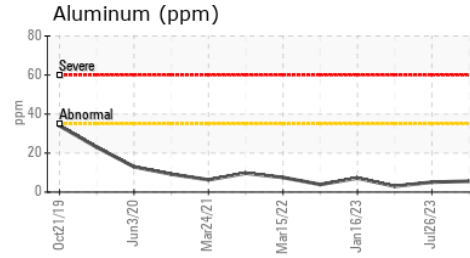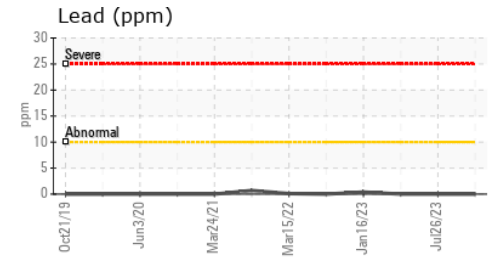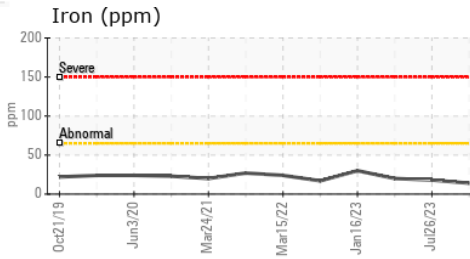

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0109809 **Received** : 02 Nov 2023  
**Lab Number** : **05996862** **Diagnosed** : 03 Nov 2023  
**Unique Number** : 10725222 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

**G LOPES CONSTRUCTION**  
 565 WINTHROP ST  
 TAUNTON, MA  
 US 02780  
 Contact: BUTCH MCGRATH  
 bmcgrath@glopes.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: