


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

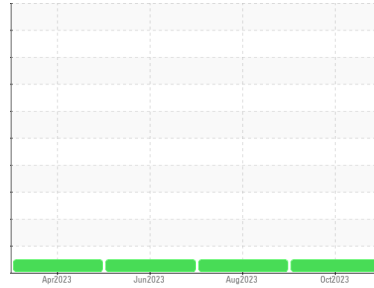

Area  
**(AW683N) Supermarket - Tractor**  
Machine Id  
**PETERBILT 107A3673**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0104076</b>	PCA0104117	PCA0099853
Sample Date	Client Info		<b>25 Oct 2023</b>	15 Aug 2023	08 Jun 2023
Machine Age	mls	Client Info	<b>222028</b>	200467	178791
Oil Age	mls	Client Info	<b>21561</b>	21676	19196
Oil Changed	Client Info		<b>Changed</b>	Changed	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >110	<b>23</b>	26	16
Chromium	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185m >25	<b>6</b>	6	<1
Lead	ppm	ASTM D5185m >45	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m >85	<b>3</b>	3	2
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>11</b>	4	5
Barium	ppm	ASTM D5185m 0	<b>4</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>70</b>	69	67
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 950	<b>879</b>	992	971
Calcium	ppm	ASTM D5185m 1050	<b>1156</b>	1181	1157
Phosphorus	ppm	ASTM D5185m 995	<b>1000</b>	1017	1004
Zinc	ppm	ASTM D5185m 1180	<b>1243</b>	1251	1234
Sulfur	ppm	ASTM D5185m 2600	<b>2915</b>	3010	3255

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >30	<b>9</b>	7	6
Sodium	ppm	ASTM D5185m	<b>0</b>	2	2
Potassium	ppm	ASTM D5185m >20	<b>13</b>	11	4



### INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.7</b>	0.9	0.6
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.5</b>	10.7	9.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.5</b>	23.8	21.1

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>17.5</b>	20.3	17.0
Base Number (BN)	mg KOH/g	ASTM D2896	<b>7.0</b>	5.6	7.7





# OIL ANALYSIS REPORT

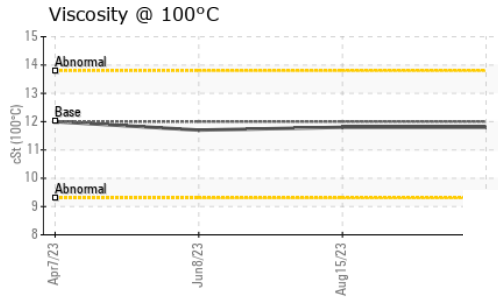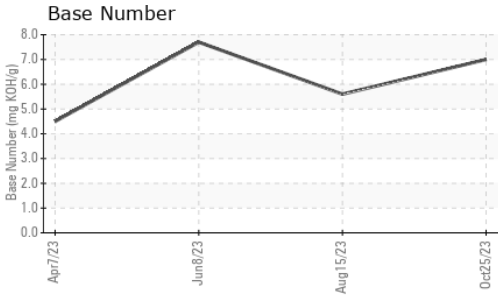

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.8</b>	11.8	11.7

## GRAPHS

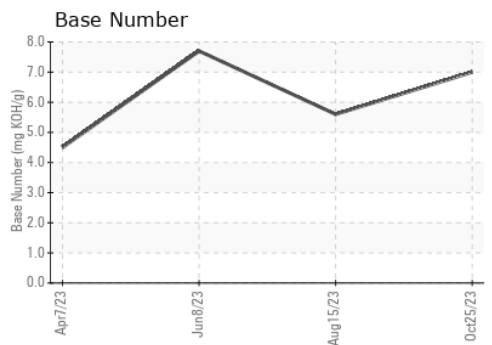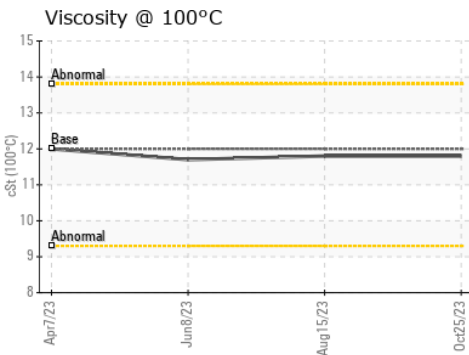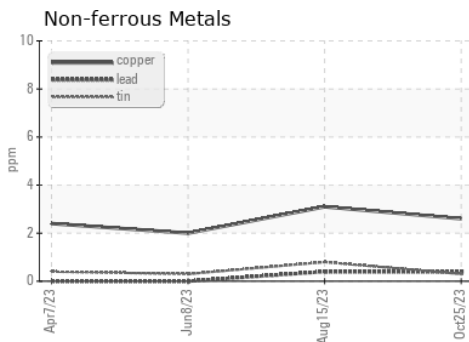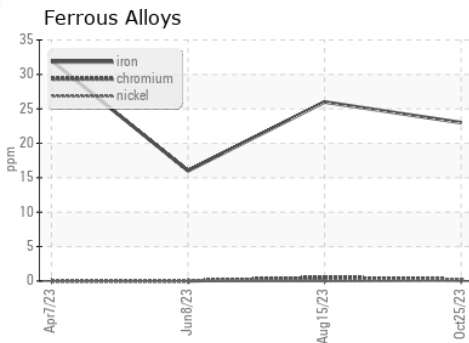

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0104076 **Received** : 03 Nov 2023  
**Lab Number** : **05997612** **Diagnosed** : 06 Nov 2023  
**Unique Number** : 10725972 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**Transervice - Shop 1071 - Supermarket-Dayton**  
 60 A Tower Road  
 Dayton, NJ  
 US 08810  
 Contact: Brian Quinn  
 bquinn@transervice.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: