




# OIL ANALYSIS REPORT

Sample Rating Trend

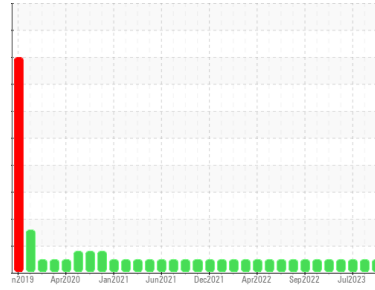

**NORMAL**



Machine Id  
**2831 PETERBILT 567**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (48 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0094666</b>	GFL0089271	GFL0087124
Sample Date	Client Info		<b>02 Nov 2023</b>	30 Aug 2023	17 Jul 2023
Machine Age	hrs	Client Info	<b>13027</b>	12447	11981
Oil Age	hrs	Client Info	<b>580</b>	1043	577
Oil Changed	Client Info		<b>Changed</b>	Changed	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >165	<b>8</b>	7	9
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>1</b>	<1	2
Lead	ppm	ASTM D5185m >150	<b>&lt;1</b>	0	2
Copper	ppm	ASTM D5185m >90	<b>1</b>	4	2
Tin	ppm	ASTM D5185m >5	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>3</b>	0	2
Barium	ppm	ASTM D5185m 0	<b>4</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>58</b>	62	66
Manganese	ppm	ASTM D5185m 0	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>844</b>	988	1068
Calcium	ppm	ASTM D5185m 1070	<b>1067</b>	1137	1194
Phosphorus	ppm	ASTM D5185m 1150	<b>855</b>	1046	1152
Zinc	ppm	ASTM D5185m 1270	<b>1149</b>	1307	1384
Sulfur	ppm	ASTM D5185m 2060	<b>3046</b>	3699	3884

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >35	<b>10</b>	12	25
Sodium	ppm	ASTM D5185m	<b>1</b>	4	5
Potassium	ppm	ASTM D5185m >20	<b>2</b>	1	3

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >7.5	<b>0.4</b>	0.3	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.5</b>	7.9	8.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.2</b>	19.5	20.0

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.6</b>	15.5	16.1
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.0</b>	7.9	8.2







# OIL ANALYSIS REPORT

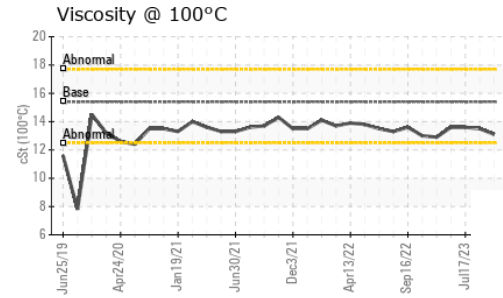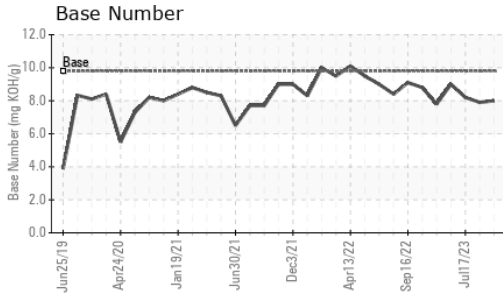

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.1</b>	13.5	13.6

## GRAPHS

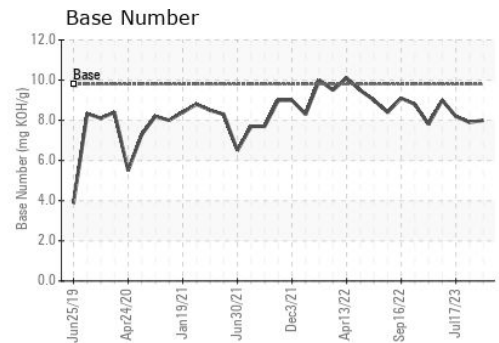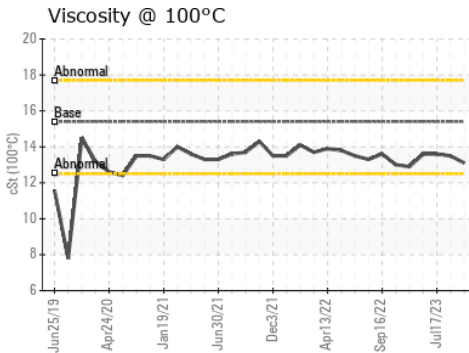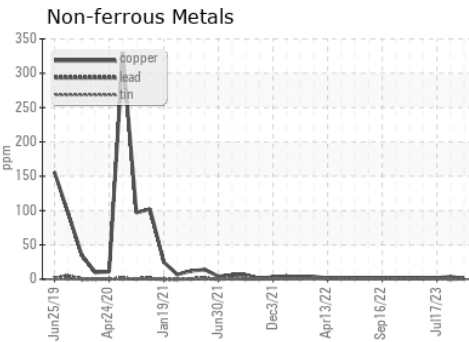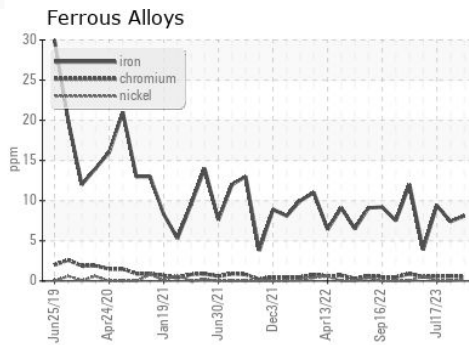

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0094666 **Received** : 03 Nov 2023  
**Lab Number** : **05997637** **Diagnosed** : 06 Nov 2023  
**Unique Number** : 10725997 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 001 - Raleigh(CNG)**  
 3741 Conquest Drive  
 Garner, NC  
 US 27529  
 Contact: Craig Johnson  
 craig.johnson@gflenv.com  
 T: (919)662-7100  
 F: (919)662-7130

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)