




# PROBLEM SUMMARY

Sample Rating Trend

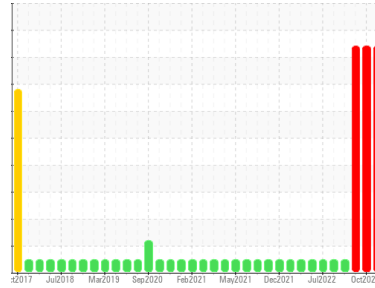

GLYCOL




Machine Id  
**3762C**

Component  
**Natural Gas Engine**

Fluid  
**PETRO CANADA DURON GEO LD 15W40 (30 QTS)**

## COMPONENT CONDITION SUMMARY

### Glycol Contamination

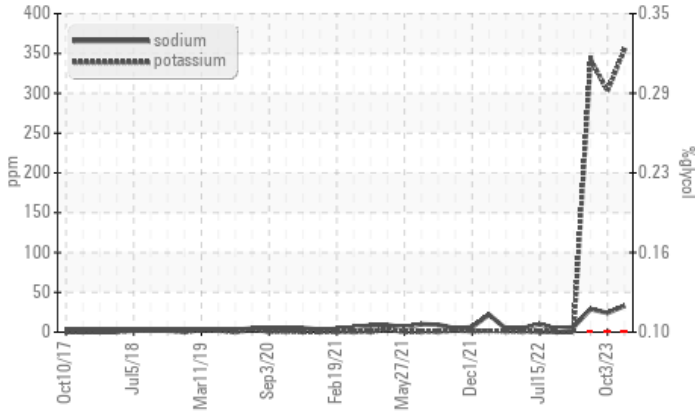

## RECOMMENDATION

We advise that you check for the source of the coolant leak. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

## PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	SEVERE	SEVERE
Sodium	ppm	ASTM D5185m		▲ 33	▲ 24	▲ 29
Potassium	ppm	ASTM D5185m	>20	▲ 355	▲ 303	▲ 343
Glycol	%	*ASTM D2982		● 0.10	● 0.10	● 0.10

Customer Id: GFL030  
Sample No.: GFL0090100  
Lab Number: 05997764  
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Don Baldrige +1  
[don.b505@comcast.net](mailto:don.b505@comcast.net)

To change component or sample information:  
Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Glycol Access	---	---	?	We advise that you check for the source of the coolant leak.

## HISTORICAL DIAGNOSIS

### 03 Oct 2023 Diag: Doug Bogart

#### GLYCOL



We advise that you check for the source of the coolant leak. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. Test for glycol is positive. Sodium and/or potassium levels are high. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

[view report](#)



### 21 Sep 2023 Diag: Don Baldrige

#### GLYCOL



We advise that you check for the source of the coolant leak. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. Sodium and/or potassium levels are high. There is a high concentration of glycol present in the oil. The oil is no longer serviceable due to the presence of contaminants.

[view report](#)



### 26 Jan 2023 Diag: Don Baldrige

#### NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


[view report](#)





# OIL ANALYSIS REPORT

Sample Rating Trend

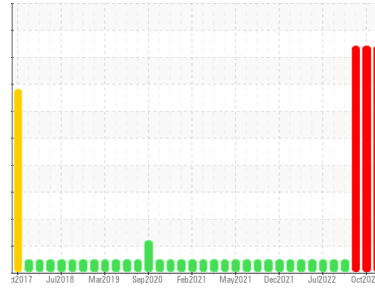

GLYCOL



Machine Id  
**3762C**

Component  
**Natural Gas Engine**

Fluid  
**PETRO CANADA DURON GEO LD 15W40 (30 QTS)**

## DIAGNOSIS

### Recommendation

We advise that you check for the source of the coolant leak. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

Sodium and/or potassium levels are high. There is a high concentration of glycol present in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0090100</b>	GFL0090113	GFL0081017
Sample Date	Client Info		<b>27 Oct 2023</b>	03 Oct 2023	21 Sep 2023
Machine Age	hrs	Client Info	<b>16132</b>	15913	15913
Oil Age	hrs	Client Info	<b>600</b>	600	600
Oil Changed		Client Info	<b>Changed</b>	Changed	Changed
Sample Status			<b>SEVERE</b>	SEVERE	SEVERE

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>27</b>	14	37
Chromium	ppm	ASTM D5185m >4	<b>3</b>	2	5
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	2
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >9	<b>9</b>	6	10
Lead	ppm	ASTM D5185m >30	<b>3</b>	3	4
Copper	ppm	ASTM D5185m >35	<b>1</b>	<1	1
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 50	<b>4</b>	7	8
Barium	ppm	ASTM D5185m 5	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>52</b>	50	53
Manganese	ppm	ASTM D5185m 0	<b>2</b>	1	1
Magnesium	ppm	ASTM D5185m 560	<b>519</b>	613	555
Calcium	ppm	ASTM D5185m 1510	<b>1513</b>	1594	1595
Phosphorus	ppm	ASTM D5185m 780	<b>561</b>	754	769
Zinc	ppm	ASTM D5185m 870	<b>890</b>	1018	990
Sulfur	ppm	ASTM D5185m 2040	<b>2138</b>	2503	2632

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >+100	<b>12</b>	8	14
Sodium	ppm	ASTM D5185m	<b>▲ 33</b>	▲ 24	▲ 29
Potassium	ppm	ASTM D5185m >20	<b>▲ 355</b>	▲ 303	▲ 343
Glycol	%	*ASTM D2982	<b>● 0.10</b>	● 0.10	● 0.10

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0</b>	0	0
Nitration	Abs/cm	*ASTM D7624 >20	<b>11.9</b>	10.4	9.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>23.0</b>	20.5	19.8


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>19.9</b>	18.1	17.1
Base Number (BN)	mg KOH/g	ASTM D2896 10.2	<b>4.6</b>	6.2	6.5




# OIL ANALYSIS REPORT


## Glycol Contamination

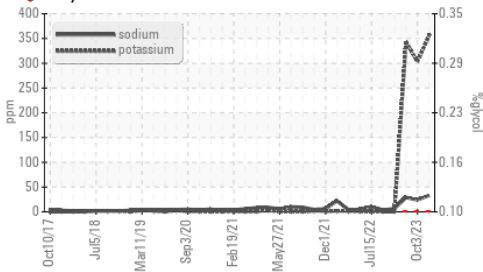

## Base Number

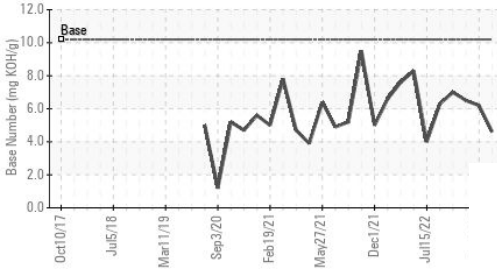

## Viscosity @ 100°C

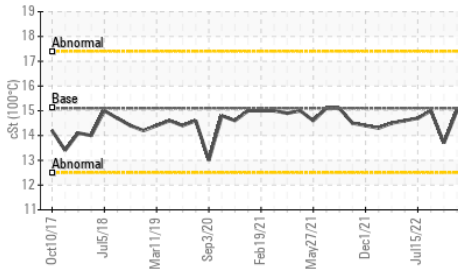

## VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

## FLUID PROPERTIES


	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	15.0	15.0

## GRAPHS


### Ferrous Alloys

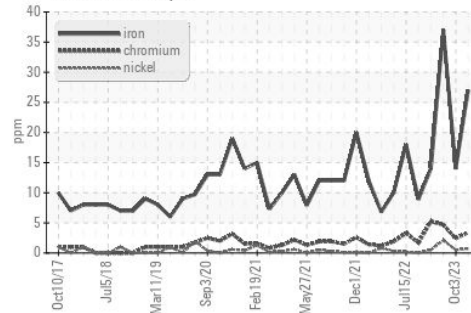


### Non-ferrous Metals

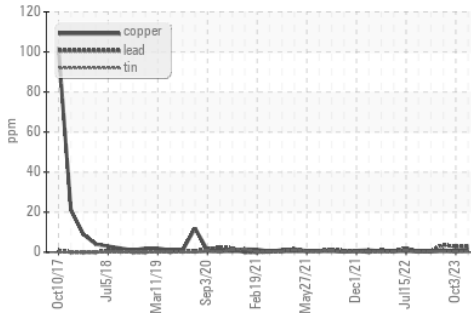

### Viscosity @ 100°C

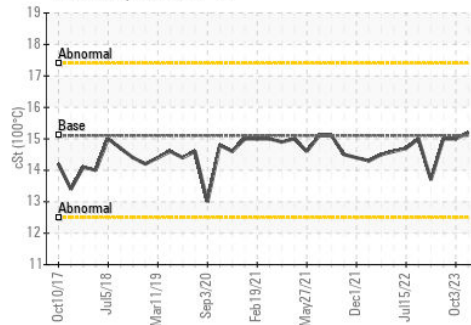

### Base Number

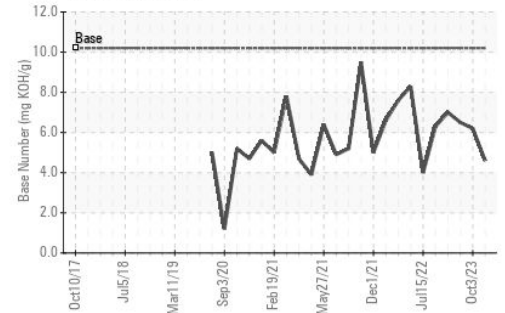

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0090100  
 Lab Number : 05997764  
 Unique Number : 10726124  
 Test Package : FLEET

Received : 03 Nov 2023  
 Diagnosed : 07 Nov 2023  
 Diagnostician : Don Baldrige

GFL Environmental - 030 - Conway Myrtle Beach  
 3010 HWY 378  
 Conway, SC  
 US 29527  
 Contact: CHET STROSCHINE  
 cstroschine@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: