




PROBLEM SUMMARY




Area
TALLASSEE
Machine Id
927049-162509
Component
Diesel Engine
Fluid
MOBIL DELVAC 1300 SUPER15W40 (--- LTR)

Sample Rating Trend

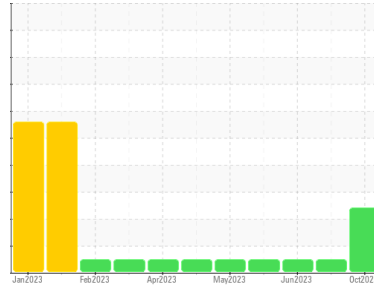


COMPONENT CONDITION SUMMARY

▲ Silicon (ppm)

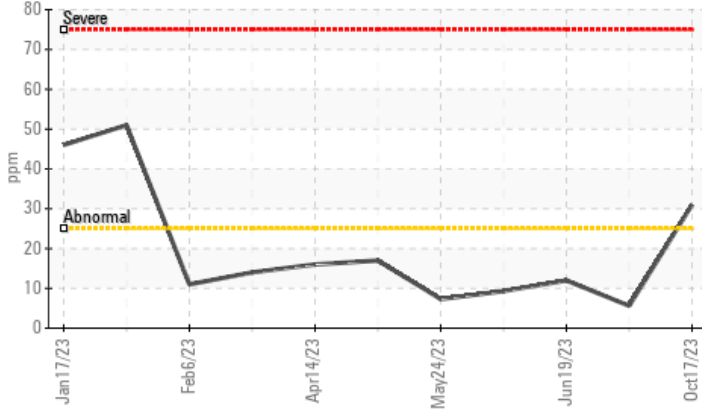

▲ Aluminum (ppm)

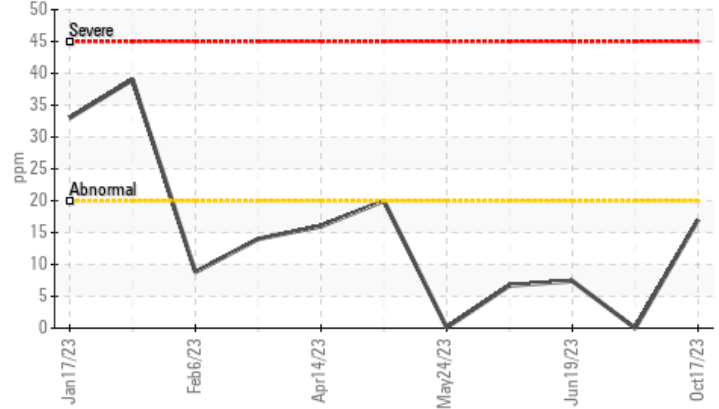

RECOMMENDATION

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

PROBLEMATIC TEST RESULTS

Sample Status				ABNORMAL	NORMAL	NORMAL
Aluminum	ppm	ASTM D5185m	>20	▲ 17	0	7
Silicon	ppm	ASTM D5185m	>25	▲ 31	6	12

Customer Id: GFL172
Sample No.: GFL0092426
Lab Number: 05998358
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
Don Baldrige +1
don.b505@comcast.net

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Change Fluid	---	---	?	Oil and filter change at the time of sampling has been noted.
Change Filter	---	---	?	Oil and filter change at the time of sampling has been noted.
Check Dirt Access	---	---	?	We advise that you check the air filter, air induction system, and any areas where dirt may enter the component.

HISTORICAL DIAGNOSIS

22 Aug 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



19 Jun 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



14 Jun 2023 Diag: Wes Davis

NORMAL



Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

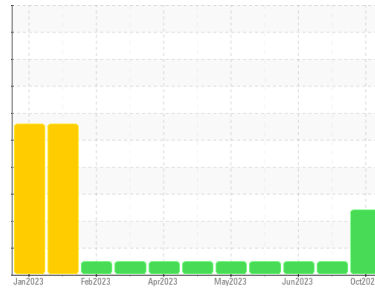

DIRT



Area
TALLASSEE
Machine Id
927049-162509

Component
Diesel Engine
Fluid
MOBIL DELVAC 1300 SUPER15W40 (--- LTR)



DIAGNOSIS

▲ Recommendation

We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

▲ Wear

All component wear rates are normal.

▲ Contamination

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0092426	GFL0086022	GFL0078418
Sample Date	Client Info	17 Oct 2023	22 Aug 2023	19 Jun 2023
Machine Age	mls	318192	17357	16948
Oil Age	mls	0	409	270
Oil Changed	Client Info	Changed	N/A	Changed
Sample Status		ABNORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<1.0	<1.0	<1.0
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	49	2	17
Chromium	ppm ASTM D5185m >20	<1	0	<1
Nickel	ppm ASTM D5185m >5	2	0	1
Titanium	ppm ASTM D5185m >2	<1	0	<1
Silver	ppm ASTM D5185m >2	0	0	0
Aluminum	ppm ASTM D5185m >20	▲ 17	0	7
Lead	ppm ASTM D5185m >40	2	0	0
Copper	ppm ASTM D5185m >330	3	0	<1
Tin	ppm ASTM D5185m >15	1	0	0
Vanadium	ppm ASTM D5185m	<1	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	12	50	29
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 0	62	60	61
Manganese	ppm ASTM D5185m	1	0	<1
Magnesium	ppm ASTM D5185m 0	891	968	888
Calcium	ppm ASTM D5185m	1089	1211	1145
Phosphorus	ppm ASTM D5185m	952	989	961
Zinc	ppm ASTM D5185m	1224	1252	1156
Sulfur	ppm ASTM D5185m	3104	3855	3600

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	▲ 31	6	12
Sodium	ppm ASTM D5185m	29	1	10
Potassium	ppm ASTM D5185m >20	7	2	2

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	1.2	0.1	0.3
Nitration	Abs/cm *ASTM D7624 >20	9.7	5.2	7.3
Sulfation	Abs/.1mm *ASTM D7415 >30	21.6	17.3	19.0


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	15.5	12.5	14.4
Base Number (BN)	mg KOH/g ASTM D2896 9.4	7.8	8.8	8.8




OIL ANALYSIS REPORT


▲ Silicon (ppm)

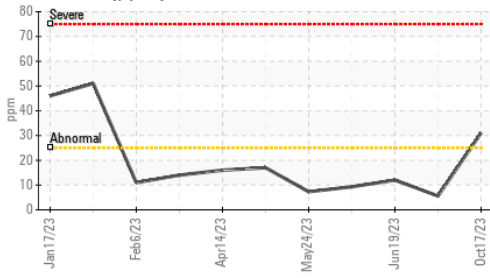


▲ Aluminum (ppm)

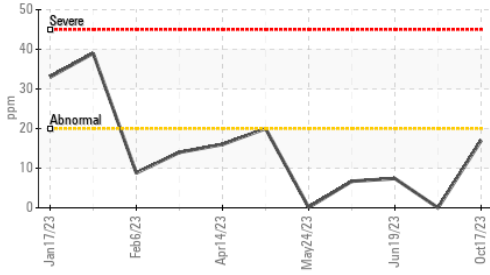

Base Number

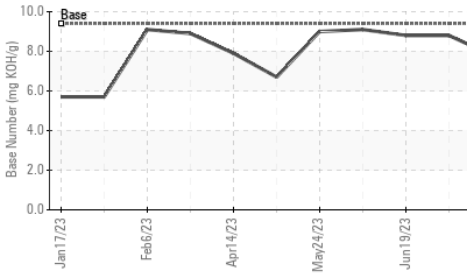

Viscosity @ 100°C

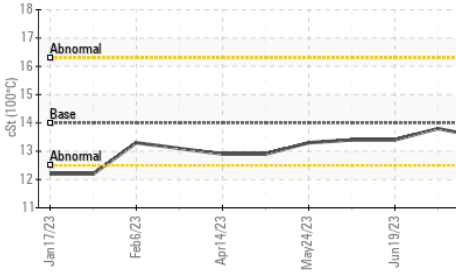

VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES


	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14	13.5	13.8

GRAPHS


Ferrous Alloys

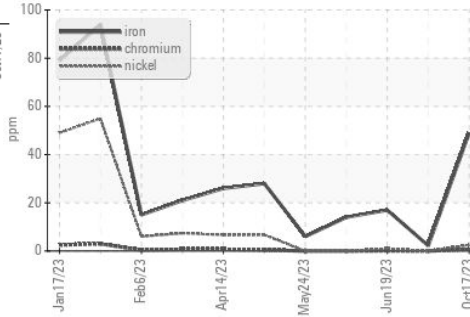


Non-ferrous Metals

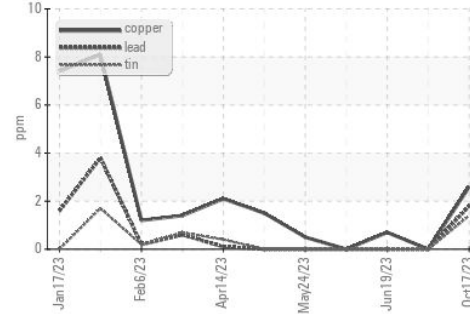

Viscosity @ 100°C

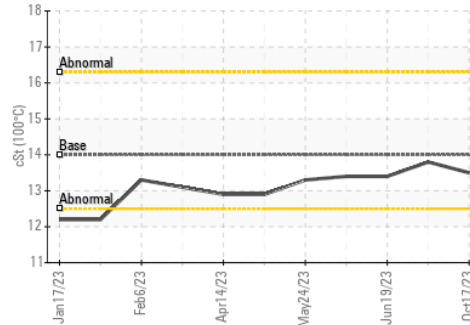

Base Number

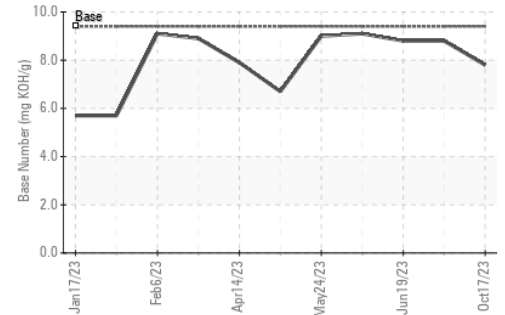

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0092426
 Lab Number : 05998358
 Unique Number : 10726718
 Test Package : FLEET

GFL Environmental - 172 - Montgomery-Alexander City-Tallahassee
 Multiple Sites
 Montgomery, AL
 US 36108
 Contact: RICHARD HATFIELD
 rhatfield@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: