


OIL ANALYSIS REPORT

Walgreens - Tractor [Walgreens - Tractor] 136A624128

Diesel Engine

PETRO CANADA DURON SHP 10W30 (11 GAL)

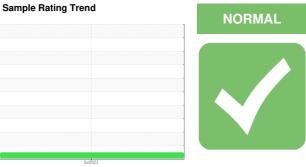

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. No other contaminants were detected in the oil.


Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

GAL)				Oct2023		
SAMPLE INFOR	RMATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0103703		
Sample Date		Client Info		11 Oct 2023		
Machine Age	mls	Client Info		27294		
Oil Age	mls	Client Info		27294		
Oil Changed		Client Info		Changed		
Sample Status				NORMAL		
CONTAMINA	TION	method	limit/base	current	history1	history2
Fuel	11011	WC Method	>2.0	<1.0		
Glycol		WC Method	>2.0	<1.0 NEG		
•		WC WElliou		NEG		
WEAR METAI	_S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	41		
Chromium	ppm	ASTM D5185m	>20	2		
Nickel	ppm	ASTM D5185m	>4	<1		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m	>3	<1		
Aluminum	ppm	ASTM D5185m	>20	32		
Lead	ppm	ASTM D5185m	>40	4		
Copper	ppm	ASTM D5185m	>330	19		
Tin	ppm	ASTM D5185m	>15	4		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	52		
Barium	ppm	ASTM D5185m	0	4		
Molybdenum	ppm	ASTM D5185m	50	61		
Manganese	ppm	ASTM D5185m	0	5		
Magnesium	ppm	ASTM D5185m	950	509		
Calcium	ppm	ASTM D5185m	1050	1633		
Phosphorus	ppm	ASTM D5185m	995	1015		
Zinc	ppm	ASTM D5185m	1180	1252		
Sulfur	ppm	ASTM D5185m	2600	2955		
CONTAMINA	NTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	38		
Sodium	ppm	ASTM D5185m		4		
Potassium	ppm	ASTM D5185m	>20	80		
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.2		
Nitration	Abs/cm	*ASTM D7624	>20	8.1		
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.0		
FLUID DEGRA	DATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.7		
Base Number (BN)	mg KOH/g			7.3		
. ,	0					



OIL ANALYSIS REPORT

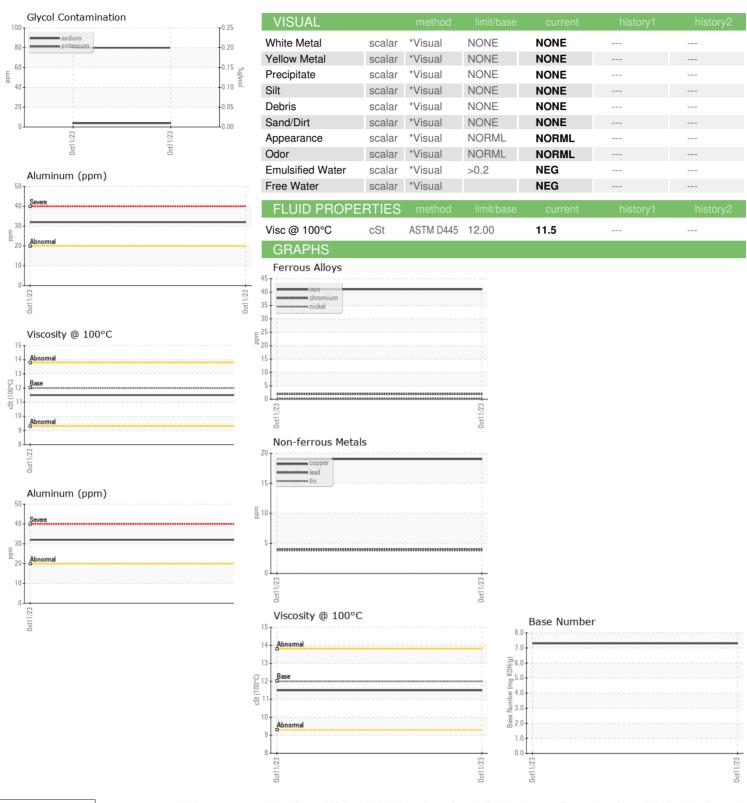





Laboratory Sample No. Lab Number Unique Number

: PCA0103703 : 05998595

: 10726955 Test Package : FLEET

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 06 Nov 2023 Diagnosed : 07 Nov 2023 Diagnostician

: Don Baldridge

Transervice - Shop 1365 - Berkeley-Nazareth 6813 Chrisphalt Drive Bath Borough, PA

US 18014 Contact: Stephen Mackes

smackes@transervice.com T: (610)837-8103

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (610)837-8105