


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

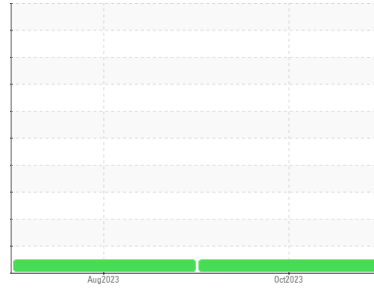

Area  
**(YXD6972) Walgreens - Tractor**  
Machine Id  
**[Walgreens - Tractor] 136G48468**  
Component  
**Gasoline Engine**  
Fluid  
**PETRO CANADA DURON SHP 10W30 (--- QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0103705</b>	PCA0093570	---
Sample Date	Client Info			<b>13 Oct 2023</b>	14 Aug 2023	---
Machine Age	mls Client Info			<b>212160</b>	211014	---
Oil Age	mls Client Info			<b>1000</b>	29601	---
Oil Changed	Client Info			<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method		>4.0	<b>&lt;1.0</b>	<1.0	---
Glycol	WC Method			<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>150	<b>6</b>	24	---
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m		<b>3</b>	5	---
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>40	<b>2</b>	3	---
Lead	ppm	ASTM D5185m	>50	<b>0</b>	<1	---
Copper	ppm	ASTM D5185m	>155	<b>2</b>	4	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>8</b>	7	---
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	50	<b>51</b>	52	---
Manganese	ppm	ASTM D5185m	0	<b>0</b>	<1	---
Magnesium	ppm	ASTM D5185m	950	<b>851</b>	804	---
Calcium	ppm	ASTM D5185m	1050	<b>1114</b>	1010	---
Phosphorus	ppm	ASTM D5185m	995	<b>999</b>	872	---
Zinc	ppm	ASTM D5185m	1180	<b>1210</b>	1143	---
Sulfur	ppm	ASTM D5185m	2600	<b>3097</b>	3430	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>30	<b>5</b>	7	---
Sodium	ppm	ASTM D5185m	>400	<b>&lt;1</b>	2	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	1	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		<b>0</b>	0.1	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.5</b>	10.2	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.8</b>	20.5	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.6</b>	16.6	---
Base Number (BN)	mg KOH/g	ASTM D2896		<b>8.2</b>	5.7	---





# OIL ANALYSIS REPORT

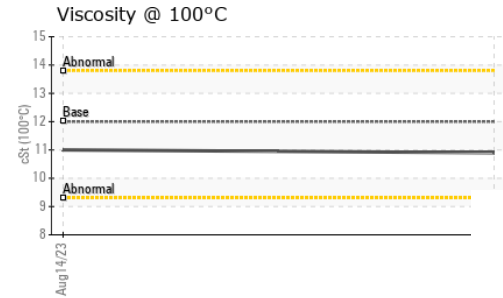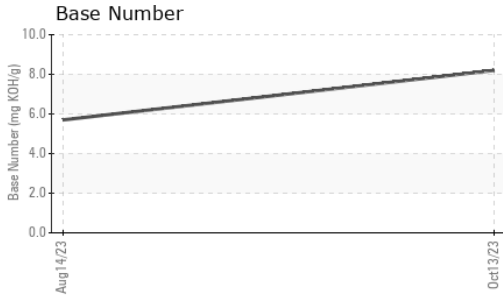

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>10.9</b>	11.0	---

## GRAPHS

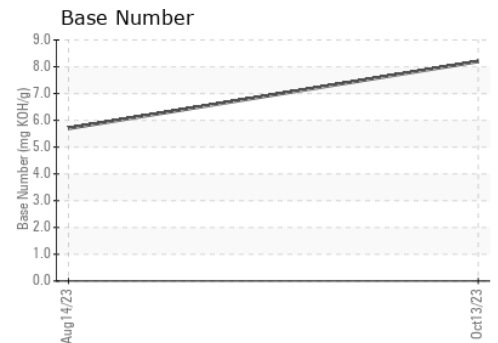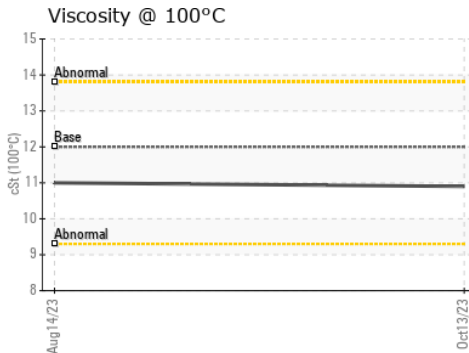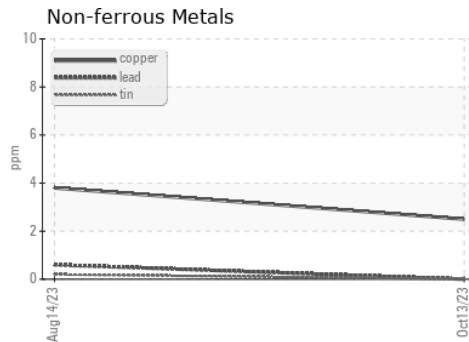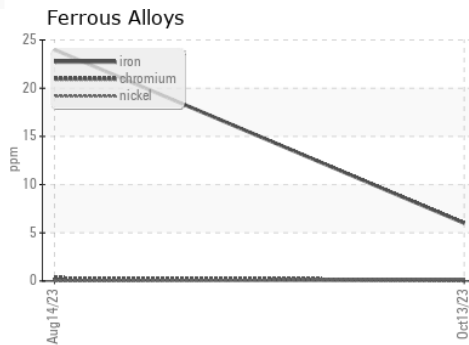

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0103705 **Received** : 06 Nov 2023  
**Lab Number** : **05998597** **Diagnosed** : 07 Nov 2023  
**Unique Number** : 10726957 **Diagnostician** : Don Baldrige  
**Test Package** : FLEET

**Transervice - Shop 1365 - Berkeley-Nazareth**  
 6813 Chrisphalt Drive  
 Bath Borough, PA  
 US 18014  
 Contact: Stephen Mackes  
 smackes@transervice.com  
 T: (610)837-8103  
 F: (610)837-8105

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)