




# PROBLEM SUMMARY

Sample Rating Trend


FUEL



Machine Id  
**727152**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

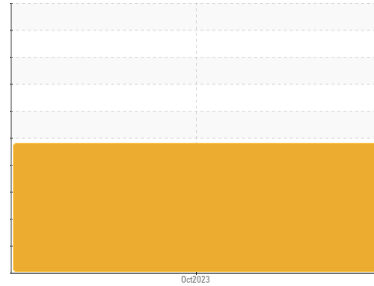

## COMPONENT CONDITION SUMMARY

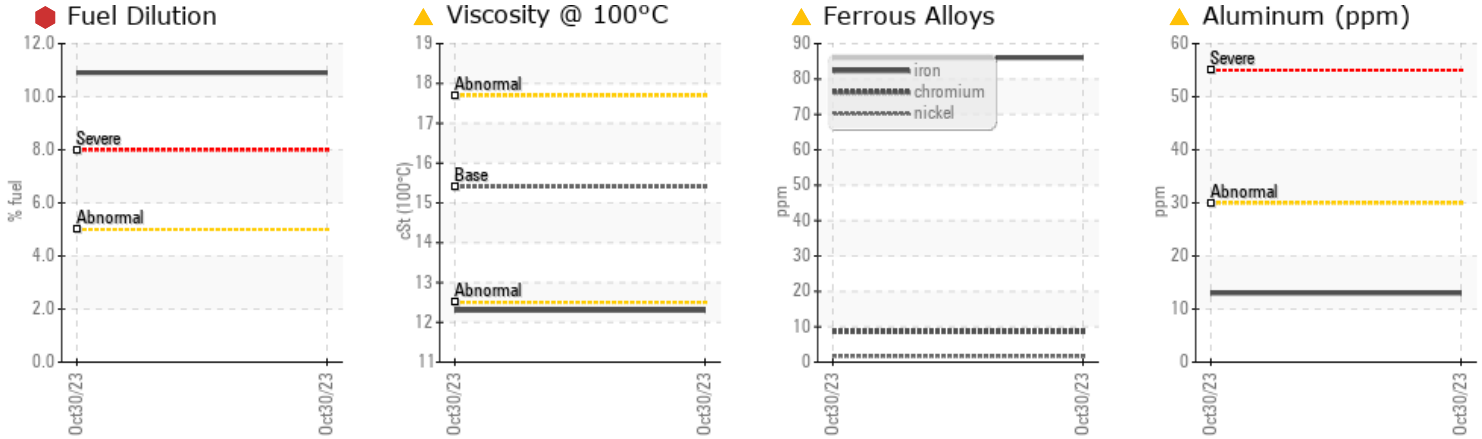

## RECOMMENDATION

We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

## PROBLEMATIC TEST RESULTS

| Sample Status                   | SEVERE        | --- | --- |
|---------------------------------|---------------|-----|-----|
| Iron ppm ASTM D5185m >80        | ▲ <b>86</b>   | --- | --- |
| Chromium ppm ASTM D5185m >5     | ▲ <b>9</b>    | --- | --- |
| Aluminum ppm ASTM D5185m >30    | ▲ <b>13</b>   | --- | --- |
| Fuel % ASTM D3524 >5            | ● <b>10.9</b> | --- | --- |
| Visc @ 100°C cSt ASTM D445 15.4 | ▲ <b>12.3</b> | --- | --- |

Customer Id: GFL960B  
Sample No.: GFL0087960  
Lab Number: 05998605  
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:  
Doug Bogart +1 (800)237-1369 x4016  
[dougb@wearcheckusa.com](mailto:dougb@wearcheckusa.com)

To change component or sample information:  
Customer Service +1 1-800-237-1369  
[customerservice@wearcheck.com](mailto:customerservice@wearcheck.com)

## RECOMMENDED ACTIONS

| Action                     | Status | Date | Done By | Description   |
|----------------------------|--------|------|---------|---|
| Change Fluid               | ---    | ---  | ?       | Oil and filter change at the time of sampling has been noted. |
| Change Filter              | ---    | ---  | ?       | Oil and filter change at the time of sampling has been noted. |
| Resample                   | ---    | ---  | ?       | We recommend an early resample to monitor this condition.     |
| Check Fuel/injector System | ---    | ---  | ?       | We advise that you check the fuel injection system.           |

## HISTORICAL DIAGNOSIS




# OIL ANALYSIS REPORT

Sample Rating Trend

FUEL



Machine Id  
**727152**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

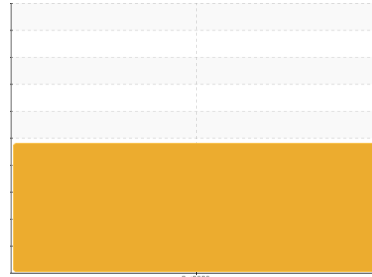

## DIAGNOSIS

### Recommendation

We advise that you check the fuel injection system. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

### Wear

Piston, ring and cylinder wear is indicated.

### Contamination

There is a high amount of fuel present in the oil.

### Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

## SAMPLE INFORMATION

| method        | limit/base  | current            | history1 | history2 |
|---------------|-------------|--------------------|----------|----------|
| Sample Number | Client Info | <b>GFL0087960</b>  | ---      | ---      |
| Sample Date   | Client Info | <b>30 Oct 2023</b> | ---      | ---      |
| Machine Age   | hrs         | <b>0</b>           | ---      | ---      |
| Oil Age       | hrs         | <b>600</b>         | ---      | ---      |
| Oil Changed   | Client Info | <b>Changed</b>     | ---      | ---      |
| Sample Status |             | <b>SEVERE</b>      | ---      | ---      |

## CONTAMINATION

| method | limit/base | current    | history1 | history2 |
|--------|------------|------------|----------|----------|
| Glycol | WC Method  | <b>NEG</b> | ---      | ---      |

## WEAR METALS

| method   | limit/base | current          | history1     | history2 |     |
|----------|------------|------------------|--------------|----------|-----|
| Iron     | ppm        | ASTM D5185m >80  | <b>▲ 86</b>  | ---      | --- |
| Chromium | ppm        | ASTM D5185m >5   | <b>▲ 9</b>   | ---      | --- |
| Nickel   | ppm        | ASTM D5185m >2   | <b>2</b>     | ---      | --- |
| Titanium | ppm        | ASTM D5185m      | <b>&lt;1</b> | ---      | --- |
| Silver   | ppm        | ASTM D5185m >3   | <b>0</b>     | ---      | --- |
| Aluminum | ppm        | ASTM D5185m >30  | <b>▲ 13</b>  | ---      | --- |
| Lead     | ppm        | ASTM D5185m >30  | <b>0</b>     | ---      | --- |
| Copper   | ppm        | ASTM D5185m >150 | <b>2</b>     | ---      | --- |
| Tin      | ppm        | ASTM D5185m >5   | <b>&lt;1</b> | ---      | --- |
| Vanadium | ppm        | ASTM D5185m      | <b>&lt;1</b> | ---      | --- |
| Cadmium  | ppm        | ASTM D5185m      | <b>0</b>     | ---      | --- |

## ADDITIVES

| method     | limit/base | current          | history1     | history2 |     |
|------------|------------|------------------|--------------|----------|-----|
| Boron      | ppm        | ASTM D5185m 0    | <b>6</b>     | ---      | --- |
| Barium     | ppm        | ASTM D5185m 0    | <b>0</b>     | ---      | --- |
| Molybdenum | ppm        | ASTM D5185m 60   | <b>51</b>    | ---      | --- |
| Manganese  | ppm        | ASTM D5185m 0    | <b>&lt;1</b> | ---      | --- |
| Magnesium  | ppm        | ASTM D5185m 1010 | <b>882</b>   | ---      | --- |
| Calcium    | ppm        | ASTM D5185m 1070 | <b>1005</b>  | ---      | --- |
| Phosphorus | ppm        | ASTM D5185m 1150 | <b>944</b>   | ---      | --- |
| Zinc       | ppm        | ASTM D5185m 1270 | <b>1154</b>  | ---      | --- |
| Sulfur     | ppm        | ASTM D5185m 2060 | <b>2745</b>  | ---      | --- |

## CONTAMINANTS

| method    | limit/base | current         | history1      | history2 |     |
|-----------|------------|-----------------|---------------|----------|-----|
| Silicon   | ppm        | ASTM D5185m >20 | <b>17</b>     | ---      | --- |
| Sodium    | ppm        | ASTM D5185m     | <b>7</b>      | ---      | --- |
| Potassium | ppm        | ASTM D5185m >20 | <b>23</b>     | ---      | --- |
| Fuel      | %          | ASTM D3524 >5   | <b>▲ 10.9</b> | ---      | --- |

## INFRA-RED






| method    | limit/base | current         | history1    | history2 |     |
|-----------|------------|-----------------|-------------|----------|-----|
| Soot %    | %          | *ASTM D7844 >3  | <b>0.6</b>  | ---      | --- |
| Nitration | Abs/cm     | *ASTM D7624 >20 | <b>11.1</b> | ---      | --- |
| Sulfation | Abs/.1mm   | *ASTM D7415 >30 | <b>21.7</b> | ---      | --- |

## FLUID DEGRADATION

| method           | limit/base | current         | history1    | history2 |     |
|------------------|------------|-----------------|-------------|----------|-----|
| Oxidation        | Abs/.1mm   | *ASTM D7414 >25 | <b>21.0</b> | ---      | --- |
| Base Number (BN) | mg KOH/g   | ASTM D2896 9.8  | <b>6.9</b>  | ---      | --- |







# OIL ANALYSIS REPORT

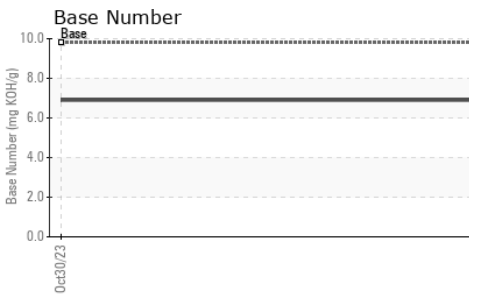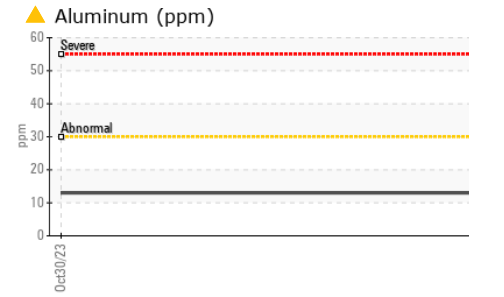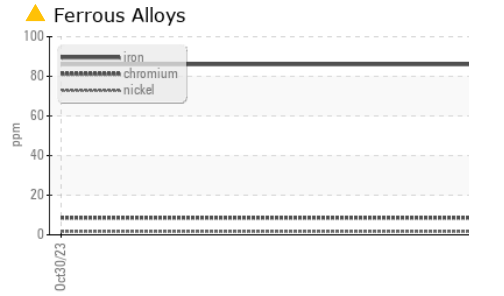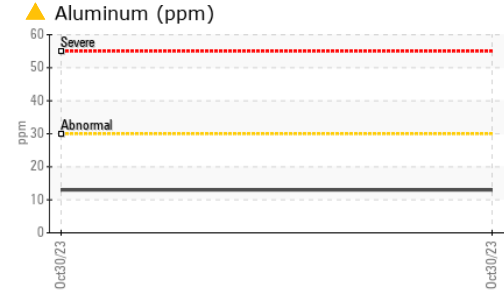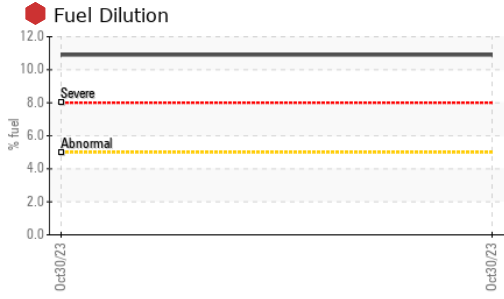

| VISUAL           | method | limit/base    | current      | history1 | history2 |
|------------------|--------|---------------|--------------|----------|----------|
| White Metal      | scalar | *Visual NONE  | <b>NONE</b>  | ---      | ---      |
| Yellow Metal     | scalar | *Visual NONE  | <b>NONE</b>  | ---      | ---      |
| Precipitate      | scalar | *Visual NONE  | <b>NONE</b>  | ---      | ---      |
| Silt             | scalar | *Visual NONE  | <b>NONE</b>  | ---      | ---      |
| Debris           | scalar | *Visual NONE  | <b>NONE</b>  | ---      | ---      |
| Sand/Dirt        | scalar | *Visual NONE  | <b>NONE</b>  | ---      | ---      |
| Appearance       | scalar | *Visual NORML | <b>NORML</b> | ---      | ---      |
| Odor             | scalar | *Visual NORML | <b>NORML</b> | ---      | ---      |
| Emulsified Water | scalar | *Visual >0.2  | <b>NEG</b>   | ---      | ---      |
| Free Water       | scalar | *Visual       | <b>NEG</b>   | ---      | ---      |

| FLUID PROPERTIES | method | limit/base     | current       | history1 | history2 |
|------------------|--------|----------------|---------------|----------|----------|
| Visc @ 100°C     | cSt    | ASTM D445 15.4 | <b>▲ 12.3</b> | ---      | ---      |

## GRAPHS

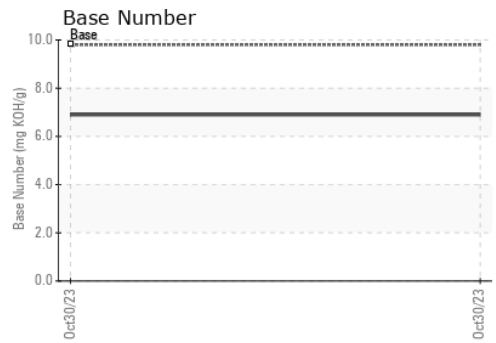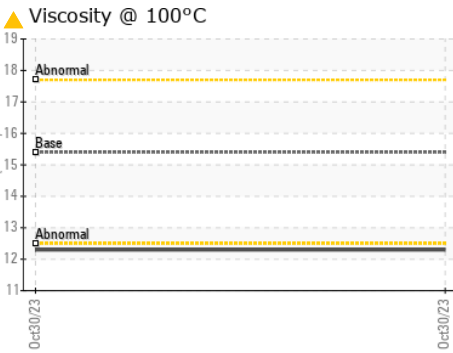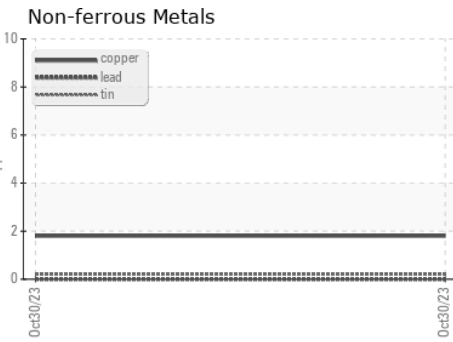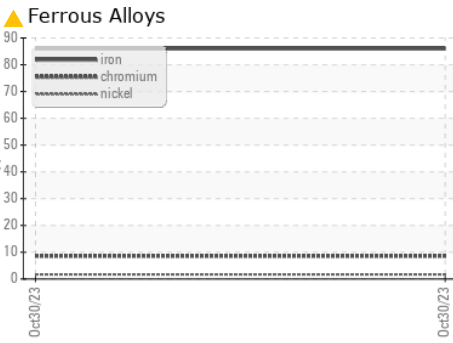

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0087960 **Received** : 06 Nov 2023  
**Lab Number** : **05998605** **Diagnosed** : 07 Nov 2023  
**Unique Number** : 10726965 **Diagnostician** : Doug Bogart  
**Test Package** : FLEET ( Additional Tests: FuelDilution, PercentFuel )

**GFL Environmental - 960B - Pittsfield HC**  
 1335 W. Washington  
 Pittsfield, IL  
 US 62363  
 Contact: David Bradshaw  
 david.bradshaw@gflenv.com

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)