


# **OIL ANALYSIS REPORT**

# Walgreens - Tractor [Walgreens - Tractor] 136A63426

**Diesel Engine** 

PETRO CANADA DURON SHP 10W30 (11 GAL)

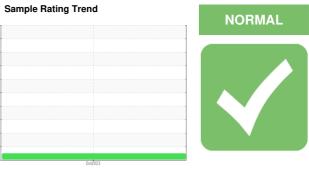

#### DIAGNOSIS

#### Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

#### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. No other contaminants were detected in the oil.


#### **Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

GAL)				Oct2023		
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0107384		
Sample Date		Client Info		20 Oct 2023		
Machine Age	mls	Client Info		40885		
Oil Age	mls	Client Info		40885		
Oil Changed		Client Info		Changed		
Sample Status				NORMAL		
CONTAMINAT	ION	method	limit/base	current	history1	history2
Fuel		WC Method	>2.0	<1.0		
Glycol		WC Method		NEG		
WEAR METAL	.S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	53		
Chromium		ASTM D5185m	>20	2		
Nickel	ppm	ASTM D5185m	>4	<1		
Titanium	ppm	ASTM D5185m	77	0		
Silver	ppm	ASTM D5185m	>3	<1		
Aluminum	ppm	ASTM D5185m	>20	25		
Lead		ASTM D5185m	>40	6		
	ppm			17		
Copper Tin	ppm	ASTM D5185m ASTM D5185m	>330	3		
Vanadium	ppm		>15			
Cadmium	ppm	ASTM D5185m ASTM D5185m		0		
	ppm					
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	41		
Barium	ppm	ASTM D5185m	0	5		
Molybdenum	ppm	ASTM D5185m	50	65		
Manganese	ppm		0	5		
Magnesium	ppm	ASTM D5185m	950	456		
Calcium	ppm	ASTM D5185m	1050	1757		
Phosphorus	ppm	ASTM D5185m	995	989		
Zinc	ppm	ASTM D5185m	1180	1238		
Sulfur	ppm	ASTM D5185m	2600	2783		
CONTAMINAN	ITS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	40		
Sodium	ppm	ASTM D5185m		5		
Potassium	ppm	ASTM D5185m	>20	90		
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.3		
Nitration	Abs/cm	*ASTM D7624	>20	9.5		
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.3		
FLUID DEGRAI	DATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	21.9		
Base Number (BN)	mg KOH/g	ASTM D2896		5.9		



# **OIL ANALYSIS REPORT**

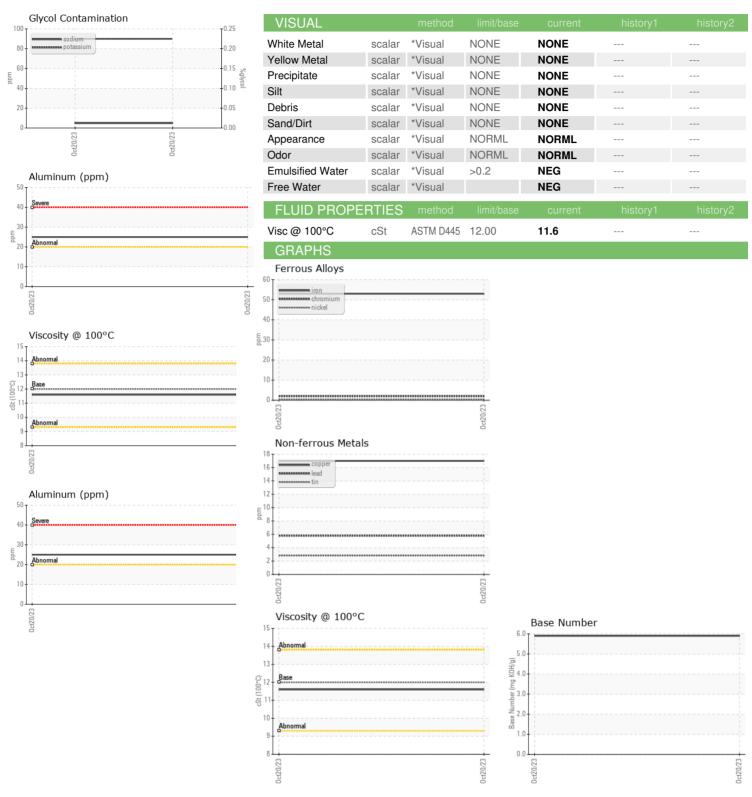





Certificate L2367

Laboratory Sample No. Lab Number Unique Number

: PCA0107384 : 05998617 : 10726977 Test Package : FLEET

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 06 Nov 2023 Diagnosed : 07 Nov 2023 Diagnostician

: Don Baldridge

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Transervice - Shop 1370 - Berkeley-Perrysburg

28727 Oregon Road Perrysburg, OH US 43551 Contact: Curtis Hart

chart@transervice.com T: (419)666-3277

F: (419)666-3279