


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

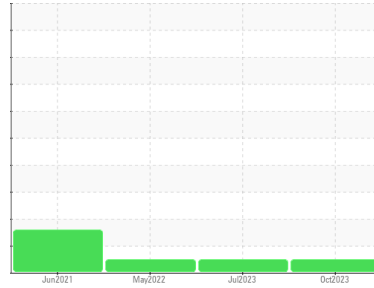

Machine Id  
**108941**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 10W30 (--- QTS)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

#### Wear

Metal levels are typical for a new component breaking in.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0108372</b>	PCA0100755	PCA0073272
Sample Date	Client Info		<b>25 Oct 2023</b>	06 Jul 2023	10 May 2022
Machine Age	mls	Client Info	<b>50902</b>	0	18475
Oil Age	mls	Client Info	<b>50902</b>	4949	3000
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>13</b>	15	61
Chromium	ppm	ASTM D5185m >20	<b>0</b>	<1	1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	2	7
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	2
Aluminum	ppm	ASTM D5185m >20	<b>1</b>	1	11
Lead	ppm	ASTM D5185m >40	<b>0</b>	1	5
Copper	ppm	ASTM D5185m >330	<b>5</b>	9	345
Tin	ppm	ASTM D5185m >15	<b>0</b>	<1	2
Antimony	ppm	ASTM D5185m	<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>2</b>	5	12
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>58</b>	57	52
Manganese	ppm	ASTM D5185m 0	<b>0</b>	<1	3
Magnesium	ppm	ASTM D5185m 950	<b>909</b>	952	883
Calcium	ppm	ASTM D5185m 1050	<b>1154</b>	1229	1394
Phosphorus	ppm	ASTM D5185m 995	<b>994</b>	1025	1012
Zinc	ppm	ASTM D5185m 1180	<b>1252</b>	1258	1234
Sulfur	ppm	ASTM D5185m 2600	<b>3041</b>	3712	2499

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>3</b>	3	9
Sodium	ppm	ASTM D5185m	<b>8</b>	5	7
Potassium	ppm	ASTM D5185m >20	<b>0</b>	1	10



### INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>1</b>	0.8	1.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.4</b>	8.3	11.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.9</b>	19.5	22.2

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>15.9</b>	15.1	17.9
Base Number (BN)	mg KOH/g	ASTM D2896	<b>8.5</b>	9.2	7.8









# OIL ANALYSIS REPORT

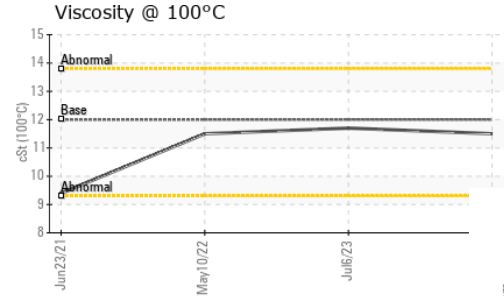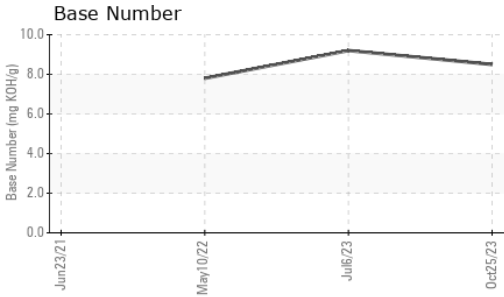

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.5	11.7

## GRAPHS

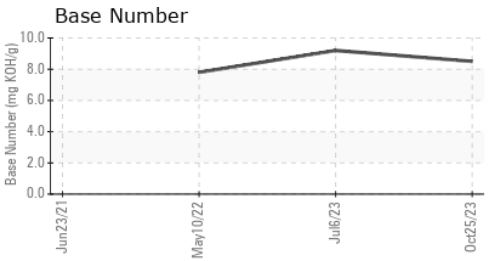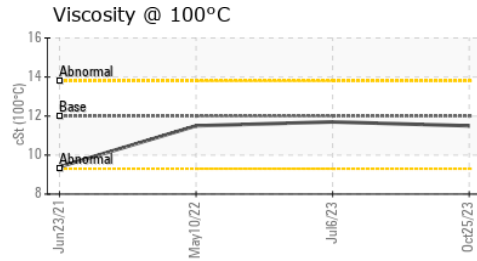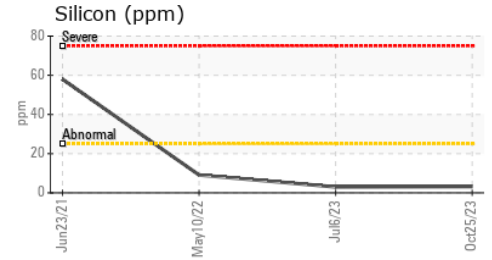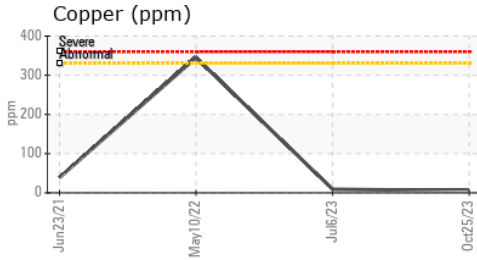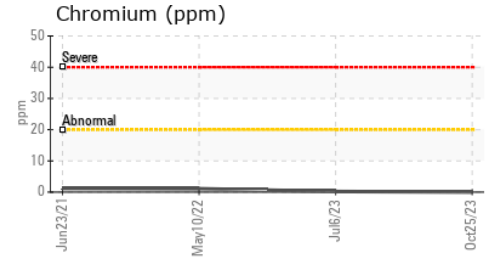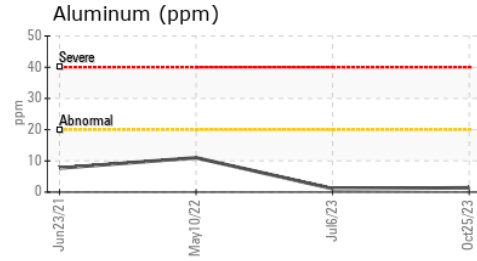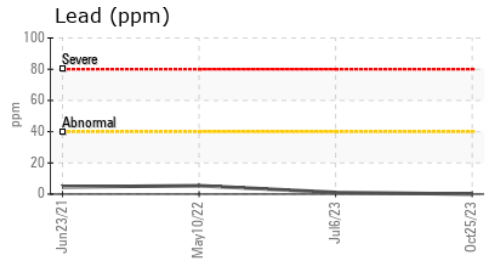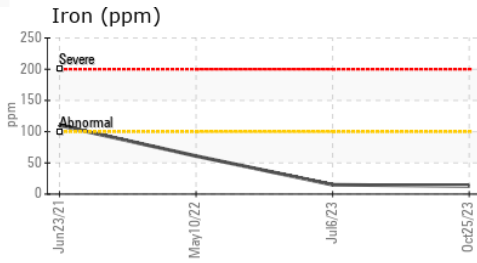

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0108372 **Received** : 06 Nov 2023  
**Lab Number** : 05998738 **Diagnosed** : 06 Nov 2023  
**Unique Number** : 10727098 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**MILLER TRUCK LEASING #118**  
 2196 BENNETT ROAD  
 PHILADELPHIA, PA  
 US 19116  
 Contact: ROSTY VITER  
 rviter@millertransgroup.com  
 T: (215)552-9832  
 F: (215)552-9892

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)