




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

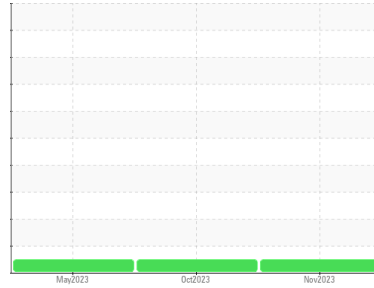

Machine Id  
**813023**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 40 (24 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0092720</b>	GFL0092708	GFL0072430
Sample Date	Client Info		<b>02 Nov 2023</b>	30 Oct 2023	23 May 2023
Machine Age	hrs	Client Info	<b>3398</b>	3398	0
Oil Age	hrs	Client Info	<b>149</b>	614	1350
Oil Changed	Client Info		<b>Not Chngd</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>6</b>	59	56
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	2	2
Nickel	ppm	ASTM D5185m >5	<b>&lt;1</b>	6	5
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	4	6
Lead	ppm	ASTM D5185m >40	<b>0</b>	<1	9
Copper	ppm	ASTM D5185m >330	<b>2</b>	50	109
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	2	4
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	<b>13</b>	3	9
Barium	ppm	ASTM D5185m 10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 100	<b>61</b>	68	65
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	2	3
Magnesium	ppm	ASTM D5185m 450	<b>969</b>	949	907
Calcium	ppm	ASTM D5185m 3000	<b>1163</b>	1259	1191
Phosphorus	ppm	ASTM D5185m 1150	<b>1060</b>	987	962
Zinc	ppm	ASTM D5185m 1350	<b>1333</b>	1274	1232
Sulfur	ppm	ASTM D5185m 4250	<b>3278</b>	2564	2630

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	9	16
Sodium	ppm	ASTM D5185m >216	<b>&lt;1</b>	0	8
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	19	8

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.2</b>	1.3	1.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.0</b>	12.6	12.1
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.2</b>	24.7	23.8

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.7</b>	23.2	22.2
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	<b>8.6</b>	5.1	6.2







# OIL ANALYSIS REPORT

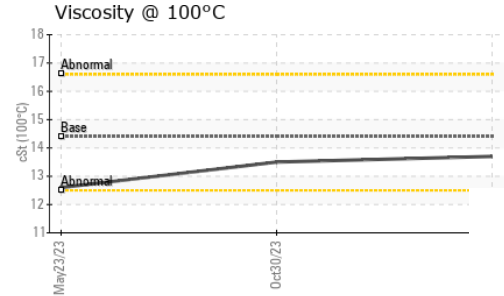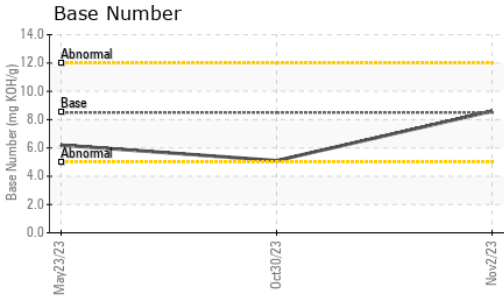

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.7</b>	13.5	12.6

## GRAPHS

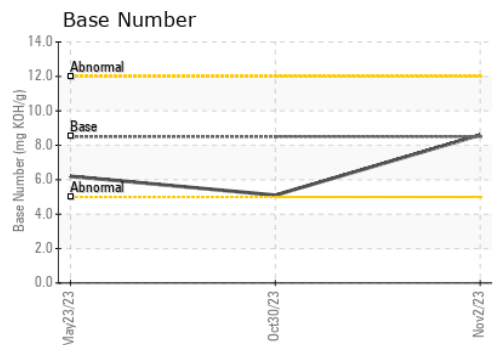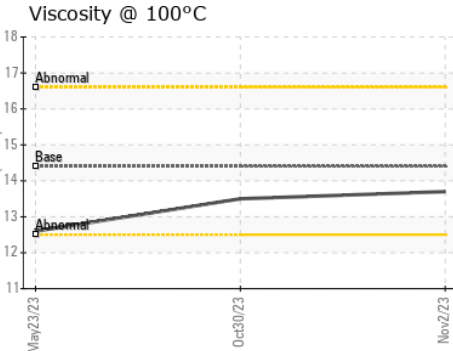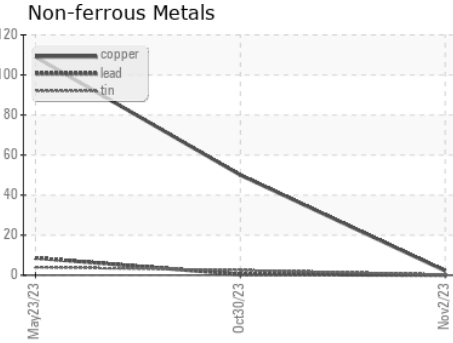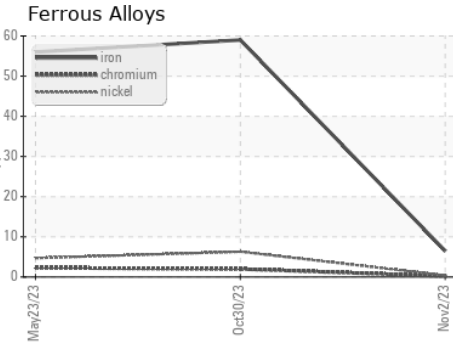

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0092720 **Received** : 06 Nov 2023  
**Lab Number** : **05998791** **Diagnosed** : 07 Nov 2023  
**Unique Number** : 10727151 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 005 - Wilson/Tri-East (CNG)**  
 2810 Contentnea Road S  
 Wilson, NC  
 US 27893-8501  
 Contact: SPENCER LIGGON  
 spencer.liggon@gflenv.com  
 T: (800)207-6618  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)