




# OIL ANALYSIS REPORT

## Sample Rating Trend

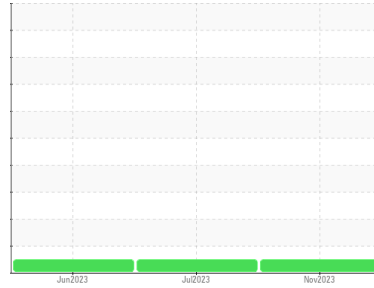

**NORMAL**



Machine Id  
**828017**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 40 (24 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>GFL0092717</b>	GFL0072381	GFL0072426
Sample Date	Client Info			<b>02 Nov 2023</b>	13 Jul 2023	01 Jun 2023
Machine Age	hrs	Client Info		<b>5917</b>	5917	4896
Oil Age	hrs	Client Info		<b>383</b>	754	677
Oil Changed	Client Info			<b>Not Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<b>&lt;1.0</b>	<1.0	<1.0
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>165	<b>6</b>	12	31
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	2
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m	>20	<b>1</b>	<1	1
Lead	ppm	ASTM D5185m	>150	<b>0</b>	0	3
Copper	ppm	ASTM D5185m	>90	<b>&lt;1</b>	3	15
Tin	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	<b>14</b>	8	4
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>61</b>	64	60
Manganese	ppm	ASTM D5185m		<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185m	450	<b>971</b>	1007	965
Calcium	ppm	ASTM D5185m	3000	<b>1158</b>	1239	1128
Phosphorus	ppm	ASTM D5185m	1150	<b>1056</b>	1113	982
Zinc	ppm	ASTM D5185m	1350	<b>1343</b>	1378	1317
Sulfur	ppm	ASTM D5185m	4250	<b>3329</b>	3953	3070



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>35	<b>6</b>	4	7
Sodium	ppm	ASTM D5185m	>216	<b>&lt;1</b>	2	5
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	0	<1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>7.5	<b>0.2</b>	0.3	0.6
Nitration	Abs/cm	*ASTM D7624	>20	<b>5.8</b>	6.8	10.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.1</b>	18.6	22.6

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>13.4</b>	14.2	19.2
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>8.7</b>	8.7	6.9







# OIL ANALYSIS REPORT

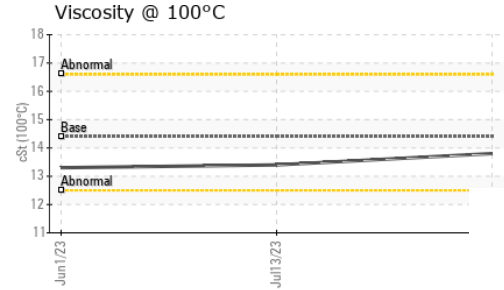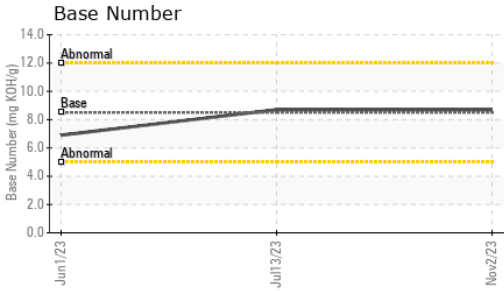

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.8</b>	13.4	13.3

## GRAPHS

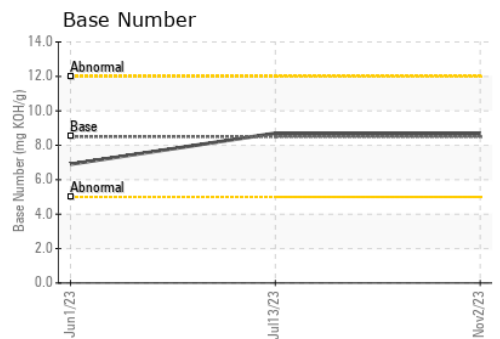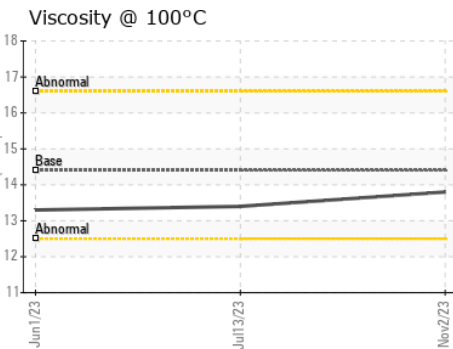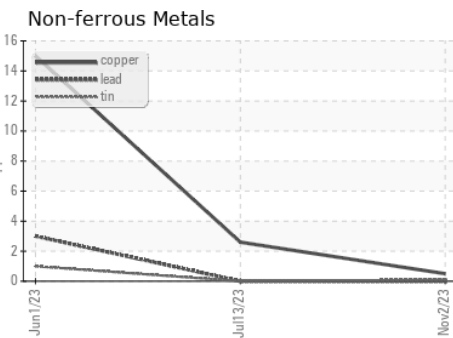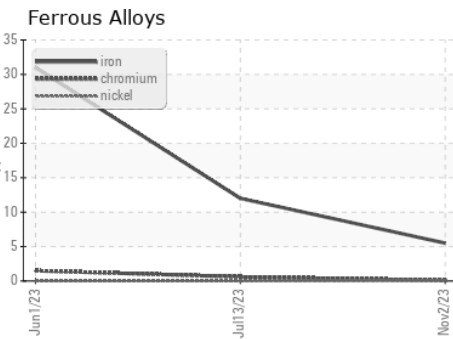

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0092717 **Received** : 06 Nov 2023  
**Lab Number** : **05998794** **Diagnosed** : 07 Nov 2023  
**Unique Number** : 10727154 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 005 - Wilson/Tri-East(CNG)**  
 2810 Contentnea Road S  
 Wilson, NC  
 US 27893-8501  
 Contact: SPENCER LIGGON  
 spencer.liggon@gflenv.com  
 T: (800)207-6618  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)