

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id 3715

Component Diesel Engine

Fluid PETRO CANADA DURON SHP 15W40 (8 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.


Fluid Condition


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		GFL0098787	GFL0070492	GFL0070496
Sample Date		Client Info		02 Nov 2023	09 May 2023	12 Jan 2023
Machine Age	hrs	Client Info		25073	23862	23862
Oil Age	hrs	Client Info		23862	23862	610
Oil Changed		Client Info		N/A	N/A	Changed
Sample Status				NORMAL	NORMAL	NORMAL
CONTAMINAT	ION	method	limit/base	current	history1	history2
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Glycol		WC Method		NEG	NEG	NEG
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>90	11	31	18
Chromium	ppm	ASTM D5185m	>4	<1	2	1
Nickel	ppm	ASTM D5185m	>4	<1	<1	<1
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m		4	10	7
Lead	ppm	ASTM D5185m		0	<1	0
Copper	ppm	ASTM D5185m		<1	4	3
Tin	ppm	ASTM D5185m	>4	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		ام م مالح میں			1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	17	3	6
	ppm ppm		0			
Boron		ASTM D5185m	0	17 0 63	3 2 60	6
Boron Barium	ppm	ASTM D5185m ASTM D5185m	0 0 60	17 0	3 2	6
Boron Barium Molybdenum	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60	17 0 63	3 2 60	6 1 61
Boron Barium Molybdenum Manganese	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0	17 0 63 <1	3 2 60 <1	6 1 61 <1
Boron Barium Molybdenum Manganese Magnesium	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0 1010	17 0 63 <1 963	3 2 60 <1 874	6 1 61 <1 908
Boron Barium Molybdenum Manganese Magnesium Calcium	ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0 1010 1070	17 0 63 <1 963 1118	3 2 60 <1 874 1089	6 1 61 <1 908 1093
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0 1010 1070 1150	17 0 63 <1 963 1118 1056	3 2 60 <1 874 1089 1000	6 1 61 <1 908 1093 989
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 0 1010 1070 1150 1270	17 0 63 <1 963 1118 1056 1315	3 2 60 <1 874 1089 1000 1176	6 1 61 <1 908 1093 989 1174
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 1010 1070 1150 1270 2060	17 0 63 <1 963 1118 1056 1315 3365	3 2 60 <1 874 1089 1000 1176 3060	6 1 61 <1 908 1093 989 1174 3168
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	0 0 60 1010 1070 1150 1270 2060	17 0 63 <1 963 1118 1056 1315 3365 current	3 2 60 <1 874 1089 1000 1176 3060 history1	6 1 61 <1 908 1093 989 1174 3168 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method	0 0 60 1010 1070 1150 1270 2060	17 0 63 <1 963 1118 1056 1315 3365 current 16	3 2 60 <1 874 1089 1000 1176 3060 history1 9	6 1 61 <1 908 1093 989 1174 3168 history2 7
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m	0 0 60 1010 1070 1150 1270 2060 kimit/base >15	17 0 63 <1 963 1118 1056 1315 3365 <u>current</u> 16 5	3 2 60 <1 874 1089 1000 1176 3060 history1 9 20	6 1 61 <1 908 1093 989 1174 3168 history2 7 6
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	0 0 60 0 1010 1070 1150 1270 2060 limit/base >15 >20	17 0 63 <1 963 1118 1056 1315 3365 current 16 5 2	3 2 60 <1 874 1089 1000 1176 3060 history1 9 20 3	6 1 61 <1 908 1093 989 1174 3168 history2 7 6 1
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	0 0 0 1010 1070 1150 1270 2060 2060 >15 >20 20 imit/base >20	17 0 63 <1 963 1118 1056 1315 3365 current 16 5 2 2 current 0.2	3 2 60 <1 874 1089 1000 1176 3060 history1 9 20 3 history1 0.3	6 1 61 <1 908 1093 989 1174 3168 history2 7 6 1 1 history2 0.4
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot %	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	0 0 0 1010 1070 1150 1270 2060 2060 >15 >20 20 imit/base >20	17 0 63 <1 963 1118 1056 1315 3365 current 16 5 2 2	3 2 60 <1 874 1089 1000 1176 3060 history1 9 20 3 3	6 1 61 308 1093 989 1174 3168 history2 7 6 1 1
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	0 0 0 1010 1070 1150 1270 2060 limit/base >15 >20 limit/base >6 >20	17 0 63 <1 963 1118 1056 1315 3365 <i>current</i> 16 5 2 2 <i>current</i> 0.2 5.8	3 2 60 <1 874 1089 1000 1176 3060 history1 9 20 3 history1 0.3 6.7	6 1 61 <1 908 1093 989 1174 3168 history2 7 6 1 history2 0.4 7.2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D7844 *ASTM D7624 *ASTM D7415	0 0 0 1010 1070 1150 1270 2060 2060 2060 215 220 200 200 200 200 200 200 200 200 20	17 0 63 <1 963 1118 1056 1315 3365 <i>current</i> 16 5 2 <i>current</i> 0.2 5.8 17.3 <i>current</i>	3 2 60 <1 874 1089 1000 1176 3060 history1 9 20 3 history1 0.3 6.7 18.4 history1	6 1 61 908 1093 989 1174 3168 history2 7 6 1 history2 0.4 7.2 18.8 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium INFRA-RED Soot % Nitration Sulfation	ppm ppm ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m	0 0 0 1010 1070 1150 1270 2060 2060 2060 215 20 20 20 20 20 20 20 20 20 20 20 20 20	17 0 63 <1 963 1118 1056 1315 3365 current 16 5 2 2 current 0.2 5.8 17.3	3 2 60 <1 874 1089 1000 1176 3060 history1 9 20 3 history1 0.3 6.7 18.4	6 1 61 <1 908 1093 989 1174 3168 history2 7 6 1 history2 0.4 7.2 18.8




OIL ANALYSIS REPORT

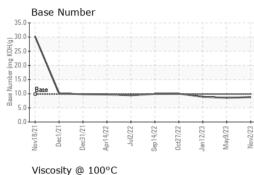



VISUAL		method				history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPE	RTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.2	12.9	13.5
GRAPHS						

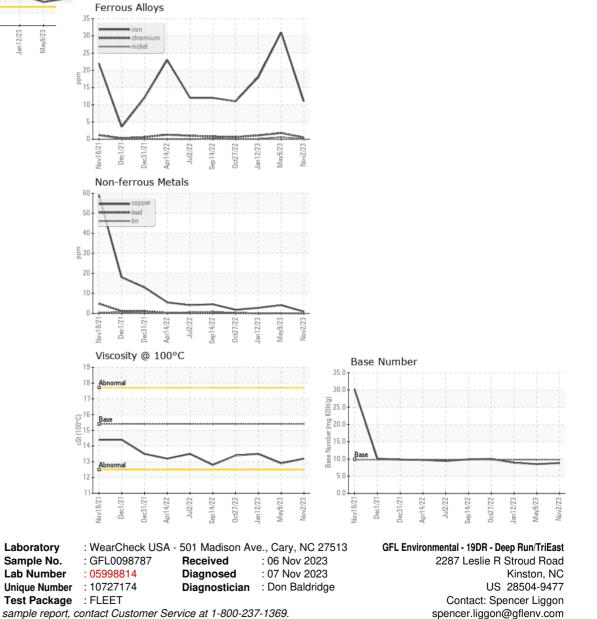



ġ7

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Submitted By: TIMOTHY WATSON

F:

T: (800)207-6618