




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**413020**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 30 (24 QTS)**

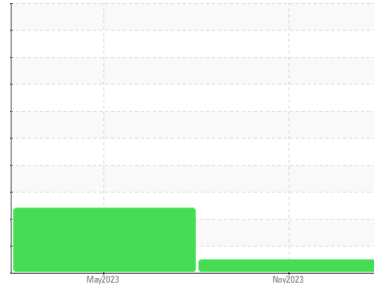

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 30. Please confirm.

### Wear

All component wear rates are normal.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0092657</b>	GFL0072431	---
Sample Date	Client Info		<b>01 Nov 2023</b>	23 May 2023	---
Machine Age	hrs	Client Info	<b>2295</b>	0	---
Oil Age	hrs	Client Info	<b>597</b>	837	---
Oil Changed	Client Info		<b>Changed</b>	Changed	---
Sample Status			<b>NORMAL</b>	ABNORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	0.4	---
Glycol	WC Method		<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>40</b>	53	---
Chromium	ppm	ASTM D5185m >20	<b>2</b>	2	---
Nickel	ppm	ASTM D5185m >5	<b>3</b>	7	---
Titanium	ppm	ASTM D5185m >2	<b>0</b>	<1	---
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	---
Aluminum	ppm	ASTM D5185m >20	<b>14</b>	▲ 18	---
Lead	ppm	ASTM D5185m >40	<b>0</b>	2	---
Copper	ppm	ASTM D5185m >330	<b>38</b>	141	---
Tin	ppm	ASTM D5185m >15	<b>2</b>	4	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	<b>11</b>	82	---
Barium	ppm	ASTM D5185m 10	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m 100	<b>74</b>	111	---
Manganese	ppm	ASTM D5185m	<b>2</b>	5	---
Magnesium	ppm	ASTM D5185m 450	<b>917</b>	770	---
Calcium	ppm	ASTM D5185m 3000	<b>1234</b>	1378	---
Phosphorus	ppm	ASTM D5185m 1150	<b>898</b>	771	---
Zinc	ppm	ASTM D5185m 1350	<b>1246</b>	950	---
Sulfur	ppm	ASTM D5185m 4250	<b>2426</b>	2810	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>21</b>	▲ 72	---
Sodium	ppm	ASTM D5185m >75	<b>2</b>	4	---
Potassium	ppm	ASTM D5185m >20	<b>41</b>	50	---

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.6</b>	0.4	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.3</b>	10.8	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>22.5</b>	24.2	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>19.9</b>	24.0	---
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	<b>5.3</b>	6.6	---







# OIL ANALYSIS REPORT

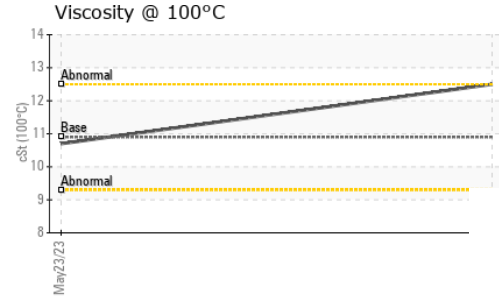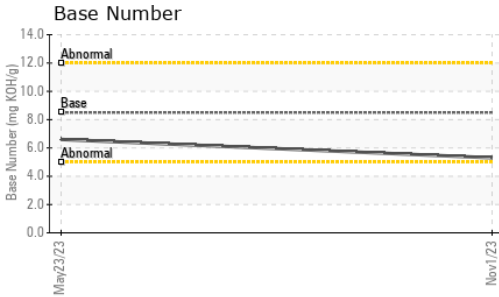

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	10.9	<b>12.5</b>	10.7	---

## GRAPHS

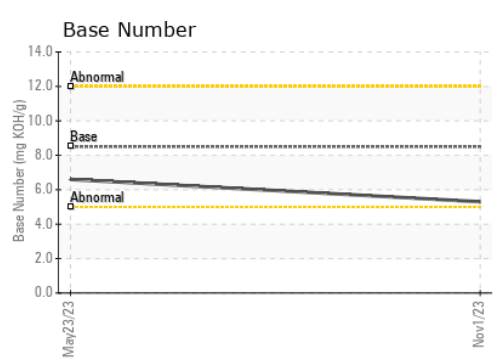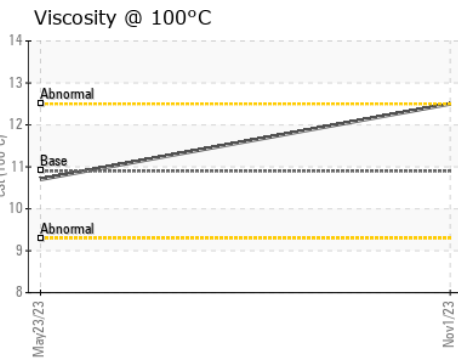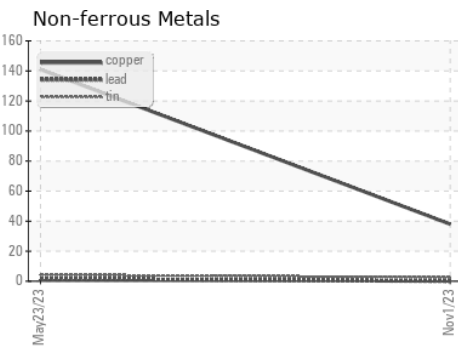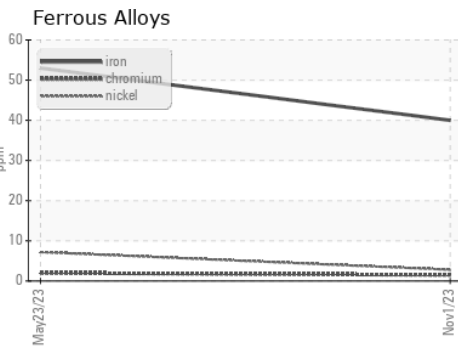

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0092657 **Received** : 06 Nov 2023  
**Lab Number** : **05998817** **Diagnosed** : 07 Nov 2023  
**Unique Number** : 10727177 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 005 - Wilson/Tri-East (CNG)**  
 2810 Contentnea Road S  
 Wilson, NC  
 US 27893-8501  
 Contact: SPENCER LIGGON  
 spencer.liggon@gflenv.com  
 T: (800)207-6618  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)