

OIL ANALYSIS REPORT

{UNASSIGNED} 213015

Component **Diesel Engine DIESEL ENGINE OIL SAE 40 (20 QTS)**

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 40. Please confirm.

Wear


All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

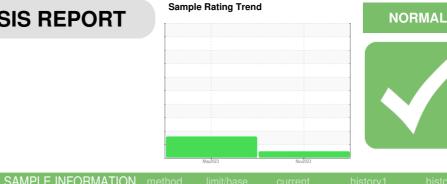


SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		GFL0092658	GFL0072342	
Sample Date		Client Info		01 Nov 2023	23 May 2023	
Machine Age	hrs	Client Info		1871	0	
Oil Age	hrs	Client Info		653	625	
Oil Changed		Client Info		Changed	Changed	
Sample Status				NORMAL	ABNORMAL	
CONTAMINATIO	NC	method	limit/base	current	history1	history2
Fuel		WC Method	>3.0	<1.0	<1.0	
Glycol		WC Method		NEG	NEG	
WEAR METALS	;	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>90	74	74	
Chromium	ppm	ASTM D5185m	>20	3	3	
Nickel	ppm	ASTM D5185m	>2	<1	<1	
Titanium	ppm	ASTM D5185m	>2	0	<1	
Silver	ppm	ASTM D5185m	>2	0	0	
Aluminum	ppm	ASTM D5185m	>20	16	11	
Lead	ppm	ASTM D5185m	>40	0	2	
Copper	ppm	ASTM D5185m	>330	10	46	
Tin	ppm	ASTM D5185m	>15	<1	<1	
Vanadium	ppm	ASTM D5185m		<1	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	7	35	
Barium	ppm	ASTM D5185m	10	<1	4	
Molybdenum	ppm	ASTM D5185m	100	59	42	
Manganese	ppm	ASTM D5185m		2	6	
Magnesium	ppm	ASTM D5185m	450	905	547	
Calcium	ppm	ASTM D5185m	3000	1241	1631	
Phosphorus	ppm	ASTM D5185m	1150	952	719	
Zinc	ppm	ASTM D5185m	1350	1266	907	
Sulfur	ppm	ASTM D5185m	4250	2754	2575	
		and the state			history and	In the target of the


CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	12	4 25	
Sodium	ppm	ASTM D5185m	>216	2	6	
Potassium	ppm	ASTM D5185m	>20	53	23	

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>6	1	0.7	
Nitration	Abs/cm	*ASTM D7624	>20	10.7	11.6	
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.1	25.0	
FLUID DEGRAD	DATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.8	27.4	
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	6.1	7.4	



OIL ANALYSIS REPORT

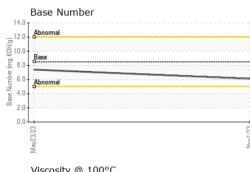



	VISUAL		method	limit/base	current	history1	history2
	White Metal	scalar	*Visual	NONE	NONE	NONE	
	Yellow Metal	scalar	*Visual	NONE	NONE	NONE	
	Precipitate	scalar	*Visual	NONE	NONE	NONE	
	Silt	scalar	*Visual	NONE	NONE	NONE	
	Debris	scalar	*Visual	NONE	NONE	NONE	
	Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	
Nov1/23	Appearance	scalar	*Visual	NORML	NORML	NORML	
No	Odor	scalar	*Visual	NORML	NORML	NORML	
	Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	
	Free Water	scalar	*Visual		NEG	NEG	
	FLUID PROPE	RTIES	method	limit/base	current	history1	history2
	Visc @ 100°C	cSt	ASTM D445	14.4	12.9	13.5	
	GRAPHS						
	Ferrous Alloys						
	70 - chromium						
	60						
	Ē 40 -						
	8 40 30						
	20						
	10						
	3/23 .			Nov1/23 -			
	May23/22			Nov			
	– Non-ferrous Meta	ls					
	⁵⁰ T						
	40						
	40 - 40 - 40 - 40 - 40 - 40 - 40 - 40 -						
	40						
	40 - 40 - 40 - 40 - 40 - 40 - 40 - 40 -						
	40			/			
				/			
	40 30 20 10 0			23			
	40 30 20 10 0			Nov1/23			
	40 30 20 10 0 527EZ/EW			Nov1/23			
	40 30 20 10 CZCZARE W Viscosity @ 100°C			EZ/I/NON 14.0	Base Number		
	40 30 20 10 CZC Zew Viscosity @ 100°C 18 17 Abnormal	5		14.0· 12.0·	Base Number		
	40 30 20 10 10 Viscosity @ 100°C 18 17 Abnormal			14.0· 12.0·	[]		
	40 30 20 10 10 Viscosity @ 100°C 18 17 Abnormal			14.0· 12.0·	[]		
	40 30 20 10 10 Viscosity @ 100°C 18 17 Abnormal			14.0· 12.0·	Abnormal Base		
	40 30 20 10 10 10 10 10 10 10 10 10 1			14.0· 12.0·	[]		
	40 30 20 10 10 10 10 10 10 10 10 10 1			14.0 12.0 (0) HOX 10.0 9 00 8.0 9 9 00 9 9 0 0 0 9 0 0 0 1 0 0 0 0 0 1 0 0 0 1 0 0 1 0 0 0 1 0 0 0 1 0	Abnormal Base		
	40 30 20 10 10 10 10 10 10 10 10 10 1			14.0 12.0 (Ph) 10.0 (Ph) 1	Abnormal Base		
	40 30 20 10 10 10 10 10 10 10 10 10 1			14.0 12.0 10,0 10,0 10,0 10,0 10,0 10,0 10,0 10	Abnormal Base Abnormal		
	40 30 20 10 10 10 10 10 10 10 10 10 1			14.0 12.0 (Ph) 10.0 (Ph) 1	Abnormal Base		
Laboratory Sample No. Lab Number Unique Number Test Package discuss this sample report,	Viscosity @ 100°C	501 Madia Received Diagnos Diagnost	d : 06 ed : 07 tician : We	14.0 12.0 12.0 10.0	Abnormal Base Abnormal	ronmental - 005 - Wi 2810 Cont	tentnea Road Wilson, N JS 27893-85 NCER LIGGO

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Ē

F: